
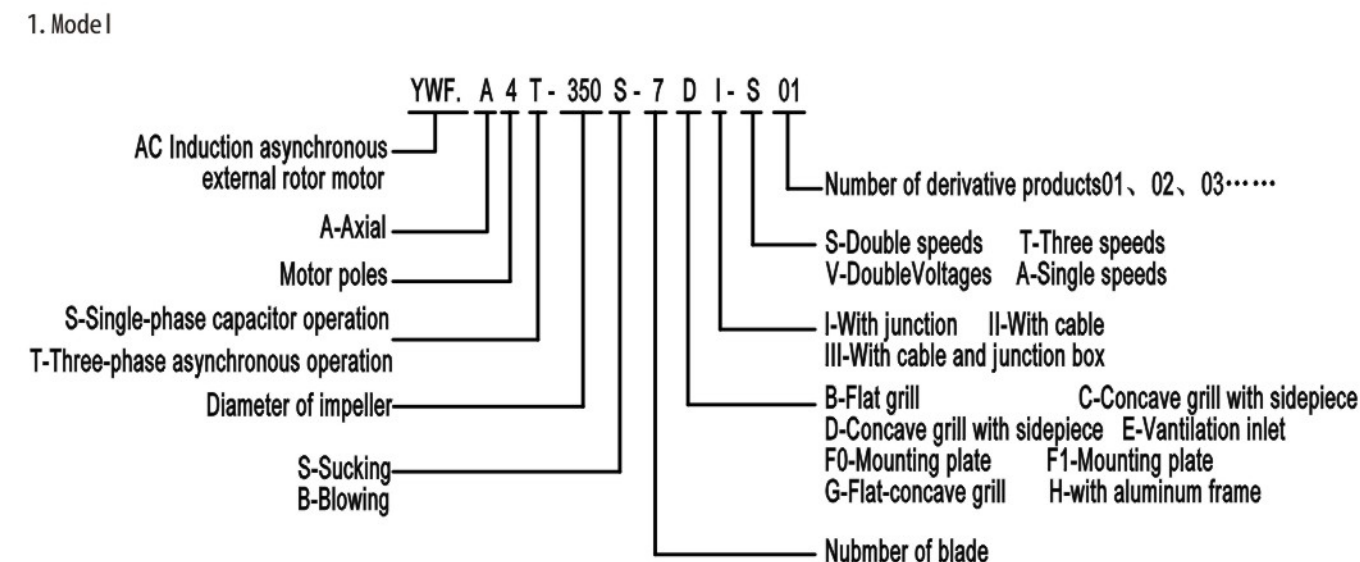


产品介绍

Product Introduction

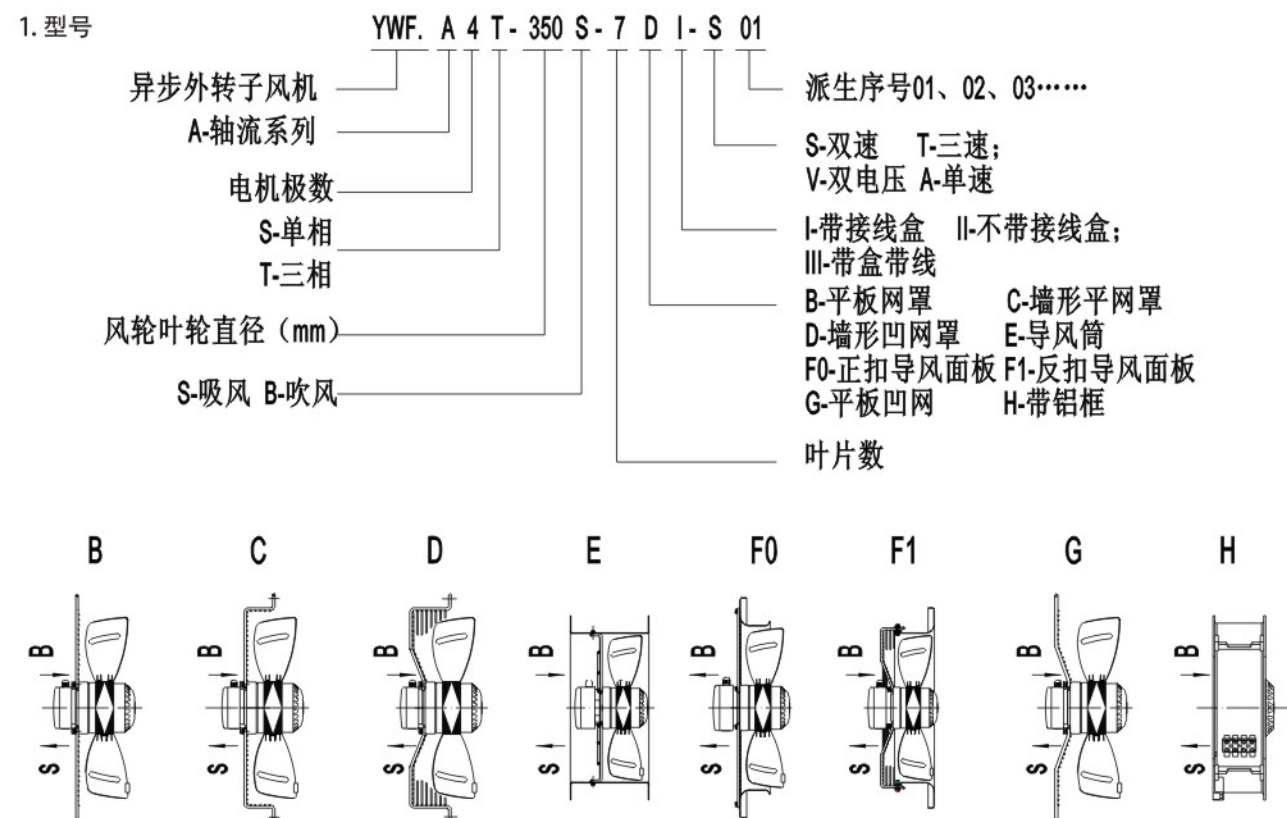

- 外转子轴流风机系列产品具有结构紧凑、运行可靠、噪声低、安装方便、节能高效等特点。
- 外转子轴流风机分为单相异步电容运转和三相异步运转两种。广泛应用于蒸发器，冷凝器，冷水机，热泵及通风循环领域。
- 100%可变速外转子电机启动电流小，电机防护等级可达IP54，绝缘等级为B、F级。
- 单相电机内部均设有热保护器，可在-30℃~60℃的环境温度中运行。三相电机若需安装热保护器，订货时应说明。
- 电压：单相电容运转电机为220V/50Hz/60Hz，三相电机为380V/50Hz/60Hz。我们可根据客户要求生产不同电压、频率的电机。
- 外转子风机可以通过变压器和变频器实现无级变速；三相电机可以通过接线法 Y/△转换来实现双速，抽头调速可以实现多种转速；可控硅调速器可以手动调节通过改变输入电压实现无级调速。
- 当客户只需外转子电机（不带风叶和网罩，型号不带安装直径和风叶直径）用于离心风机时，应提供电机工作点的转速，功率和安装数据，最好能提供风轮和蜗壳样品。
- 风量曲线（静压&风量）
我们的风量曲线测试是在密度为1.2Kg/m³，温度为20℃的空气状态下进行，符合国家的标准测试要求。
- 噪音值
技术参数中所示噪声是声压级，根据国家要求，在进风口一米处测得。
- 平均寿命
顿力风机内安装深沟球滚珠轴承。根据应用场合和周围环境的不同，平均寿命L10介于30000与50000小时之间。
- 电机可以直接引线或在电机底部安装IP54接线盒，特殊长度及接线盒需特殊说明。
- 我司所生产的所有电机通过中国CCC和欧洲CE、美洲UL、CUL认证。

- YWF fans with features of compact structure, stable running, low noise, convenient installation, high efficiency etc.
- YWF fans divided into single phase capacitor operation and three phase asynchronous operation, widely used for evaporator, condenser, water cooler, heat pump and ventilation system.
- YWF 100% speed control motor with low starting current, protection class of IP54, and insulation of grade B and F.
- Single phase capacitor operation motor supplied with thermal protector, three phase motor supplied without thermal protector, if customer have special using, pls keep us informed before order. Our fans can be used in ambient temperature of -30 to 60 degree.C
- Voltage:
Single phase motor normally running at 220V/50Hz/60Hz, three phase motor normally running at 380V/50Hz/60Hz, but we can produce according to different requirement of voltage and frequency.
- YWF fans can be controlled speed by frequency transformer or voltage inverter, three phase fans can be adjusted double-speed by Y/△ exchange, or variety speeds by different connection. Also we can control speed by adjusting input voltage with SCR manually.
- If customer need our motor used for their own centrifugal impeller, we need to know the operating points, power, installation details, better provide the sample of impeller and housing.
- Airflow curve (static pressure & volume)
DUNLI airflow curves measured in the air density of 1.2kg/cbm, ambient temperature of 20 degree.C, according to national standard
- Noise value
It is sound pressure level of noise value in our technical data, achieved at the point of 1m from inlet, according to national standard.
- Average lifetime
DUNLI fans installed with ball bearing, average lifetime between 30,000 to 50,000 hours base on different environment/condition of using.
- Motors can be supplied with cable directly or IP54 junction box, we can also supply specially as customer's requirements.
- All of DUNLI fans have passed CCC and CE, UL, CUL.

Φ200



Φ200



Ø200-7 系列轴流风机
Ø200-7 Series Axial Fan

材 质: 转子铸铝
Material: Rotor: Aluminum Casting
保护等级: IP44
Protection Class: IP44
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠轴承
Bearings: Ball Bearings

Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
YWF.A2S-200S-7BIA00	YWF.A2S-200S-7CIA00	YWF.A2S-200S-7DIA00	—	YWF.A2S-200S-7FIA00	—
YWF.A4S-200S-7BIA00	YWF.A4S-200S-7CIA00	YWF.A4S-200S-7DIA00	—	YWF.A4S-200S-7FIA00	—
YWF.A2S-200S-7BIA05	YWF.A2S-200S-7CIA05	YWF.A2S-200S-7DIA05	—	YWF.A2S-200S-7FIA05	—
YWF.A2S-200S-5BIA05	YWF.A2S-200S-5CIA05	YWF.A2S-200S-5DIA05	—	YWF.A2S-200S-5FIA05	—
YWF.A4S-200S-5BIA05	YWF.A4S-200S-5CIA05	YWF.A4S-200S-5DIA05	—	YWF.A4S-200S-5FIA05	—

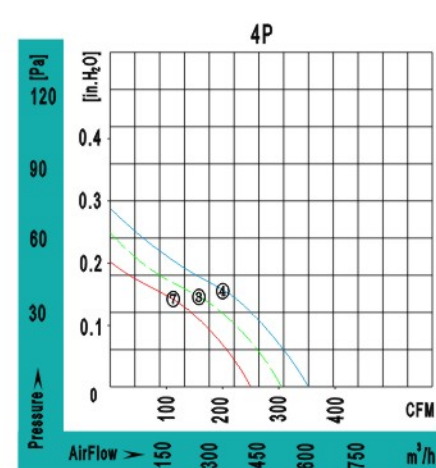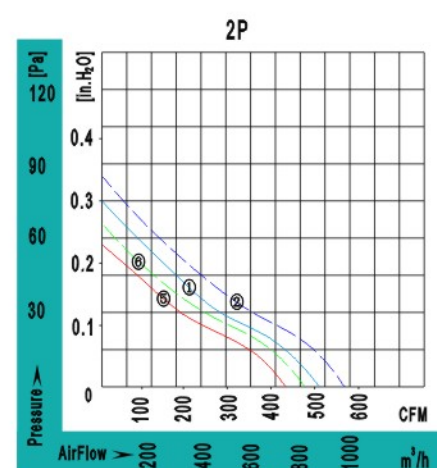

Model No.D


Model No.F0

Model No. E	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
	V	Hz	A	W	RPM	μF	m³/h / CFM	dB (A)	Min / Max (°C)	#	
YWF.A2S-200S-7EIA00	220/230	50	0.30	68	2000	2	880 / 518	53	-30 / +60	①	CCC, CE, RoHS
		60	0.34	75	2200		980 / 576	54		②	CCC, CE, RoHS
YWF.A4S-200S-7EIA00	380/400	50	0.21	40	1400	1.5	510 / 300	43	-30 / +60	③	CCC, CE, RoHS
		60	0.23	50	1500		600 / 352	45		④	CCC, CE, RoHS
YWF.A2S-200S-7EIA05	115/120	50	0.58	64	2000	8	880 / 518	53	-30 / +60	①	RoHS
		60	0.61	74	2200		980 / 576	54		②	RoHS, UL
YWF.A2S-200S-5EIA05	115/120	50	0.40	45	2450	6	745 / 438	50	-30 / +60	⑤	RoHS
		60	0.45	55	2800		820 / 482	51		⑥	RoHS, UL
YWF.A4S-200S-5EIA05	115/120	50	0.17	19	1350	2	425 / 250	43	-30 / +60	⑦	RoHS
		60	0.18	20	1600		510 / 300	45		⑧	RoHS, UL


Φ200

Φ200


Model No. B

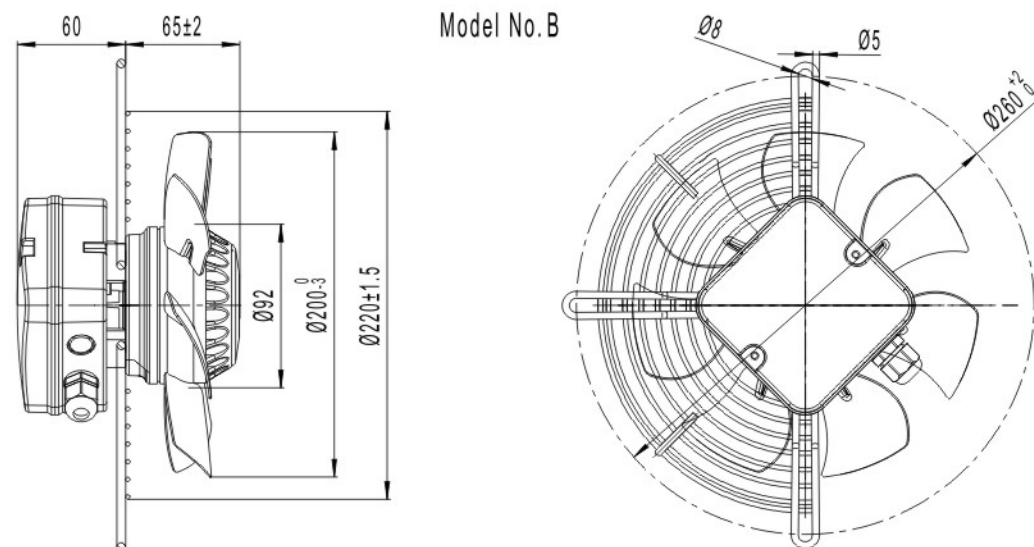

Model No. C

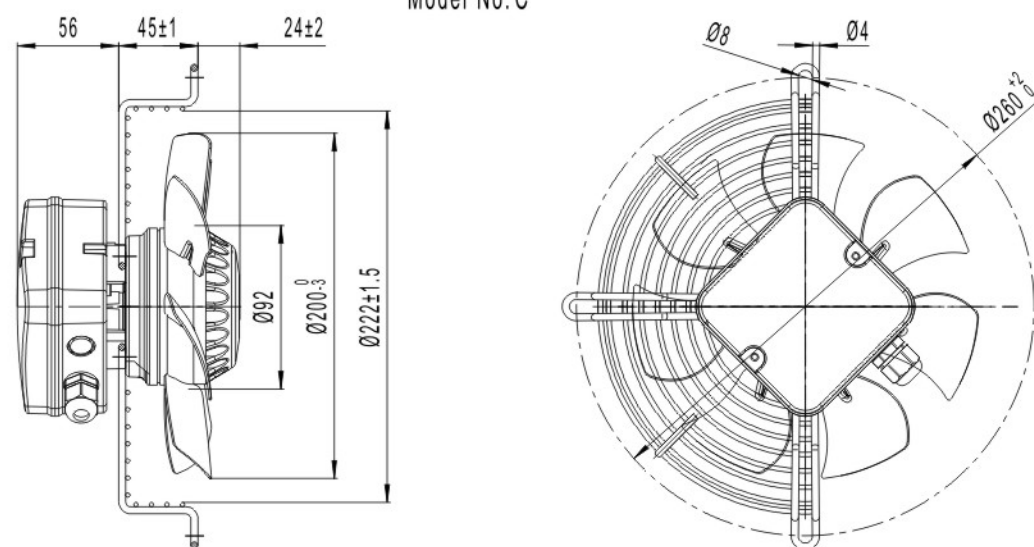


Model No. E

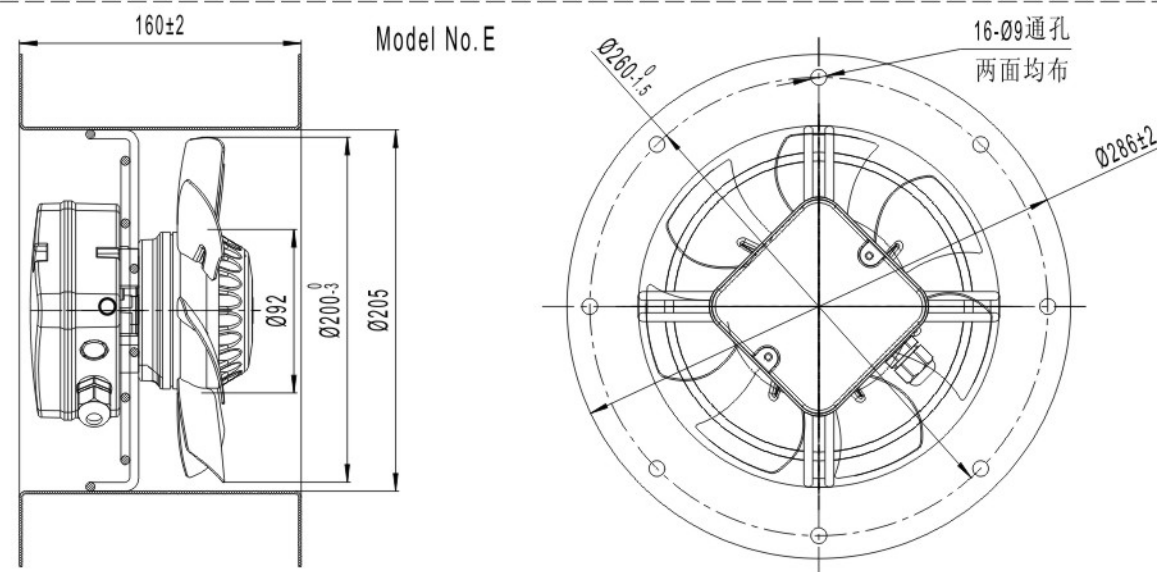


Ø200-7 系列铝框风机 Ø200-7 Series With Aluminum Frame

材质: 转子铸铝
保护等级: IP44
绝缘等级: F
轴承: 免维护滚珠轴承

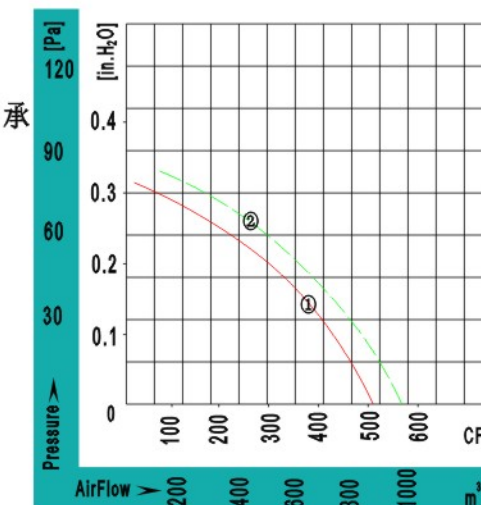

Material: Rotor: Aluminum Casting
Protection Class: IP44
Insulation Class: F
Bearings: Ball Bearings

	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.
Model No.H	V	Hz	A	W	RPM	μF	m³/h / CFM	dB (A)	Min / Max (°C)	#
YWF.A2S-200S-7HIIA00	220/230	50	0.30	68	2000	2	880 / 518	55	-30 / +80	①
		60	0.33	75	2200		980 / 576	58		②
YWF.A2S-200S-7HIIA05	115/120	50	0.58	64	2000	8	880 / 518	55	-30 / +80	①
		60	0.61	74	2200		980 / 576	58		②

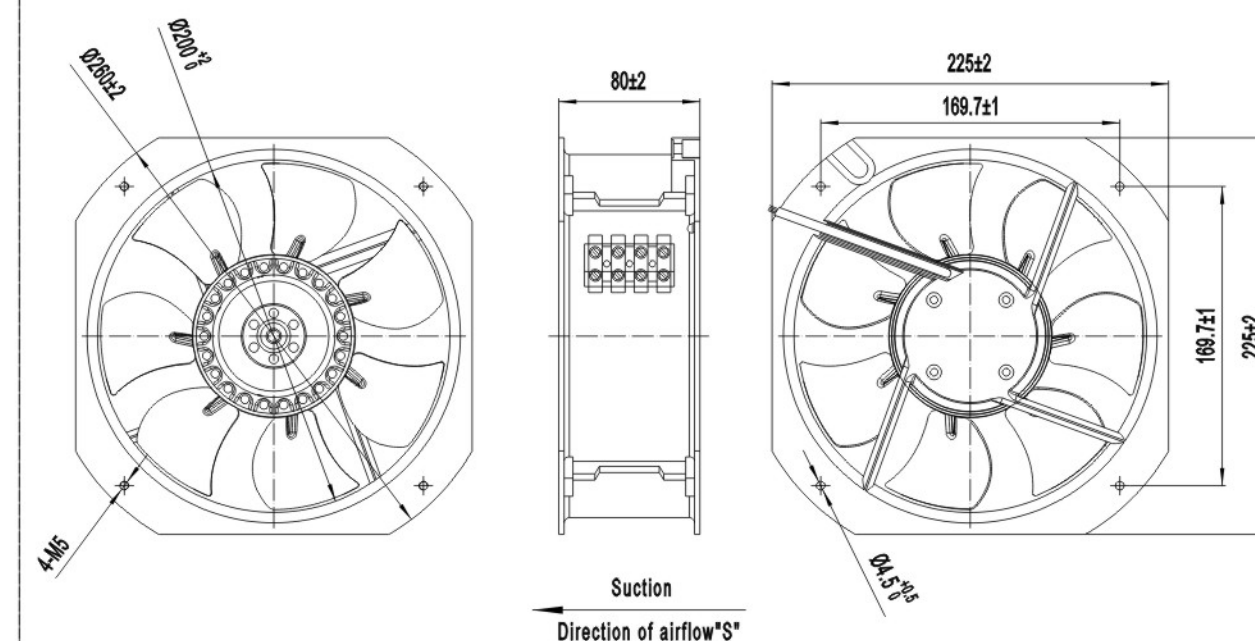

Φ250




Φ250



Ø250-7 系列轴流风机
Ø250-7 Series Axial Fan

材 质: 转子铸铝
Material: Rotor: Aluminum Casting
保护等级: IP44
Protection Class: IP44
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠轴承
Bearings: Ball Bearings


Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
YWF.A2S-250S-5BIA00	YWF.A2S-250S-5CIA00	YWF.A2S-250S-5DIA00	YWF.A2S-250S-5GIA00		
YWF.A2T-250S-5BIA00	YWF.A2T-250S-5CIA00	YWF.A2T-250S-5DIA00	YWF.A2T-250S-5GIA00		
YWF.A4S-250S-5BIA00	YWF.A4S-250S-5CIA00	YWF.A4S-250S-5DIA00	YWF.A4S-250S-5GIA00		
YWF.A4T-250S-5BIA00	YWF.A4T-250S-5CIA00	YWF.A4T-250S-5DIA00	YWF.A4T-250S-5GIA00		
YWF.A2S-250S-5BIA05	YWF.A2S-250S-5CIA05	YWF.A2S-250S-5DIA05	YWF.A2S-250S-5GIA05		
YWF.A4S-250S-5BIA05	YWF.A4S-250S-5CIA05	YWF.A4S-250S-5DIA05	YWF.A4S-250S-5GIA05		

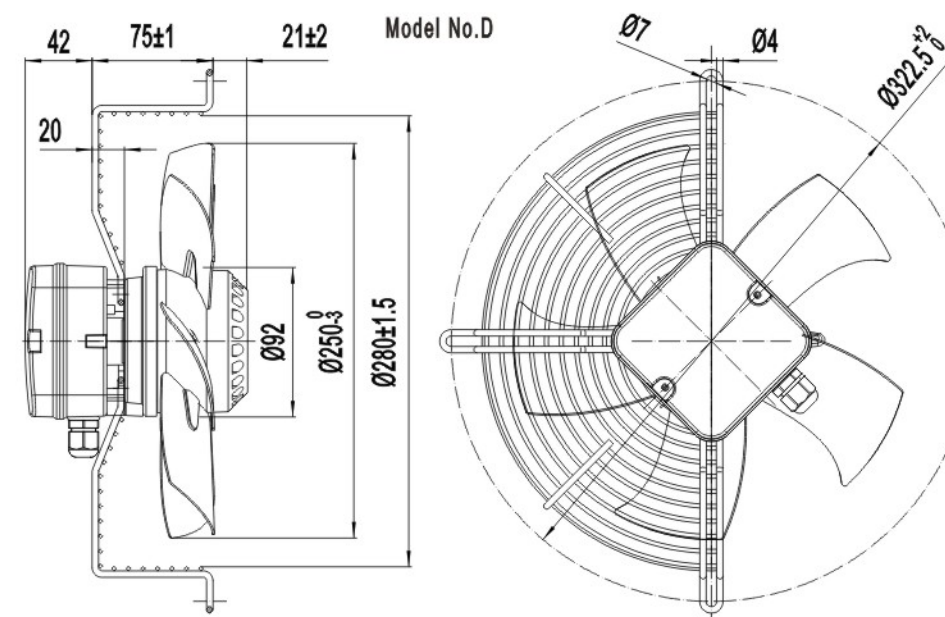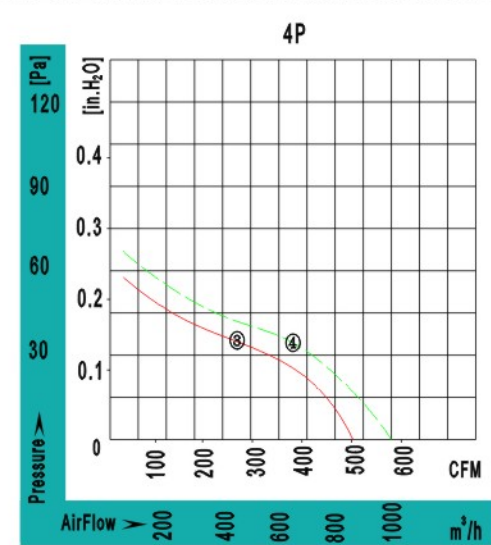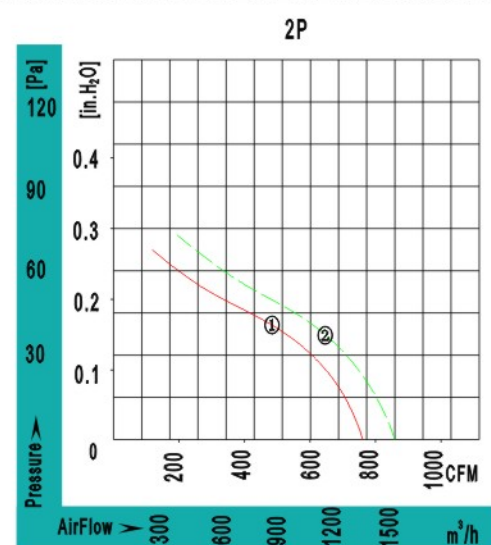

Model No.E	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
	V	Hz	A	W	RPM	μF	m³/h / CFM	dB (A)	Min / Max (°C)	#	
	230	50	0.45	100	2480	3	1330 / 782	56	-30 / +60	①	CCC,CE,RoHS
		60	0.59	130	2800		1500 / 882	57		②	CCC,CE,RoHS,UL
	400	50	0.18	90	2430	/	1330 / 782	56	-30 / +60	①	CCC,CE,RoHS
		60	0.20	116	2550		1500 / 882	57		②	CCC,CE,RoHS,UL
	230	50	0.25	55	1400	2	860 / 505	53	-30 / +60	③	CCC,CE,RoHS
		60	0.30	58	1620		1000 / 588	54		④	CCC,CE,RoHS,UL
	400	50	0.18	60	1400	/	860 / 505	53	-30 / +60	③	CCC,CE,RoHS
		60	0.14	50	1650		1000 / 588	54		④	CCC,CE,RoHS,UL
	115	50	0.93	100	2480	10	1330 / 782	56	-30 / +60	①	RoHS
		60	1.0	120	2850		1500 / 882	57		②	RoHS,UL
	115	50	0.44	48	1350	5	860 / 505	53	-30 / +60	③	RoHS
		60	0.48	55	1600		1000 / 588	54		④	RoHS,UL

Φ250


Φ250

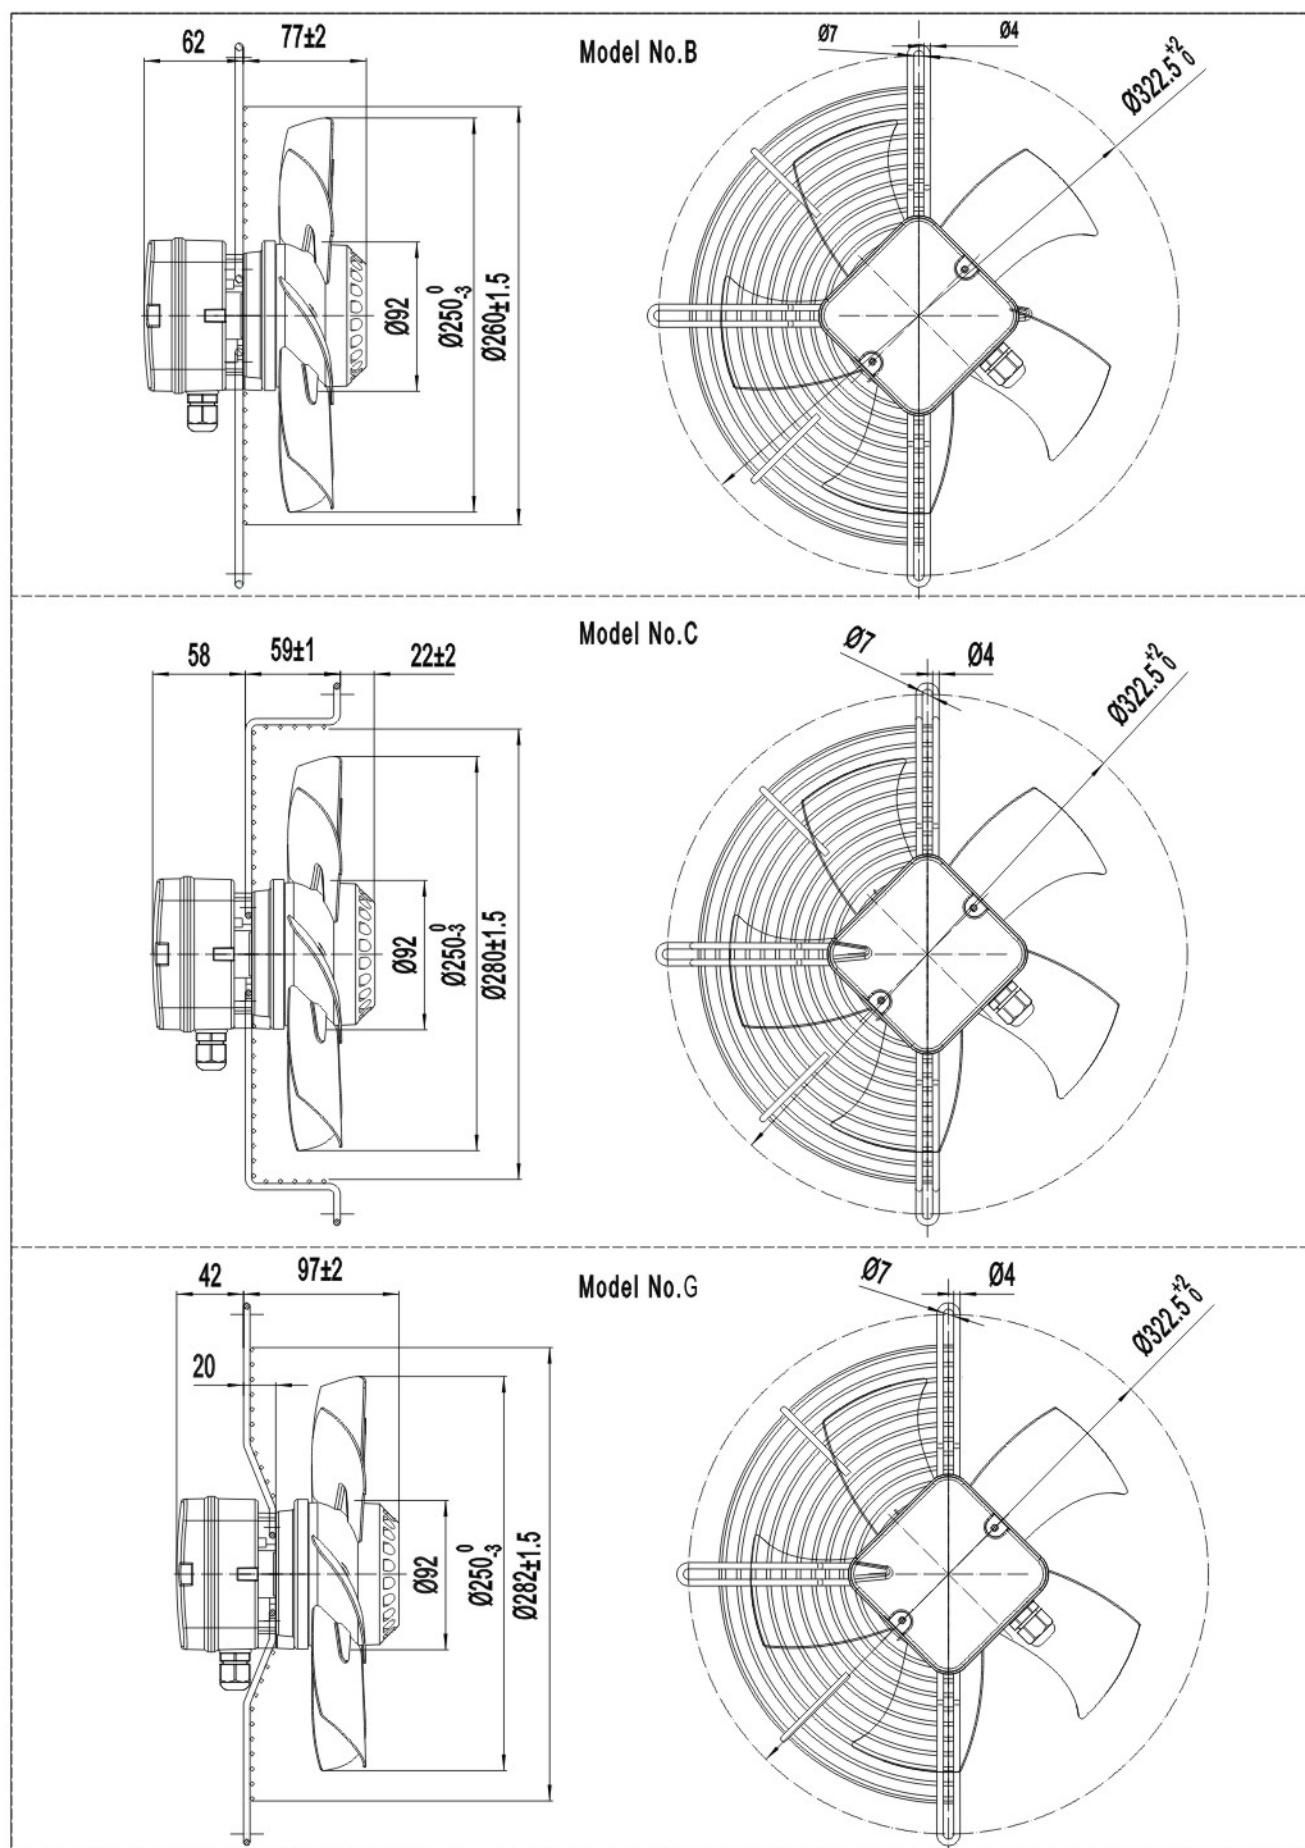


Ø250-7 系列铝框风机
Ø250-7 Series With Aluminum Frame

材 质: 转子铸铝
保护等级: IP44
绝缘等级: F
轴 承: 免维护滚珠轴承

Material: Rotor: Aluminum Casting
Protection Class: IP44
Insulation Class: F
Bearings: Ball Bearings

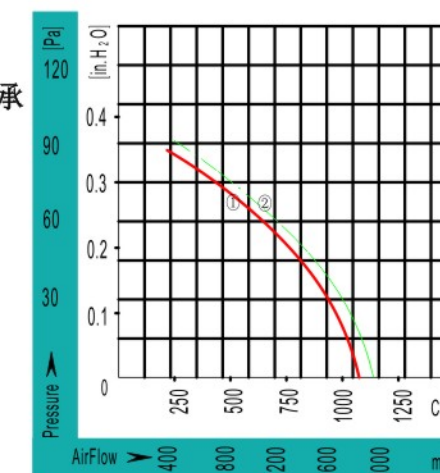

	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
Model No.H	V	Hz	A	W	RPM	μF	m³/h / CFM	dB (A)	Min / Max (°C)	#	
YWF.A2S-250S-7HIIA00	220/230	50	0.50	120	2800	4	1850 / 1088	68	-30 / +60	①	CCC, CE, RoHS
		60	0.65	150	2900		1960 / 1153	72		②	CCC, CE, RoHS
YWF.A2T-250S-7HIIA00	380/400	50	0.19	115	2800	/	1850 / 1088	68	-30 / +60	①	CCC, CE, RoHS
		60	0.20	150	2900		1960 / 1153	72		②	CCC, CE, RoHS
YWF.A2S-250S-7HIIA05	115/120	50	1.10	124	2800	16	1850 / 1088	68	-30 / +60	①	RoHS
		60	1.35	155	2900		1960 / 1153	72		②	RoHS, UL

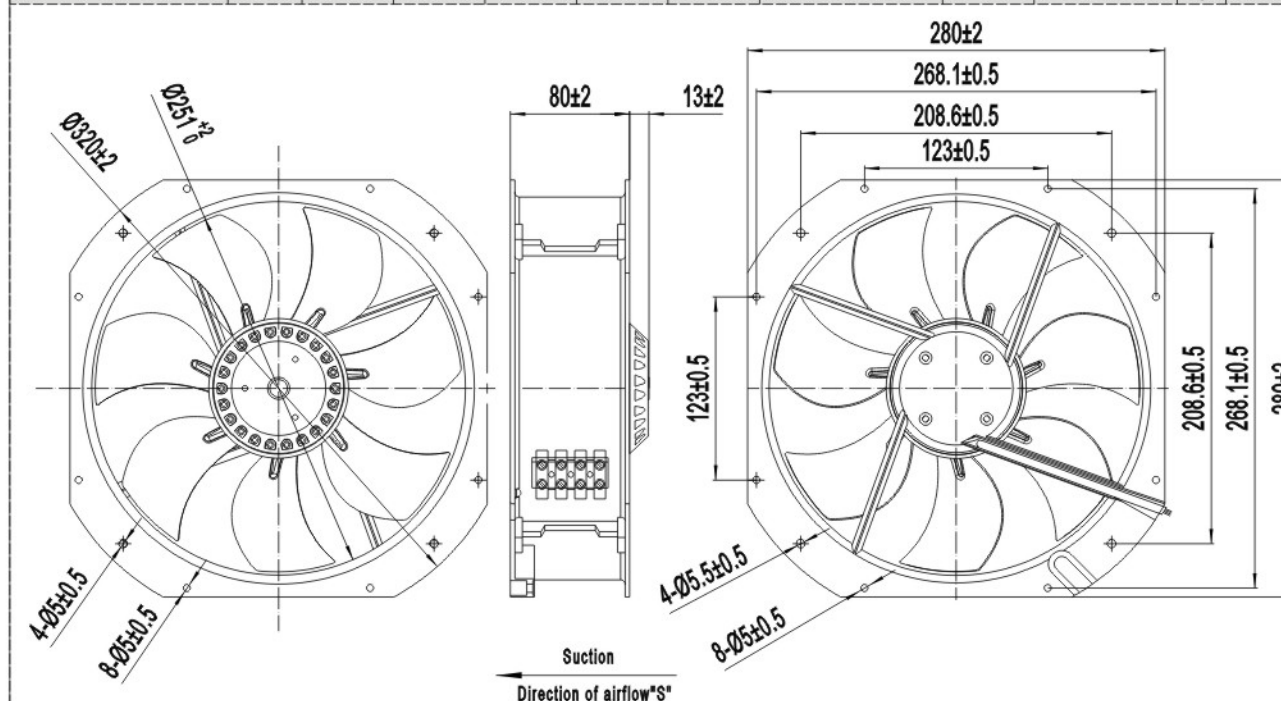

Φ300




Φ300



Ø300-5 系列轴流风机
Ø300-5 Series Axial Fan

材 质: 转子铸铝
Material: Rotor: Aluminum Casting
保护等级: IP44
Protection Class: IP44
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings


Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
YWF.A2S-300S-5BIA00	YWF.A2S-300S-5CIA00	YWF.A2S-300S-5DIA00	YWF.A2S-300S-5GIA00	YWF.A2S-300S-5FIA00	
YWF.A2T-300S-5BIA00	YWF.A2T-300S-5CIA00	YWF.A2T-300S-5DIA00	YWF.A2T-300S-5GIA00	YWF.A2T-300S-5FIA00	
YWF.A4S-300S-5BIA00	YWF.A4S-300S-5CIA00	YWF.A4S-300S-5DIA00	YWF.A4S-300S-5GIA00	YWF.A4S-300S-5FIA00	
YWF.A4T-300S-5BIA00	YWF.A4T-300S-5CIA00	YWF.A4T-300S-5DIA00	YWF.A4T-300S-5GIA00	YWF.A4T-300S-5FIA00	
YWF.A2S-300S-5BIA05	YWF.A2S-300S-5CIA05	YWF.A2S-300S-5DIA05	YWF.A2S-300S-5GIA05	YWF.A2S-300S-5FIA05	
YWF.A4S-300S-5BIA05	YWF.A4S-300S-5CIA05	YWF.A4S-300S-5DIA05	YWF.A4S-300S-5GIA05	YWF.A4S-300S-5FIA05	

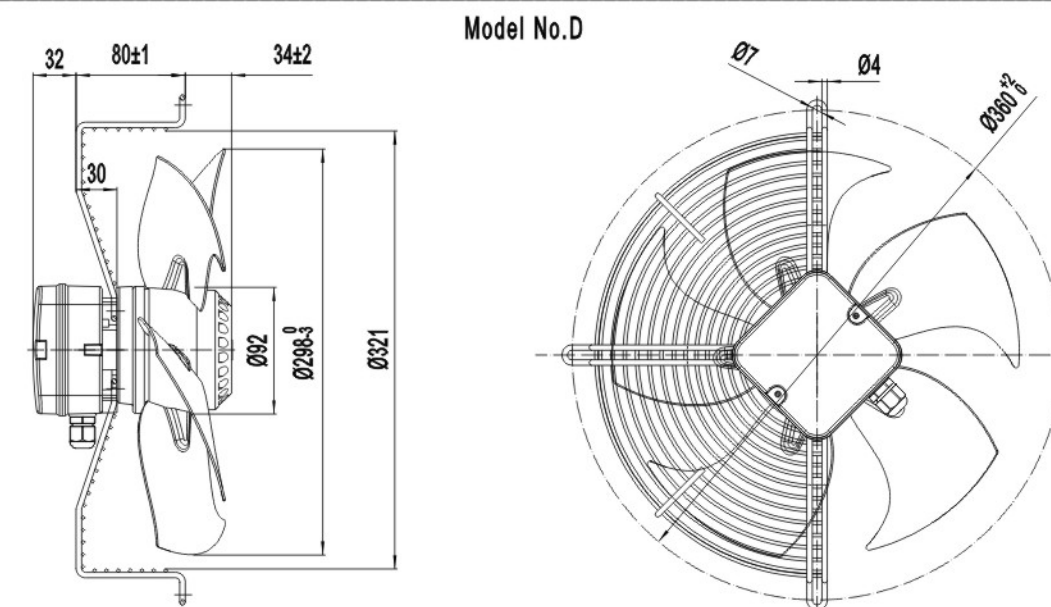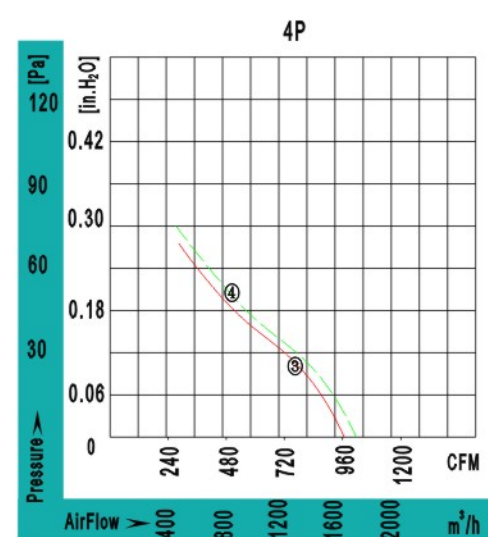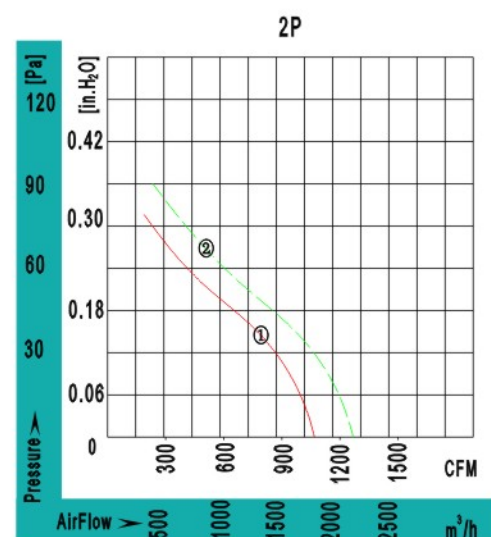



Model No.E	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
YWF.A2S-300S-5EIA00	220/230	50	0.55	124	2400	4	1800 / 1060	58	-30 / +60	①	CCC, CE, RoHS
YWF.A2T-300S-5EIA00	380/400	50	0.25	115	2500	/	1800 / 1060	58	-30 / +60	①	CCC, CE, RoHS
YWF.A4S-300S-5EIA00	220/230	50	0.42	90	1350	3	1800 / 1060	58	-30 / +60	②	CCC, CE, RoHS, UL
YWF.A4T-300S-5EIA00	380/400	50	0.25	115	1600	/	1800 / 1060	58	-30 / +60	③	CCC, CE, RoHS
YWF.A2S-300S-5EIA05	115/120	50	1.1	124	2400	16	1800 / 1060	58	-30 / +60	④	CCC, CE, RoHS, UL
YWF.A4S-300S-5EIA05	115/120	50	0.8	90	1350	10	1800 / 1060	58	-30 / +60	④	CCC, CE, RoHS, UL

Φ300



Φ300

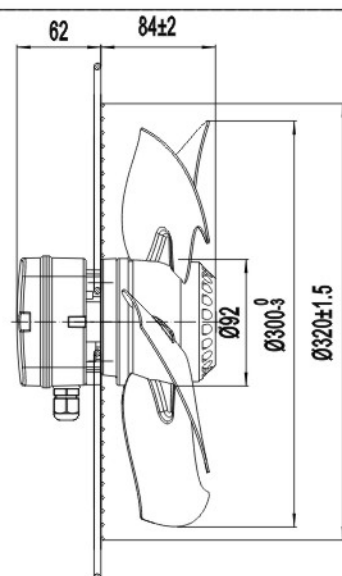



Model No. B

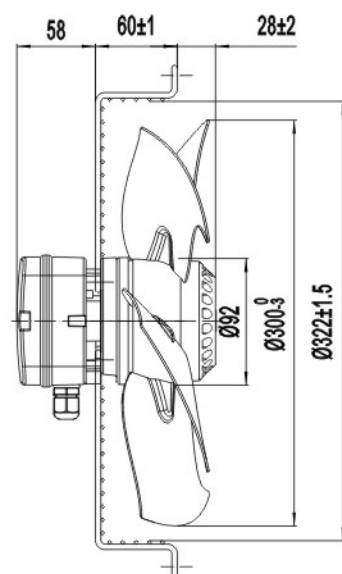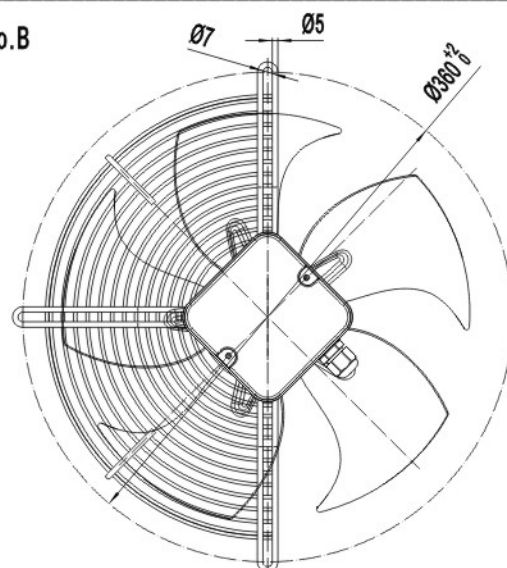



Model No. C

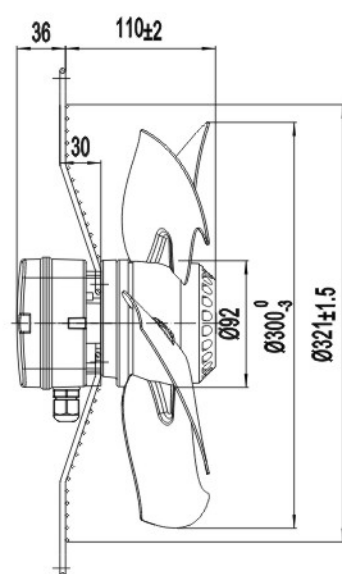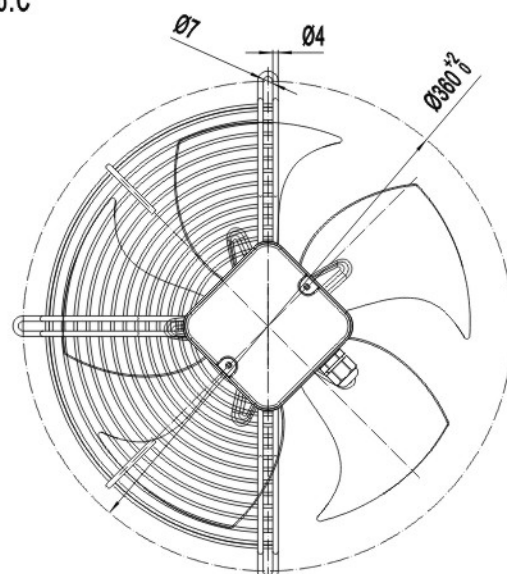


Model No. G

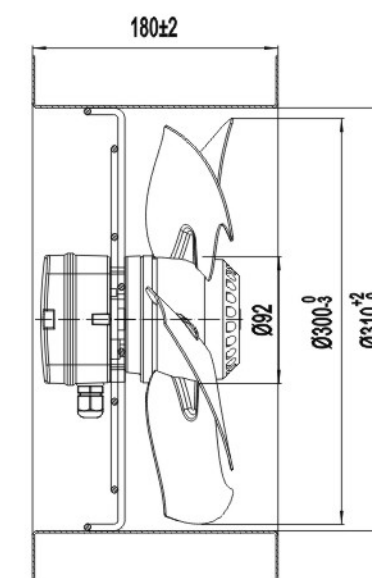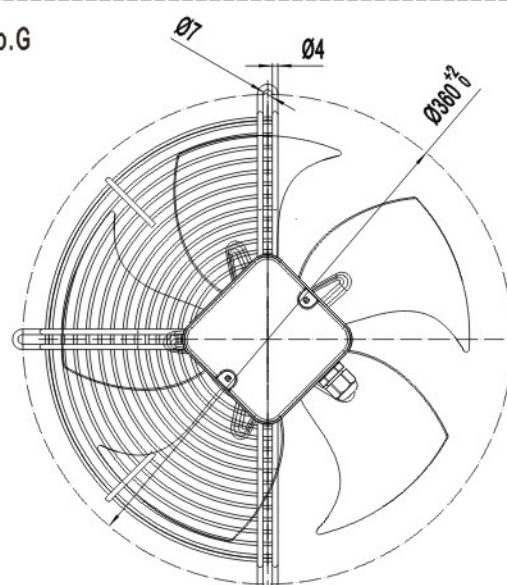

Model No. E

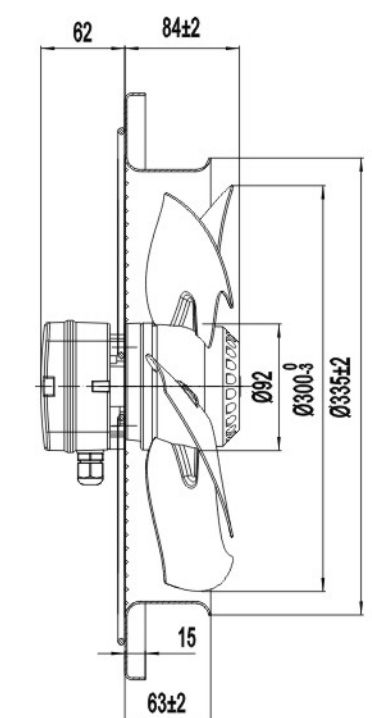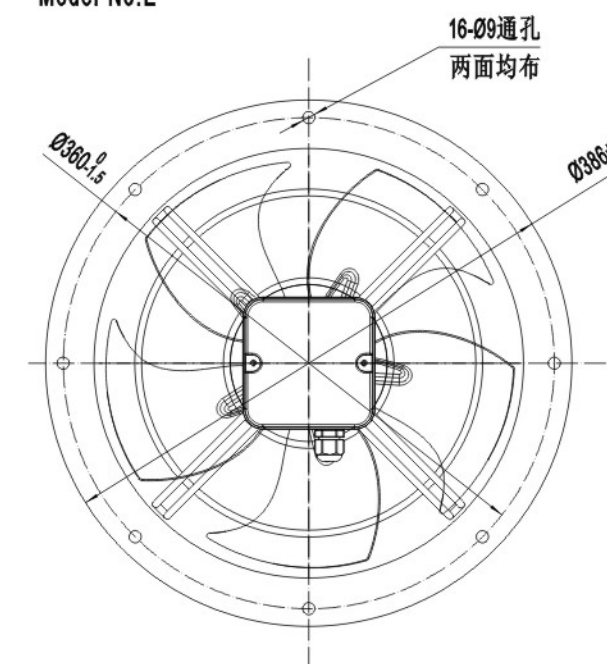

Model No. F0

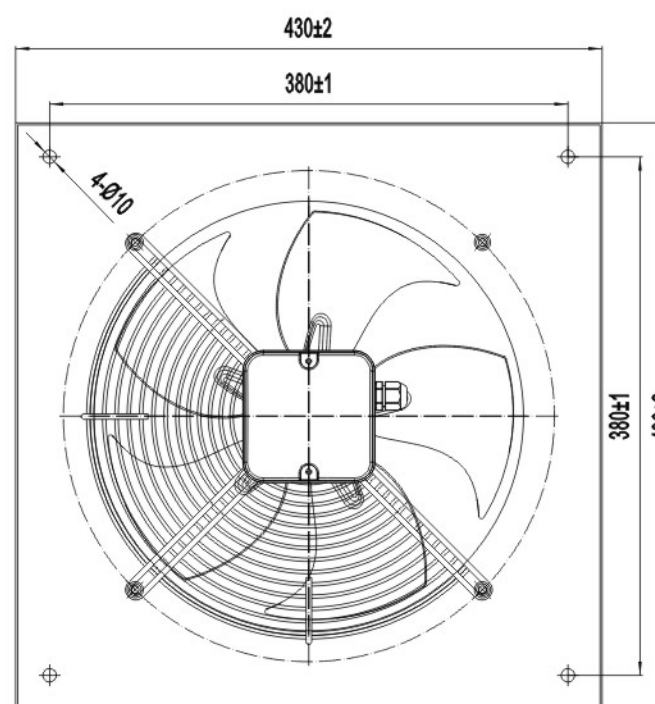

Φ350




Φ350




Ø350-5 系列轴流风机 Ø350-5 Series Axial Fan

材 质: 转子铸铝
Material: Rotor: Aluminum Casting
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings

Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
YWF.A4S-350S-5BIA00	YWF.A4S-350S-5CIA00	YWF.A4S-350S-5DIA00	YWF.A4S-350S-5GIA00	YWF.A4S-350S-5FIA00	YWF.A4S-350S-5FIA01
YWF.A4T-350S-5BIA00	YWF.A4T-350S-5CIA00	YWF.A4T-350S-5DIA00	YWF.A4T-350S-5GIA00	YWF.A4T-350S-5FIA00	YWF.A4T-350S-5FIA01
YWF.A6S-350S-5BIA00	YWF.A6S-350S-5CIA00	YWF.A6S-350S-5DIA00	YWF.A6S-350S-5GIA00	YWF.A6S-350S-5FIA00	YWF.A6S-350S-5FIA01
YWF.A6T-350S-5BIA00	YWF.A6T-350S-5CIA00	YWF.A6T-350S-5DIA00	YWF.A6T-350S-5GIA00	YWF.A6T-350S-5FIA00	YWF.A6T-350S-5FIA01
YWF.A4S-350S-5BIA05	YWF.A4S-350S-5CIA05	YWF.A4S-350S-5DIA05	YWF.A4S-350S-5GIA05	YWF.A4S-350S-5FIA05	YWF.A4S-350S-5FIA15

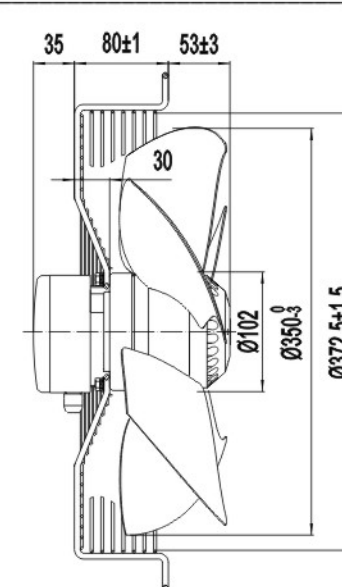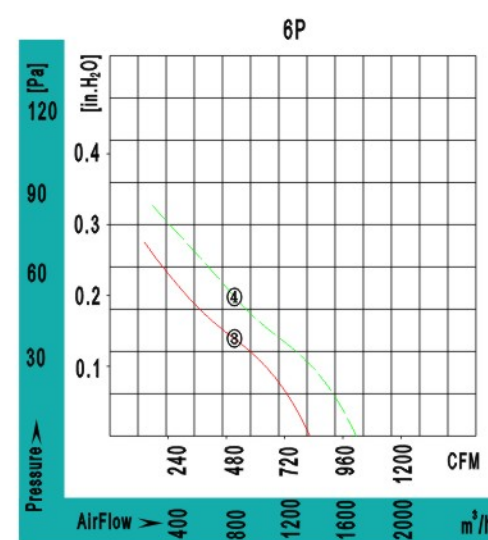
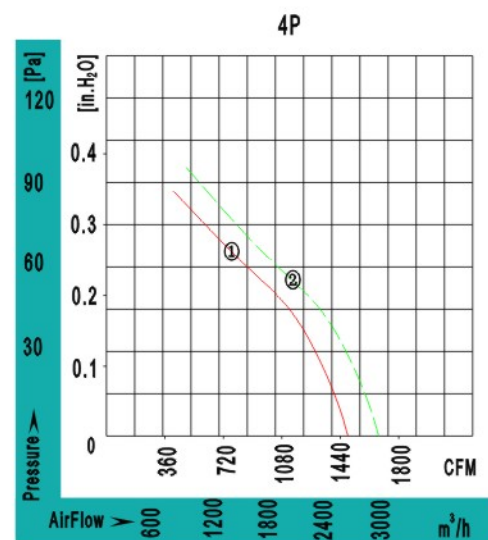


Model No.D

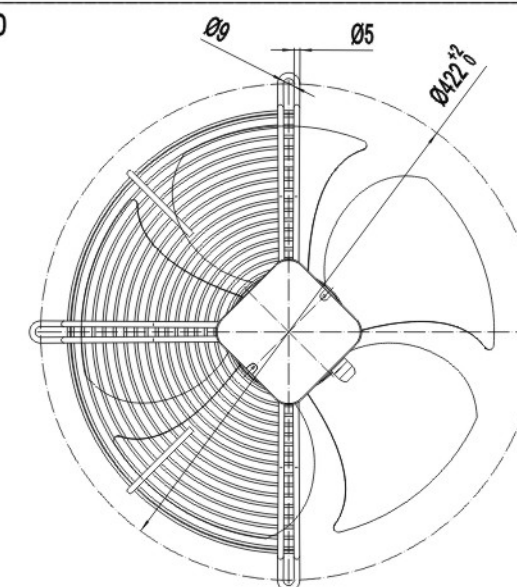

Model No.E	V	Hz	A	W	RPM	μ F	m³/h / CFM	dB (A)	Min / Max (°C)	#	Approvals
YWF.A4S-350S-5EIA00	220/230	50	0.60	135	1380	4	2670 / 1570	58	-30 / +60	①	CCC, CE, RAHS
		60	0.83	190	1550		2900 / 1705	60		②	CCC, CE, RAHS, UL
YWF.A4T-350S-5EIA00	380/400	50	0.30	135	1380	/	2670 / 1570	58	-30 / +60	①	CCC, CE, RAHS
		60	0.34	170	1500		2900 / 1705	60		②	CCC, CE, RAHS, UL
YWF.A6S-350S-5EIA00	220/230	50	0.40	80	950	3	1560 / 920	53	-30 / +60	③	CCC, CE, RAHS
		60	0.37	83	1100		1800 / 1060	54		④	CCC, CE, RAHS, UL
YWF.A6T-350S-5EIA00	380/400	50	0.29	80	920	/	1560 / 920	53	-30 / +60	③	CCC, CE, RAHS
		60	0.20	80	1070		1800 / 1060	54		④	CCC, CE, RAHS, UL
YWF.A4S-350S-5EIA05	115/120	50	1.2	135	1350	12	2670 / 1570	58	-30 / +60	①	RAHS
		60	1.6	175	1500		2900 / 1705	60		②	RAHS, UL


Model No.F1

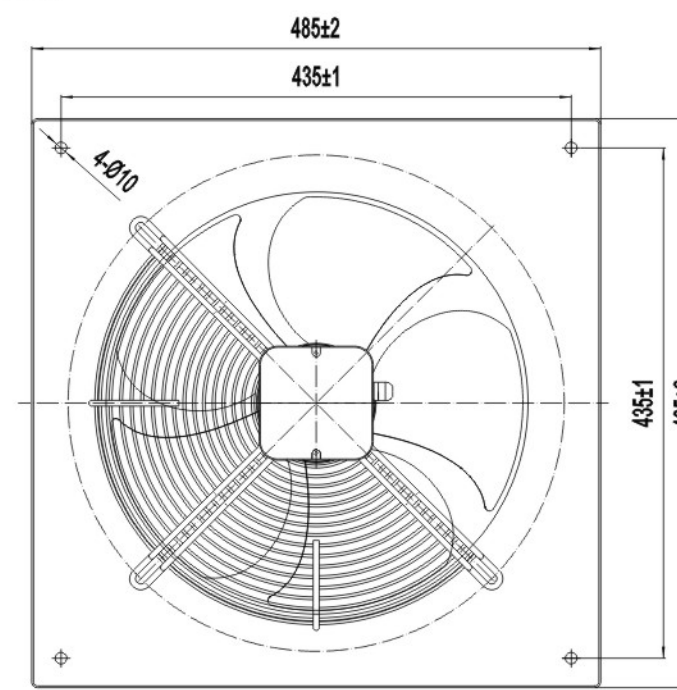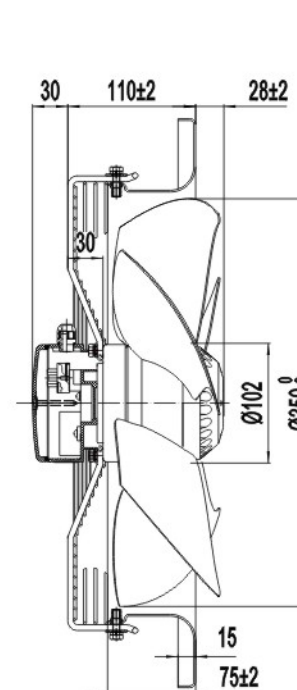


Φ350

Φ350


Model No.B

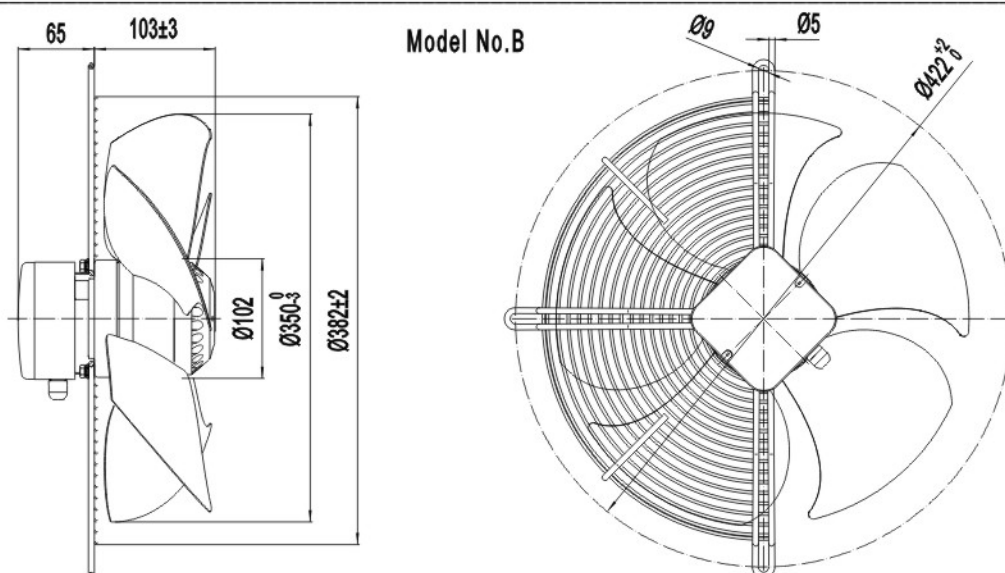


Model No.C

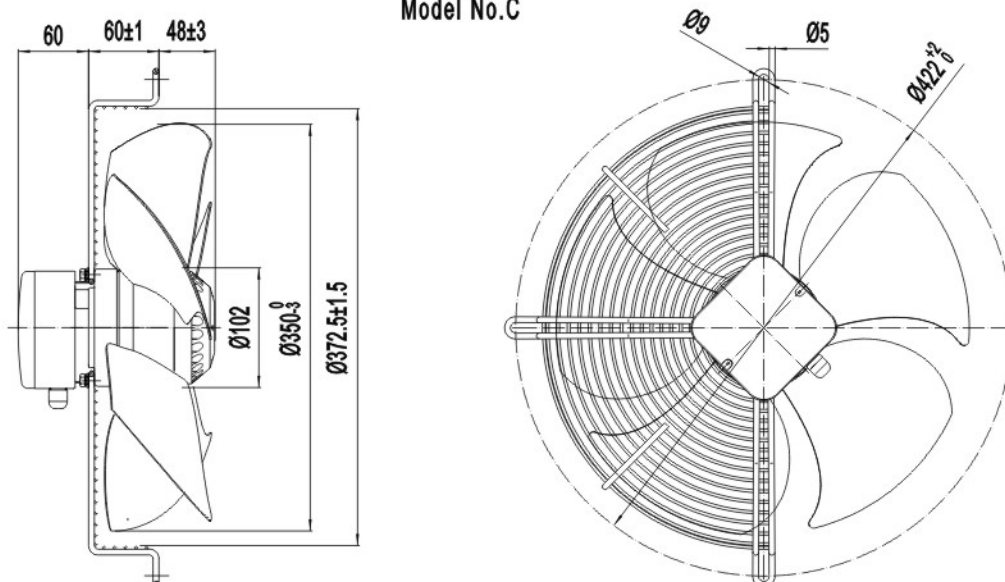


Model No.G

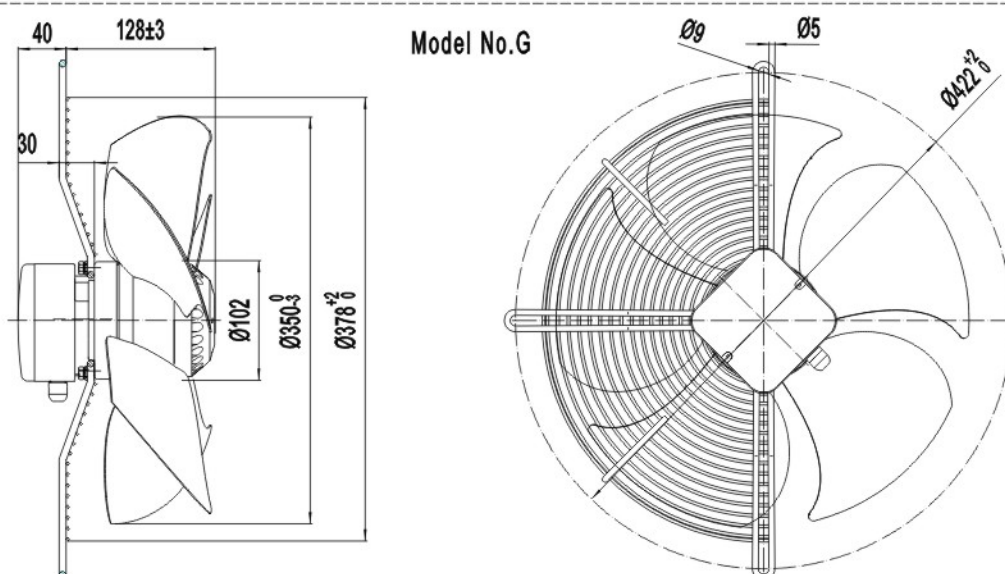

Model No.E

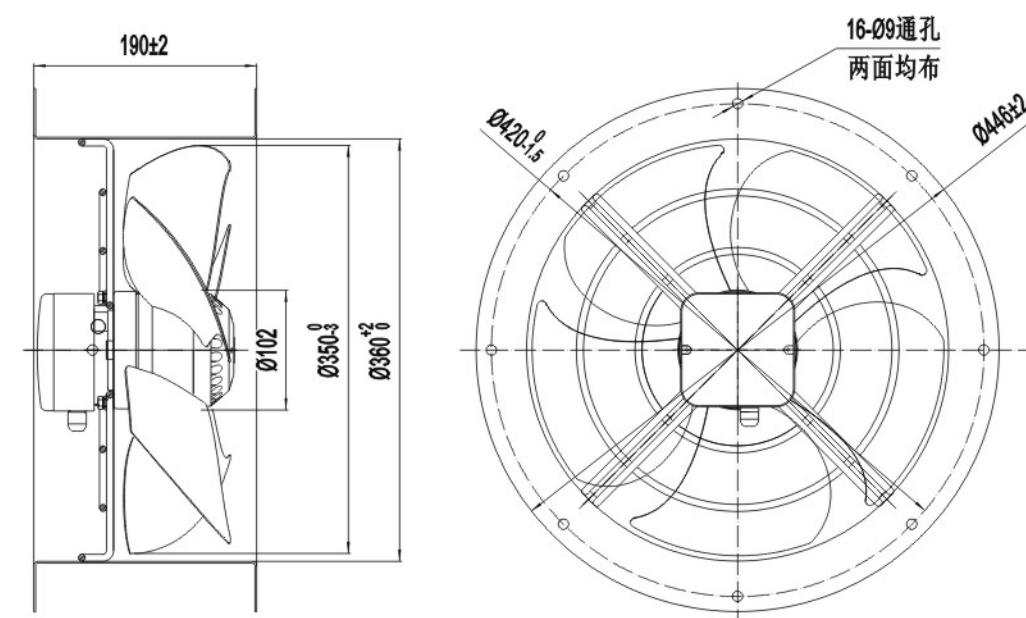

Model No.F0

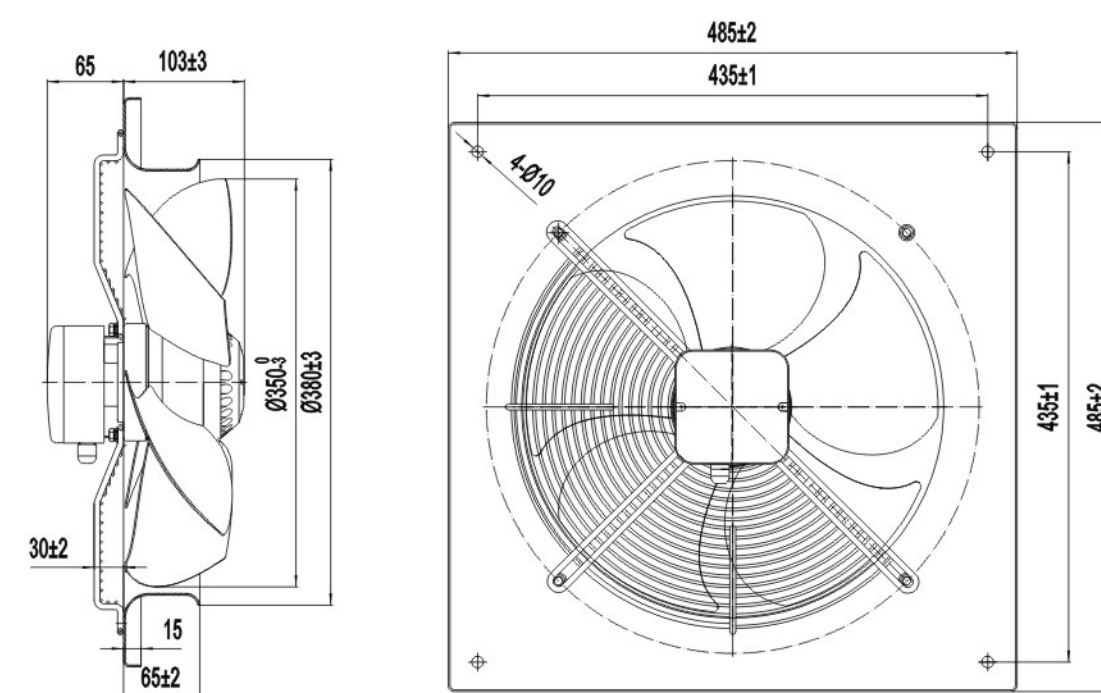



Φ350



Ø350-7 系列轴流风机
Ø350-7 Series Axial Fan



材 质: 转子铸铝
保护等级: IP54
绝缘等级: F
轴 承: 免维护滚珠球轴承

Material: Rotor: Aluminum Casting
Protection Class: IP54
Insulation Class: F
Bearings: Ball Bearings

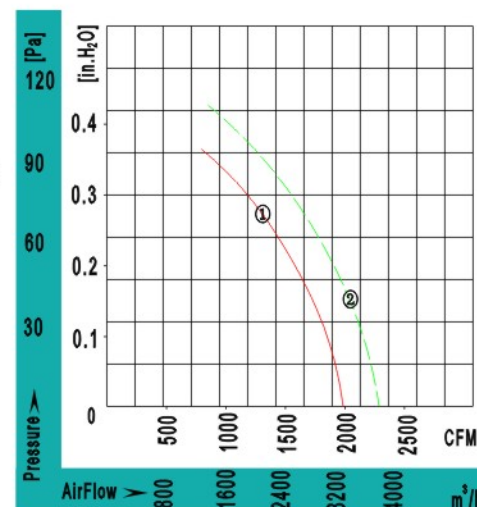

Model No.E	V	Hz	A	W	RPM	μ F	m³/h / CFM	dB (A)	Min / Max (°C)	#	Approvals
YWF.A4S-350S-7EIA01	220/230	50	0.77	170	1380	6	3350 / 1970	59	-30 / +60	①	CCC, CE, RoHS
		60	1.20	250	1550		3700 / 2176	61		②	CCC, CE, RoHS, UL
YWF.A4T-350S-7EIA01	380/400	50	0.48	170	1380	/	3350 / 1970	59	-30 / +60	①	CCC, CE, RoHS
		60	0.45	250	1550		3700 / 2176	61		②	CCC, CE, RoHS, UL

Model No.D

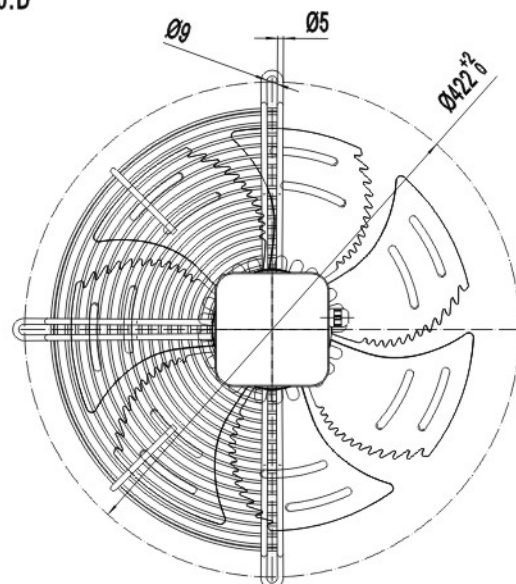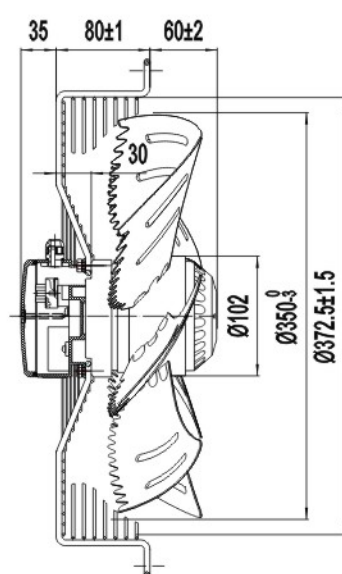


Φ380



Ø380-5 系列轴流风机
Ø380-5 Series Axial Fan



材 质: 转子铸铝
保护等级: IP54
绝缘等级: F
轴 承: 免维护滚珠球轴承

Material: Rotor: Aluminum Casting
Protection Class: IP54
Insulation Class: F
Bearings: Ball Bearings

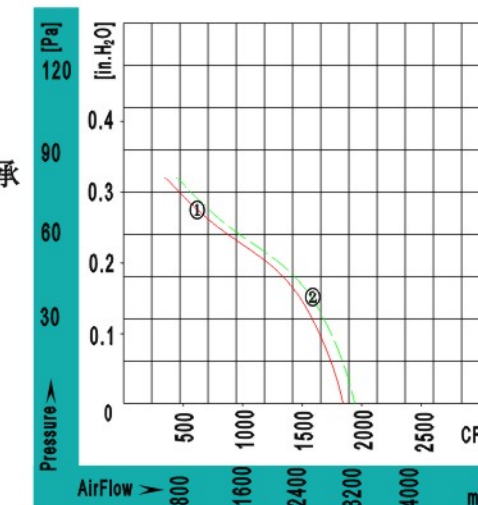

Model No.D	V	Hz	A	W	RPM	μ F	m³/h / CFM	dB (A)	Min / Max (°C)	#	Approvals
YWF.A4S-380S-5DIA00	220/230	50	0.64	150	1380	4	3100 / 1823	59	-30 / +60	①	CCC, CE, RoHS
		60	0.9	210	1500		3300 / 1941	61		②	CCC, CE, RoHS, UL
YWF.A4T-380S-5DIA00	380/400	50	0.30	140	1380	/	3100 / 1823	59	-30 / +60	①	CCC, CE, RoHS
		60	0.42	210	1500		3300 / 1941	61		②	CCC, CE, RoHS, UL

Model No.D

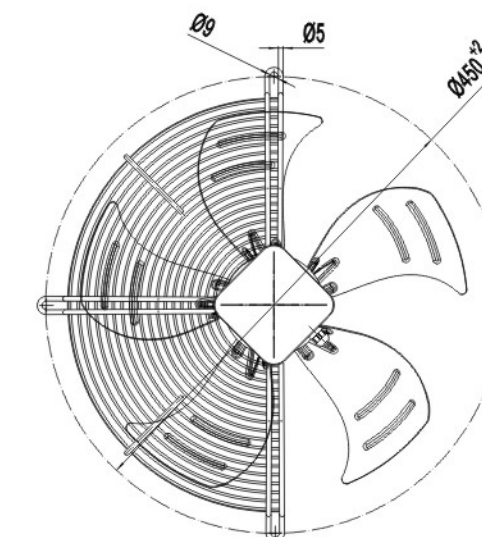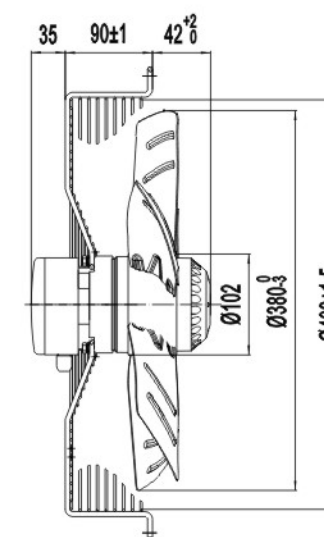



Φ400




Φ400




Ø400-5 系列轴流风机 Ø400-5 Series Axial Fan


材 质: 转子铸铝
Material: Rotor: Aluminum Casting
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings

					
Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
YWF.A4S-400S-5BIA00	YWF.A4S-400S-5CIA00	YWF.A4S-400S-5DIA00	YWF.A4S-400S-5GIA00	YWF.A4S-400S-5FIA00	
YWF.A4T-400S-5BIA00	YWF.A4T-400S-5CIA00	YWF.A4T-400S-5DIA00	YWF.A4T-400S-5GIA00	YWF.A4T-400S-5FIA00	
YWF.A6S-400S-5BIA00	YWF.A6S-400S-5CIA00	YWF.A6S-400S-5DIA00	YWF.A6S-400S-5GIA00	YWF.A6S-400S-5FIA00	
YWF.A6T-400S-5BIA00	YWF.A6T-400S-5CIA00	YWF.A6T-400S-5DIA00	YWF.A6T-400S-5GIA00	YWF.A6T-400S-5FIA00	
YWF.A4S-400S-5BIA05	YWF.A4S-400S-5CIA05	YWF.A4S-400S-5DIA05	YWF.A4S-400S-5GIA05	YWF.A4S-400S-5FIA05	
YWF.A6S-400S-5BIA05	YWF.A6S-400S-5CIA05	YWF.A6S-400S-5DIA05	YWF.A6S-400S-5GIA05	YWF.A6S-400S-5FIA05	

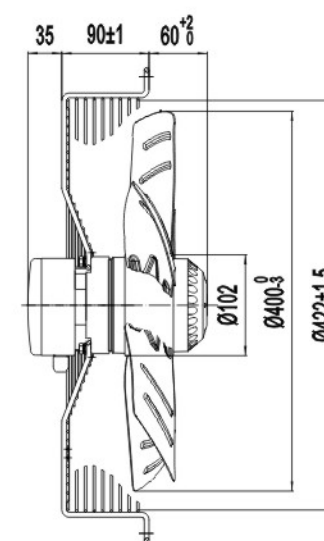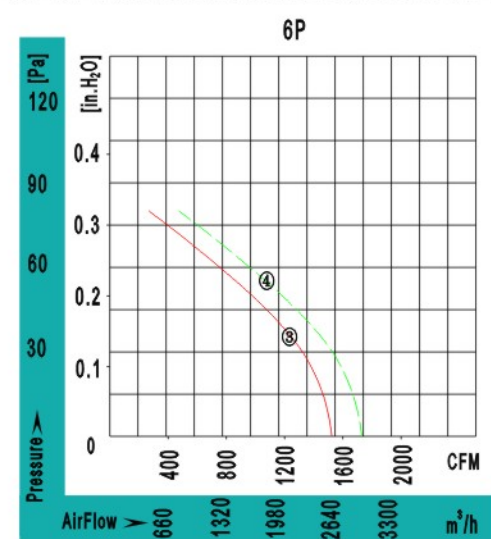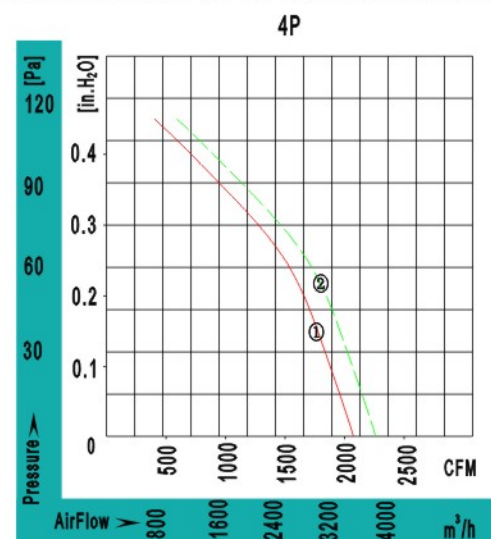


Model No.D

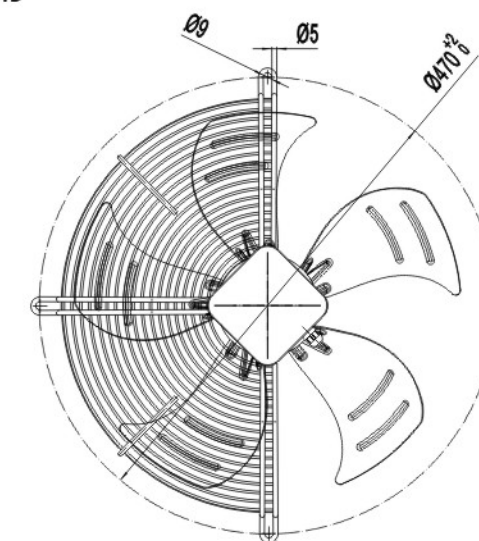



	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
Model No.E	V	Hz	A	W	RPM	μF	m³/h / CFM	dB (A)	Min / Max (°C)	#	
YWF.A4S-400S-5EIA00	220/230	50	0.90	190	1350	6	3500 / 2060	60	-30 / +60	①	CCC,CE,RoHS
		60	1.22	270	1580		3800 / 2235	62			
YWF.A4T-400S-5EIA00	380/400	50	0.50	190	1370	/	3500 / 2060	60	-30 / +60	①	CCC,CE,RoHS,UL
		60	0.47	245	1620		3800 / 2235	62			
YWF.A6S-400S-5EIA00	220/230	50	0.50	110	950	4	2600 / 1530	55	-30 / +60	③	CCC,CE,RoHS,UL
		60	0.54	120	1100		3000 / 1765	57			
YWF.A6T-400S-5EIA00	380/400	50	0.31	110	930	/	2600 / 1530	55	-30 / +60	④	CCC,CE,RoHS,UL
		60	0.30	135	1050		3000 / 1765	57			
YWF.A4S-400S-5EIA05	115/120	50	1.7	190	1350	24	3500 / 2060	60	-30 / +60	①	RoHS
		60	2.2	260	1500		3800 / 2235	62			
YWF.A6S-400S-5EIA05	115/120	50	0.8	80	920	12	2600 / 1530	55	-30 / +60	③	RoHS
		60	1.1	110	1000		3000 / 1765	57			

Φ400



Φ400

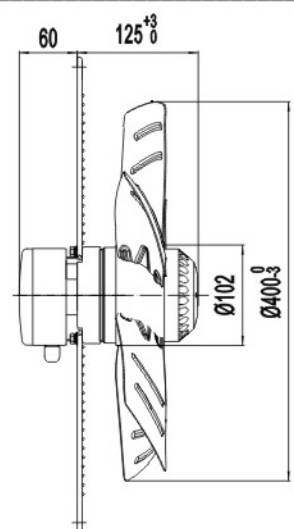



Model No.B

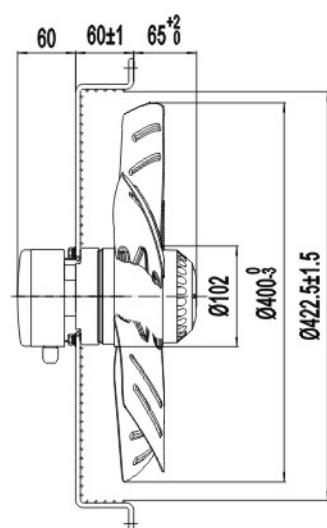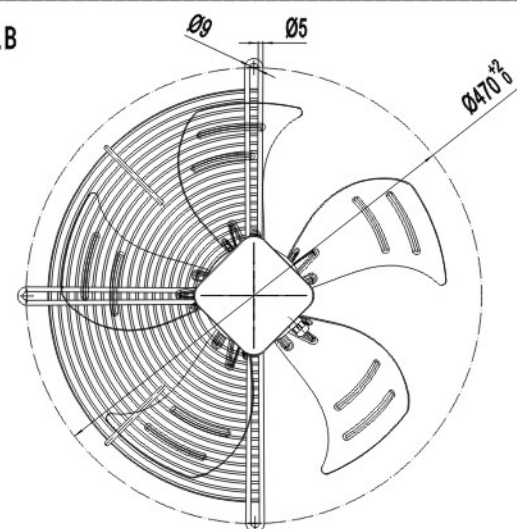



Model No.C

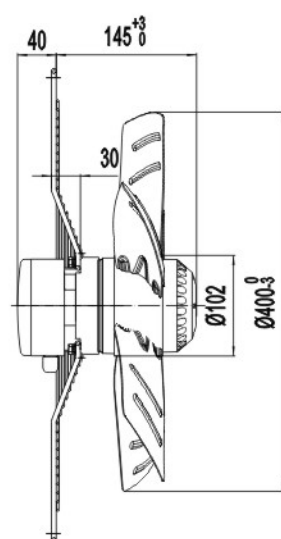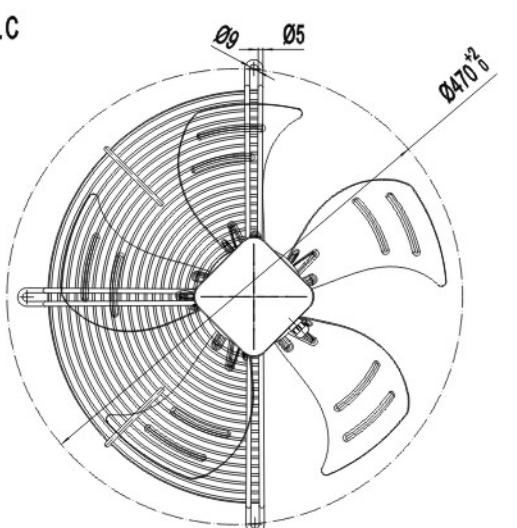


Model No.G

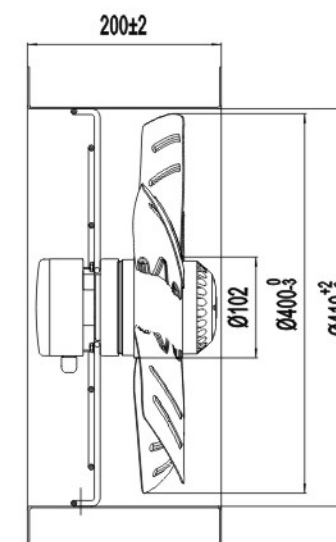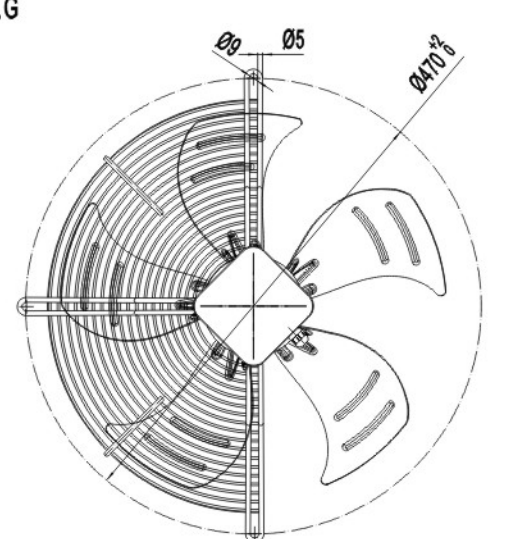

Model No.E

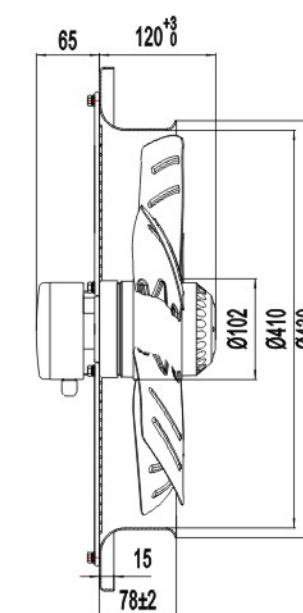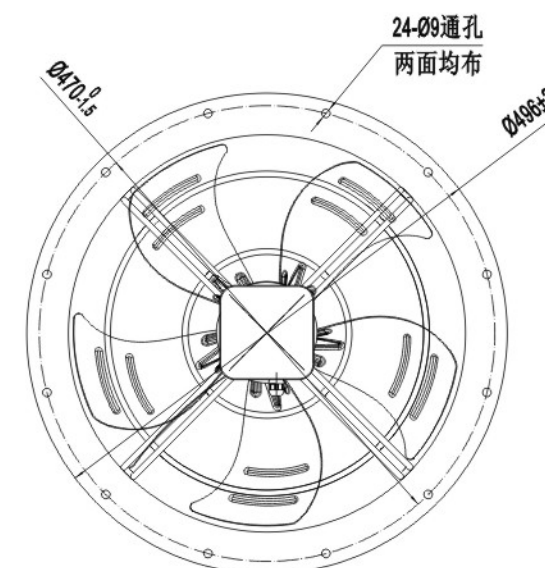

Model No.F0

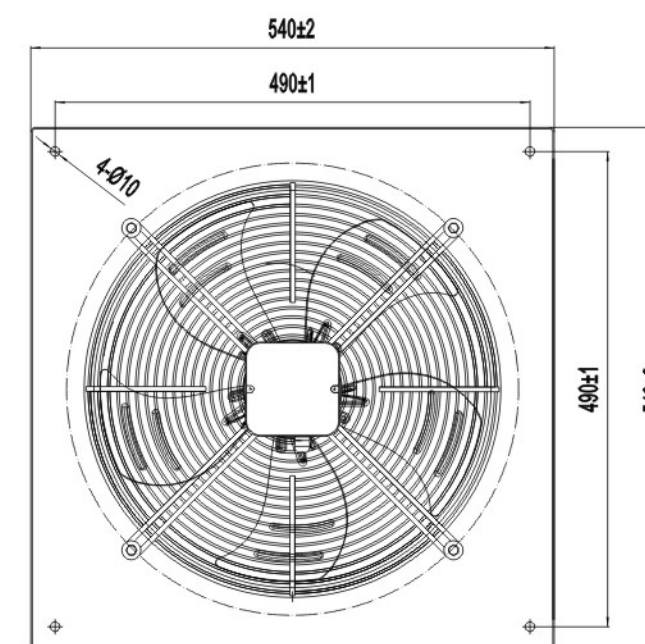


Φ400



Ø400-7 系列轴流风机
Ø400-7 Series Axial Fan


材 质: 转子铸铝
保护等级: IP54
绝缘等级: F
轴 承: 免维护滚珠球轴承

Material: Rotor: Aluminum Casting
Protection Class: IP54
Insulation Class: F
Bearings: Ball Bearings

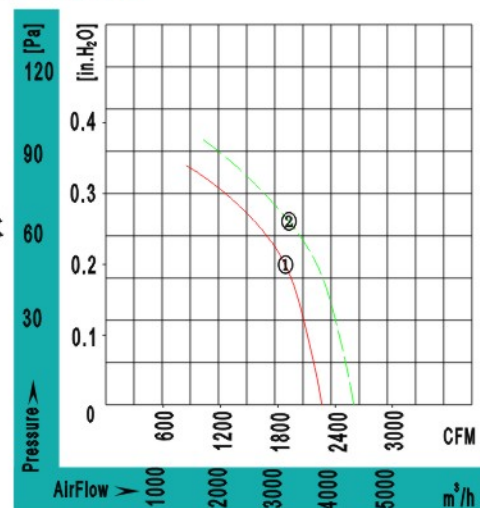

Model No.E	V	Hz	A	W	RPM	μF	m³/h / CFM	dB (A)	Min / Max (°C)	#
YWF.A4S-400S-7EIA00	220/230	50	1.07	230	1350	7	3800 / 2235	62	-30 / +60	① CCC,CE,RoHS
		60	1.65	360	1550		4400 / 2588	64		② CCC,CE,RoHS
YWF.A4T-400S-7EIA00	380/400	50	0.65	230	1350	/	3800 / 2235	62	-30 / +60	① CCC,CE,RoHS
		60	0.60	336	1550		4400 / 2588	64		② CCC,CE,RoHS

Model No.D

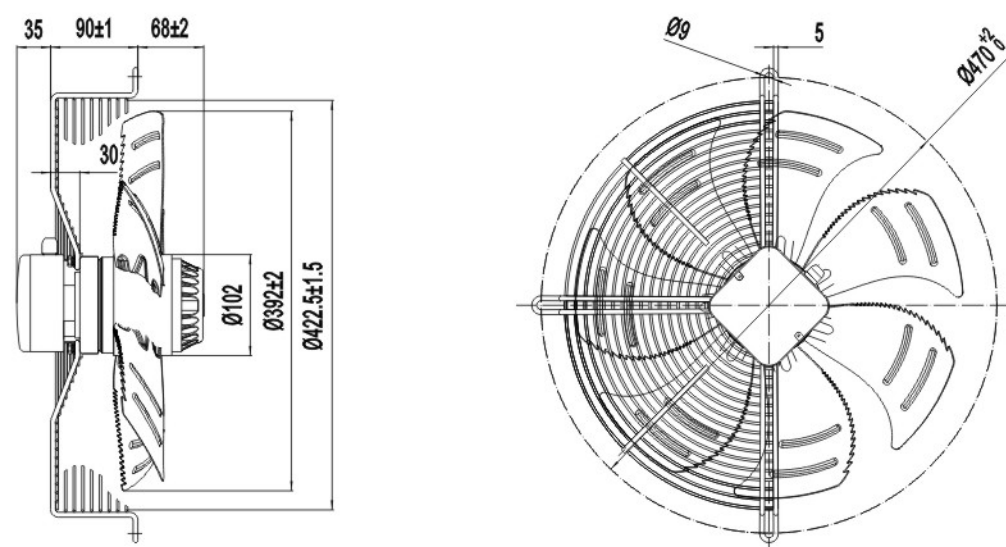


Φ420



Ø420-5 102系列轴流风机
Ø420-5 102Series Axial Fan


材 质: 转子铸铝
保护等级: IP54
绝缘等级: F
轴 承: 免维护滚珠球轴承

Material: Rotor: Aluminum Casting
Protection Class: IP54
Insulation Class: F
Bearings: Ball Bearings

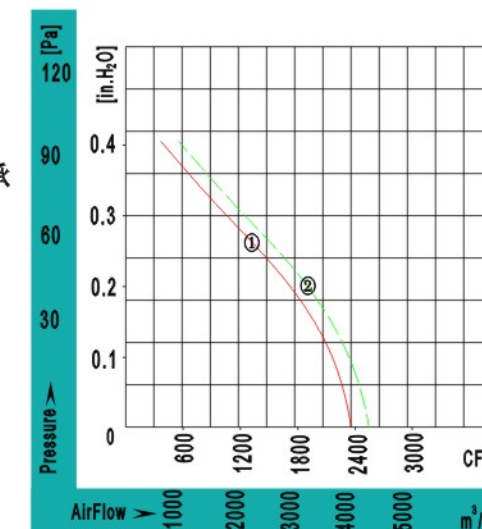

Model No.D	V	Hz	A	W	RPM	μF	m³/h / CFM	dB (A)	Min / Max (°C)	#
YWF.A4S-420S-5DIA00	220/230	50	1.10	220	1350	6	4020 / 2365	61	-30 / +60	① CCC,CE,RoHS
		60	1.3	300	1500		4300 / 2530	63		② CCC,CE,RoHS,UL
YWF.A4T-420S-5DIA00	380/400	50	0.54	215	1350	/	4020 / 2365	61	-30 / +60	① CCC,CE,RoHS
		60	0.79	290	1500		4300 / 2530	63		② CCC,CE,RoHS,UL

Model No.D

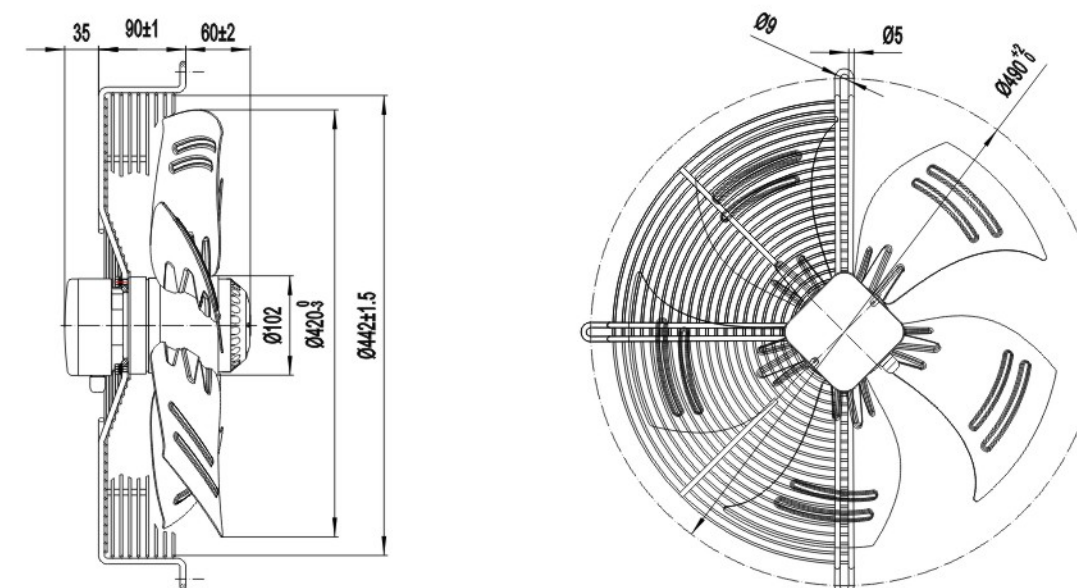


Φ420



Ø420-5 137系列轴流风机
Ø420-5 137Series Axial Fan



材 质: 转子铸铝
保护等级: IP54
绝缘等级: F
轴 承: 免维护滚珠球轴承
符合能效: ErP2015

Material: Rotor: Aluminum Casting
Protection Class: IP54
Insulation Class: F
Bearings: Ball Bearings

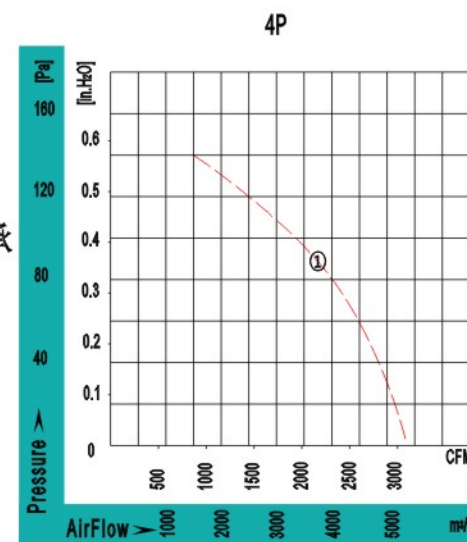

Model No.D

	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
	V	Hz	A	W	RPM	μ F	m³/h / CFM	dB (A)	Min / Max (°C)	#	
YWF.A4S-420S-5DIAR0	220/230	50	1.50	330	1350	10	5300/3124	65	-30 / +60	①	CCC,CE,RoHS
YWF.A4T-420S-5DIAR0	380/400	50	0.85	330	1350	/	5300/3124	65	-30 / +60	①	CCC,CE,RoHS

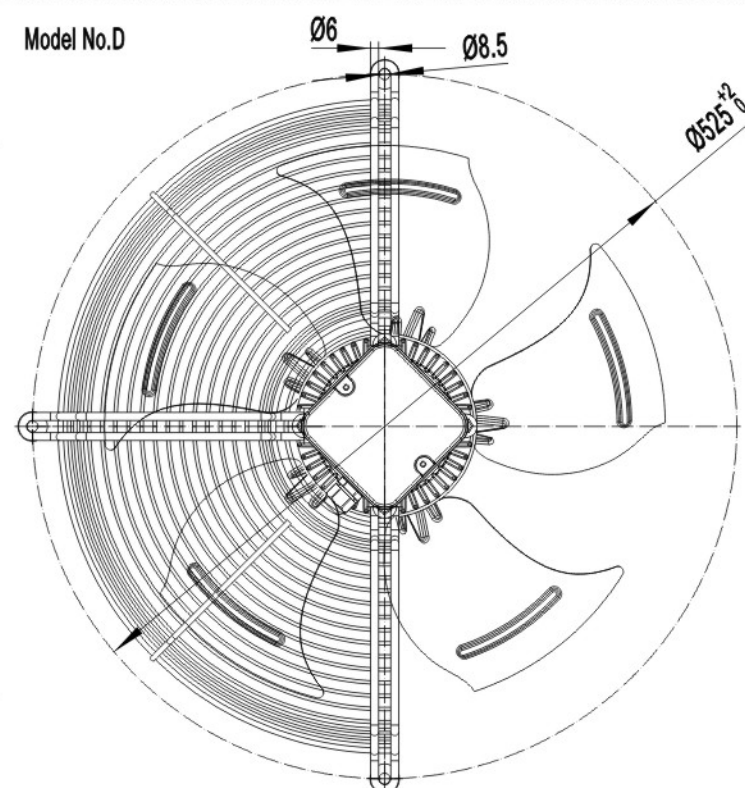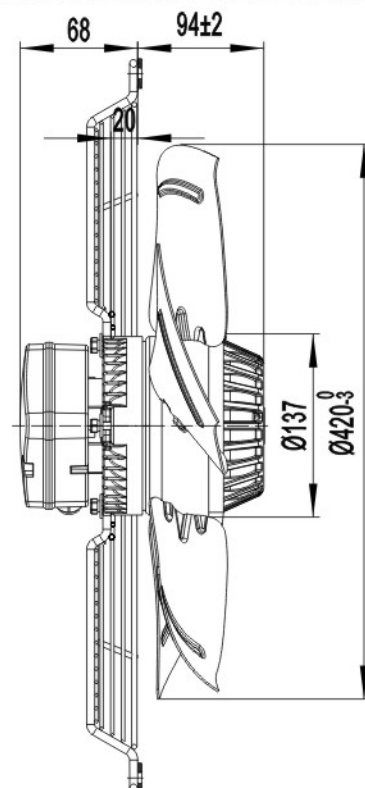


Φ315



Ø315-5 系列轴流风机
Ø315-5 Series Axial Fan


材 质: 转子铸铝
保护等级: IP44
绝缘等级: F
轴 承: 免维护滚珠球轴承

Material: Rotor: Aluminum Casting
Protection Class: IP44
Insulation Class: F
Bearings: Ball Bearings

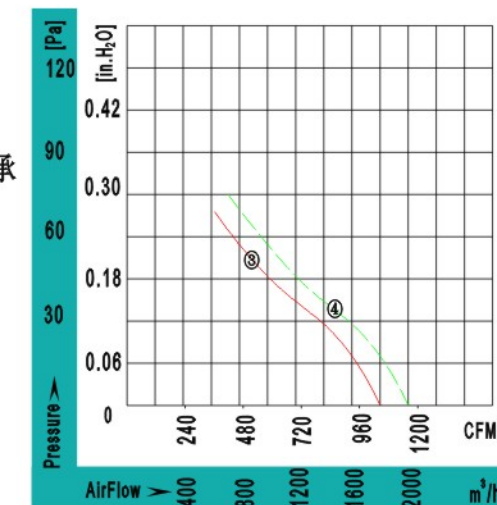


Model No.D

	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
	V	Hz	A	W	RPM	μ F	m³/h / CFM	dB (A)	Min / Max (°C)	#	
YWF.A4S-315S-5DIA00	220/230	50	0.42	90	1350	4	1800 / 1060	56	-30 / +60	①	CCC,CE,RoHS
		60	0.55	120	1550		2000 / 1176	58		②	CCC,CE,RoHS,UL
YWF.A4T-315S-5DIA00	380/400	50	0.25	90	1350	/	1800 / 1060	56	-30 / +60	①	CCC,CE,RoHS
		60	0.26	120	1500		2000 / 1176	58		②	CCC,CE,RoHS,UL

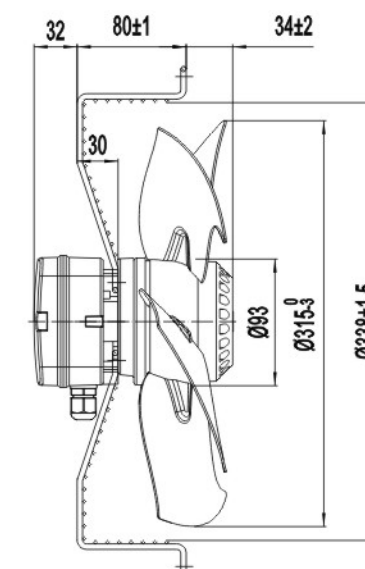

Model No.D

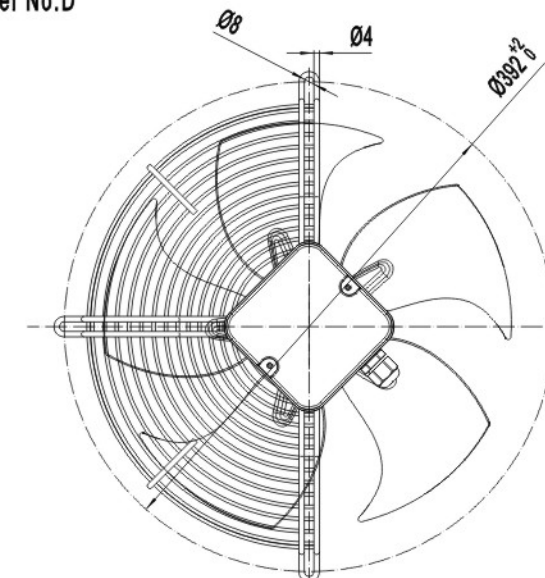

Φ450




Φ450




Ø450-5 102系列轴流风机
Ø450-5 102Series Axial Fan

材 质: 转子铸铝
Material: Rotor: Aluminum Casting
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠轴承
Bearings: Ball Bearings

Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
YWF.A4S-450S-5BIA00	YWF.A4S-450S-5CIA00	YWF.A4S-450S-5DIA00	YWF.A4S-450S-5GIA00	YWF.A4S-450S-5FIA00	YWF.A4S-450S-5FIA01
YWF.A4T-450S-5BIA00	YWF.A4T-450S-5CIA00	YWF.A4T-450S-5DIA00	YWF.A4T-450S-5GIA00	YWF.A4T-450S-5FIA00	YWF.A4T-450S-5FIA01
YWF.A6S-450S-5BIA00	YWF.A6S-450S-5CIA00	YWF.A6S-450S-5DIA00	YWF.A6S-450S-5GIA00	YWF.A6S-450S-5FIA00	YWF.A6S-450S-5FIA01
YWF.A6T-450S-5BIA00	YWF.A6T-450S-5CIA00	YWF.A6T-450S-5DIA00	YWF.A6T-450S-5GIA00	YWF.A6T-450S-5FIA00	YWF.A6T-450S-5FIA01
YWF.A4S-450S-5BIA05	YWF.A4S-450S-5CIA05	YWF.A4S-450S-5DIA05	YWF.A4S-450S-5GIA05	YWF.A4S-450S-5FIA05	YWF.A4S-450S-5FIA15

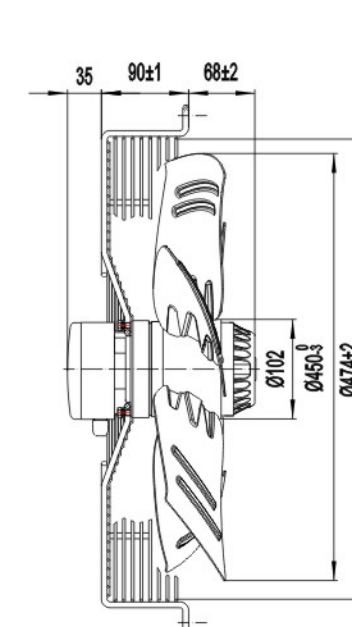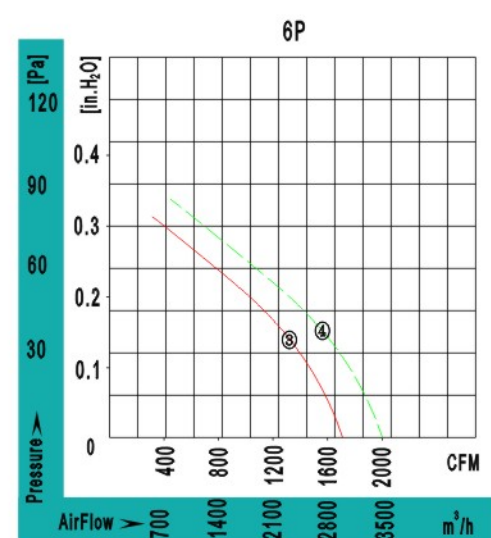
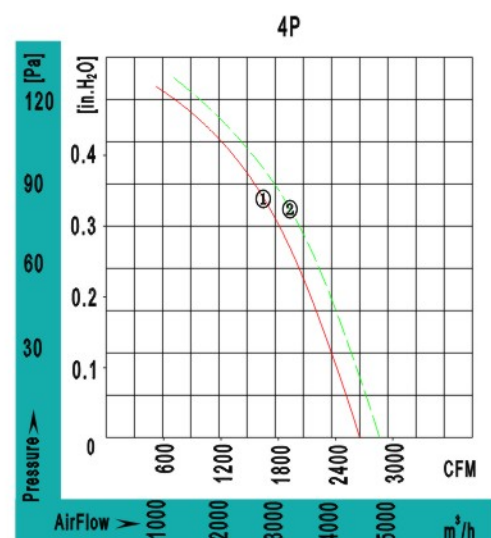


Model No.D

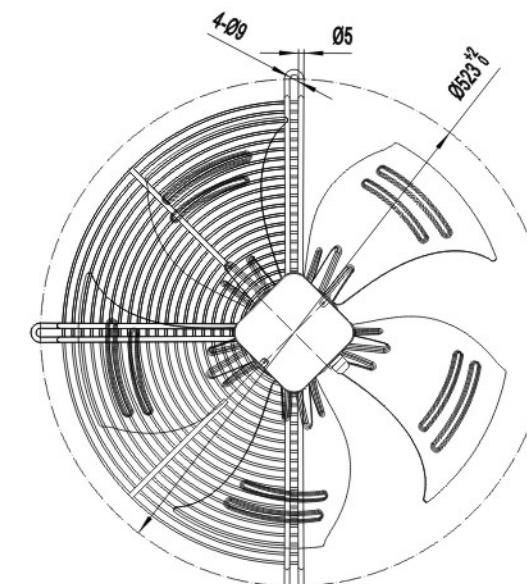


	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
Model No.E	V	Hz	A	W	RPM	μ F	m³/h / CFM	dB (A)	Min / Max (°C)	#	
YWF.A4S-450S-5EIA00	220/230	50	1.15	250	1350	7	4500 / 2650	62	-30 / +60	①	CCC, CE, RoHS
		60	1.50	350	1800		4800 / 2825	64		②	CCC, CE, RoHS, UL
YWF.A4T-450S-5EIA00	380/400	50	0.55	250	1380	/	4500 / 2650	62	-30 / +60	①	CCC, CE, RoHS
		60	0.67	350	1810		4800 / 2825	64		②	CCC, CE, RoHS, UL
YWF.A6S-450S-5EIA00	220/230	50	0.65	135	920	6	2900 / 1705	56	-30 / +60	③	CCC, CE, RoHS
		60	0.79	175	1100		3400 / 2000	58		④	CCC, CE, RoHS, UL
YWF.A6T-450S-5EIA00	380/400	50	0.33	120	910	/	2900 / 1705	56	-30 / +60	③	CCC, CE, RoHS
		60	0.34	145	1030		3400 / 2000	58		④	CCC, CE, RoHS, UL
YWF.A4S-450S-5EIA05	115/120	60	2.2	240	1350	22	4500 / 2650	62	-30 / +60	①	RoHS
		50	2.9	330	1500		4800 / 2825	64		②	RoHS, UL

Model No.F1

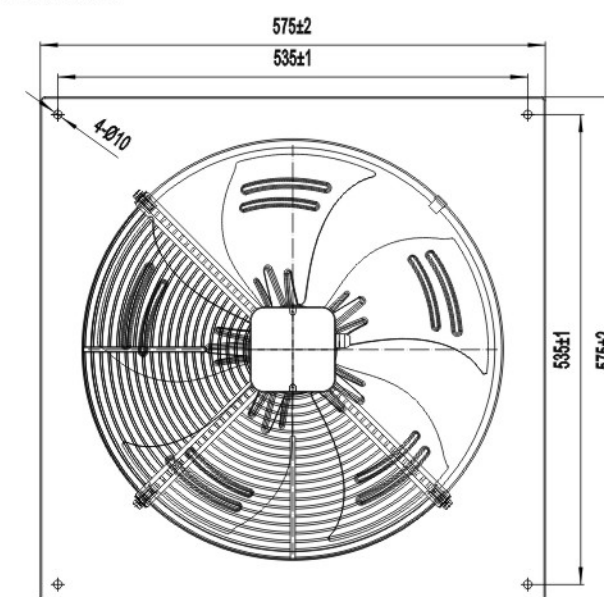
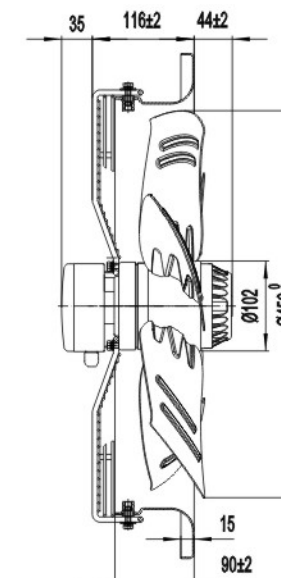


Φ450



Φ450

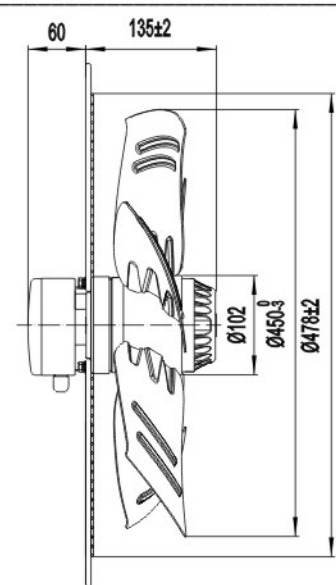


Model No.B

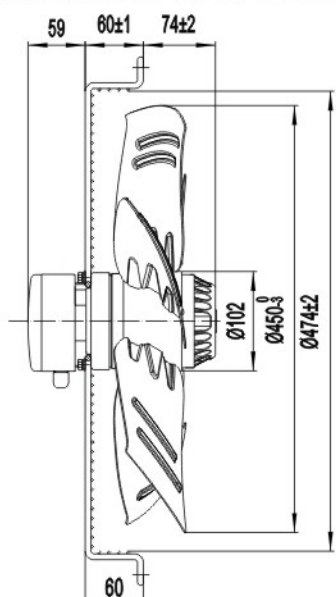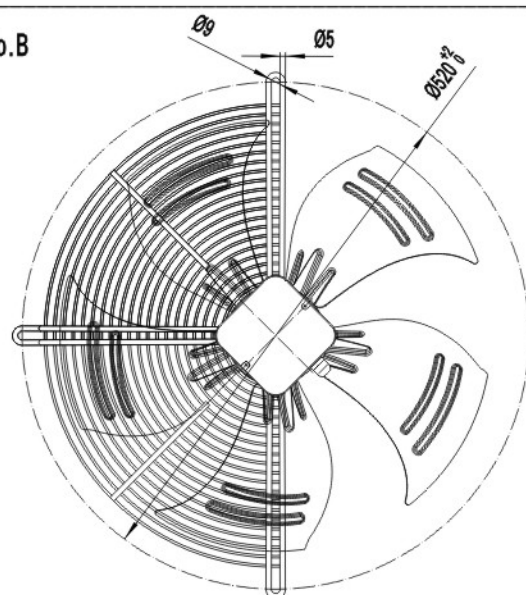



Model No.C

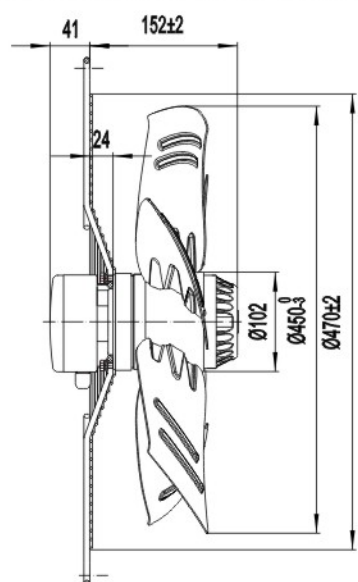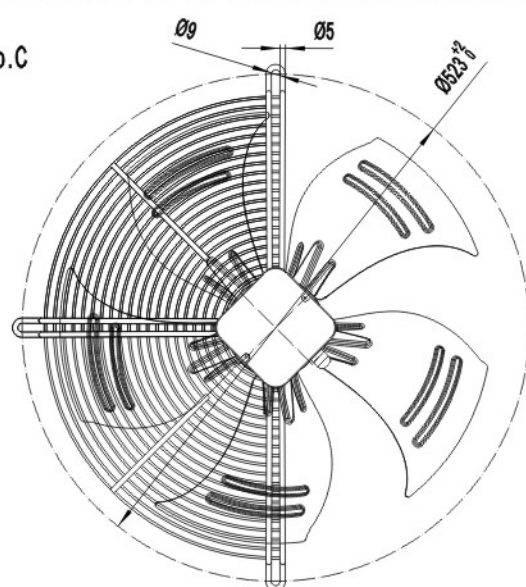



Model No.G

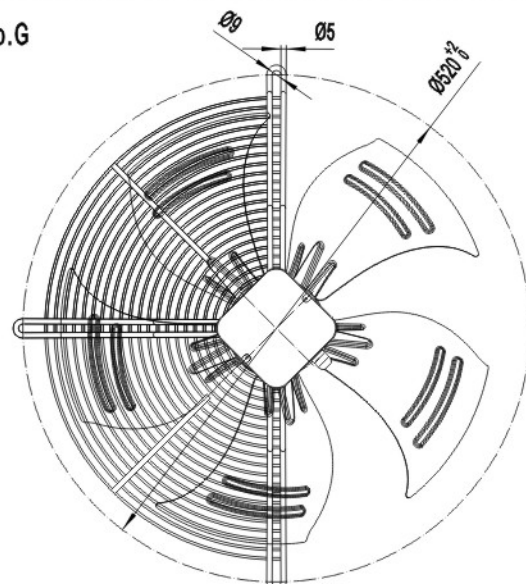

Model No.E

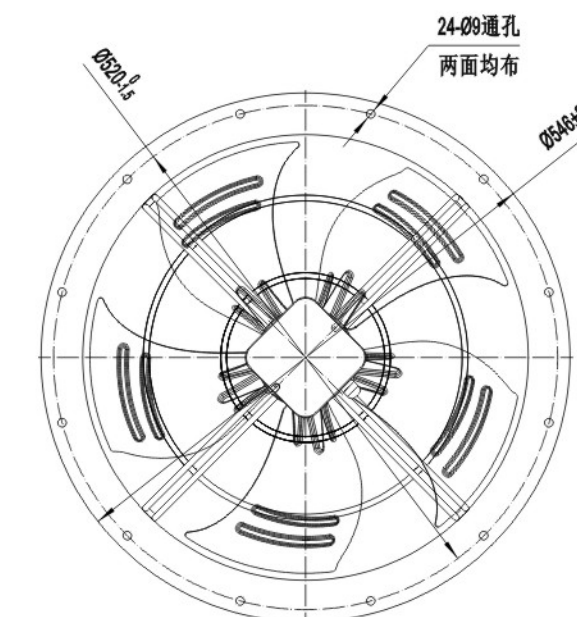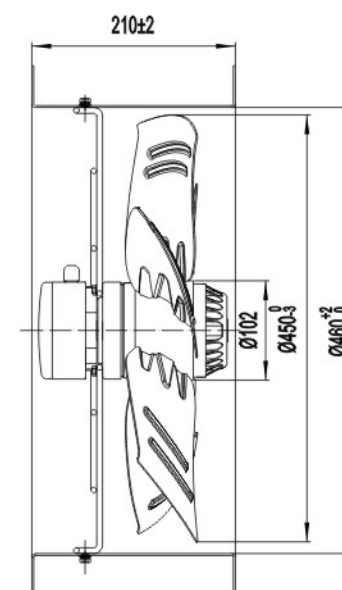

Model No.F0

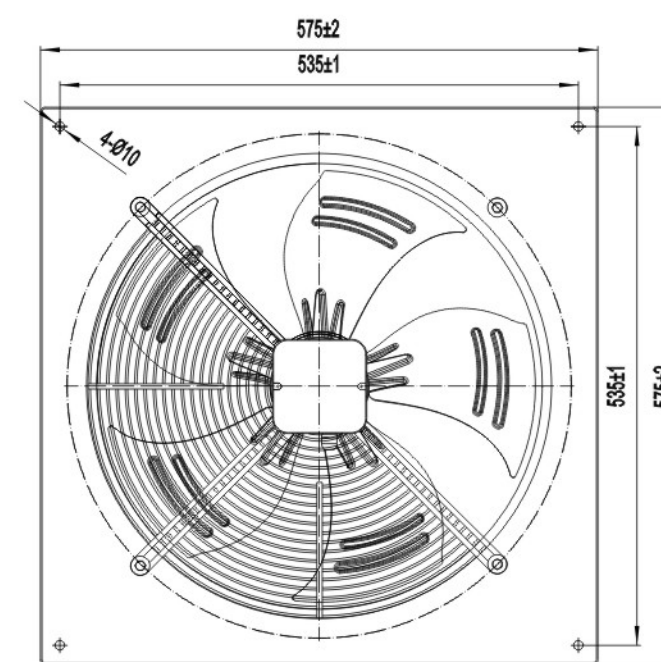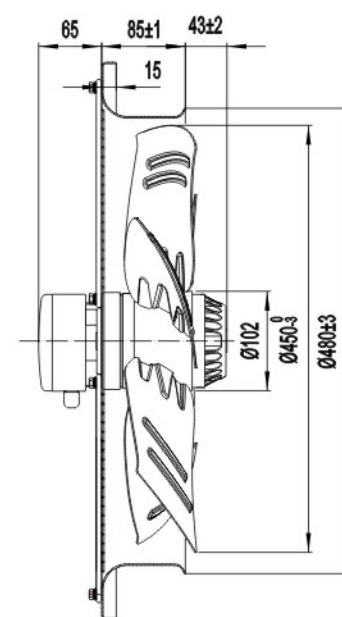

Φ450




Ø450-5 137系列轴流风机
Ø450-5 137Series Axial Fan

材 质: 转子铸铝
Material: Rotor: Aluminum Casting
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings
符合能效: ErP2015




D型网罩

Model No.D	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
	V	Hz	A	W	RPM	μ F	m³/h/ CFM	dB (A)	Min / Max (°C)	#	
YWF.A4S-450S-5DIAS0	220/230	50	1.90	430	1350	16	6800/4012	65	-30 / +60	①	CCC,CE,RoHs
YWF.A4T-450S-5DIAS0	380/400	50	1.00	430	1350	/	6800/4012	65	-30 / +60	①	CCC,CE,RoHs
YWF.A4S-450S-5DIAR0	220/230	50	1.80	400	1350	10	5500/3245	60	-30 / +60	②	CCC,CE,RoHs

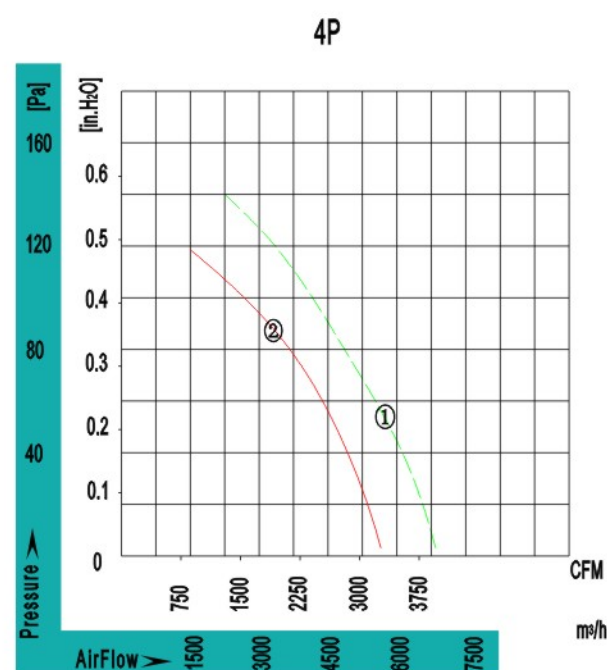

Φ450

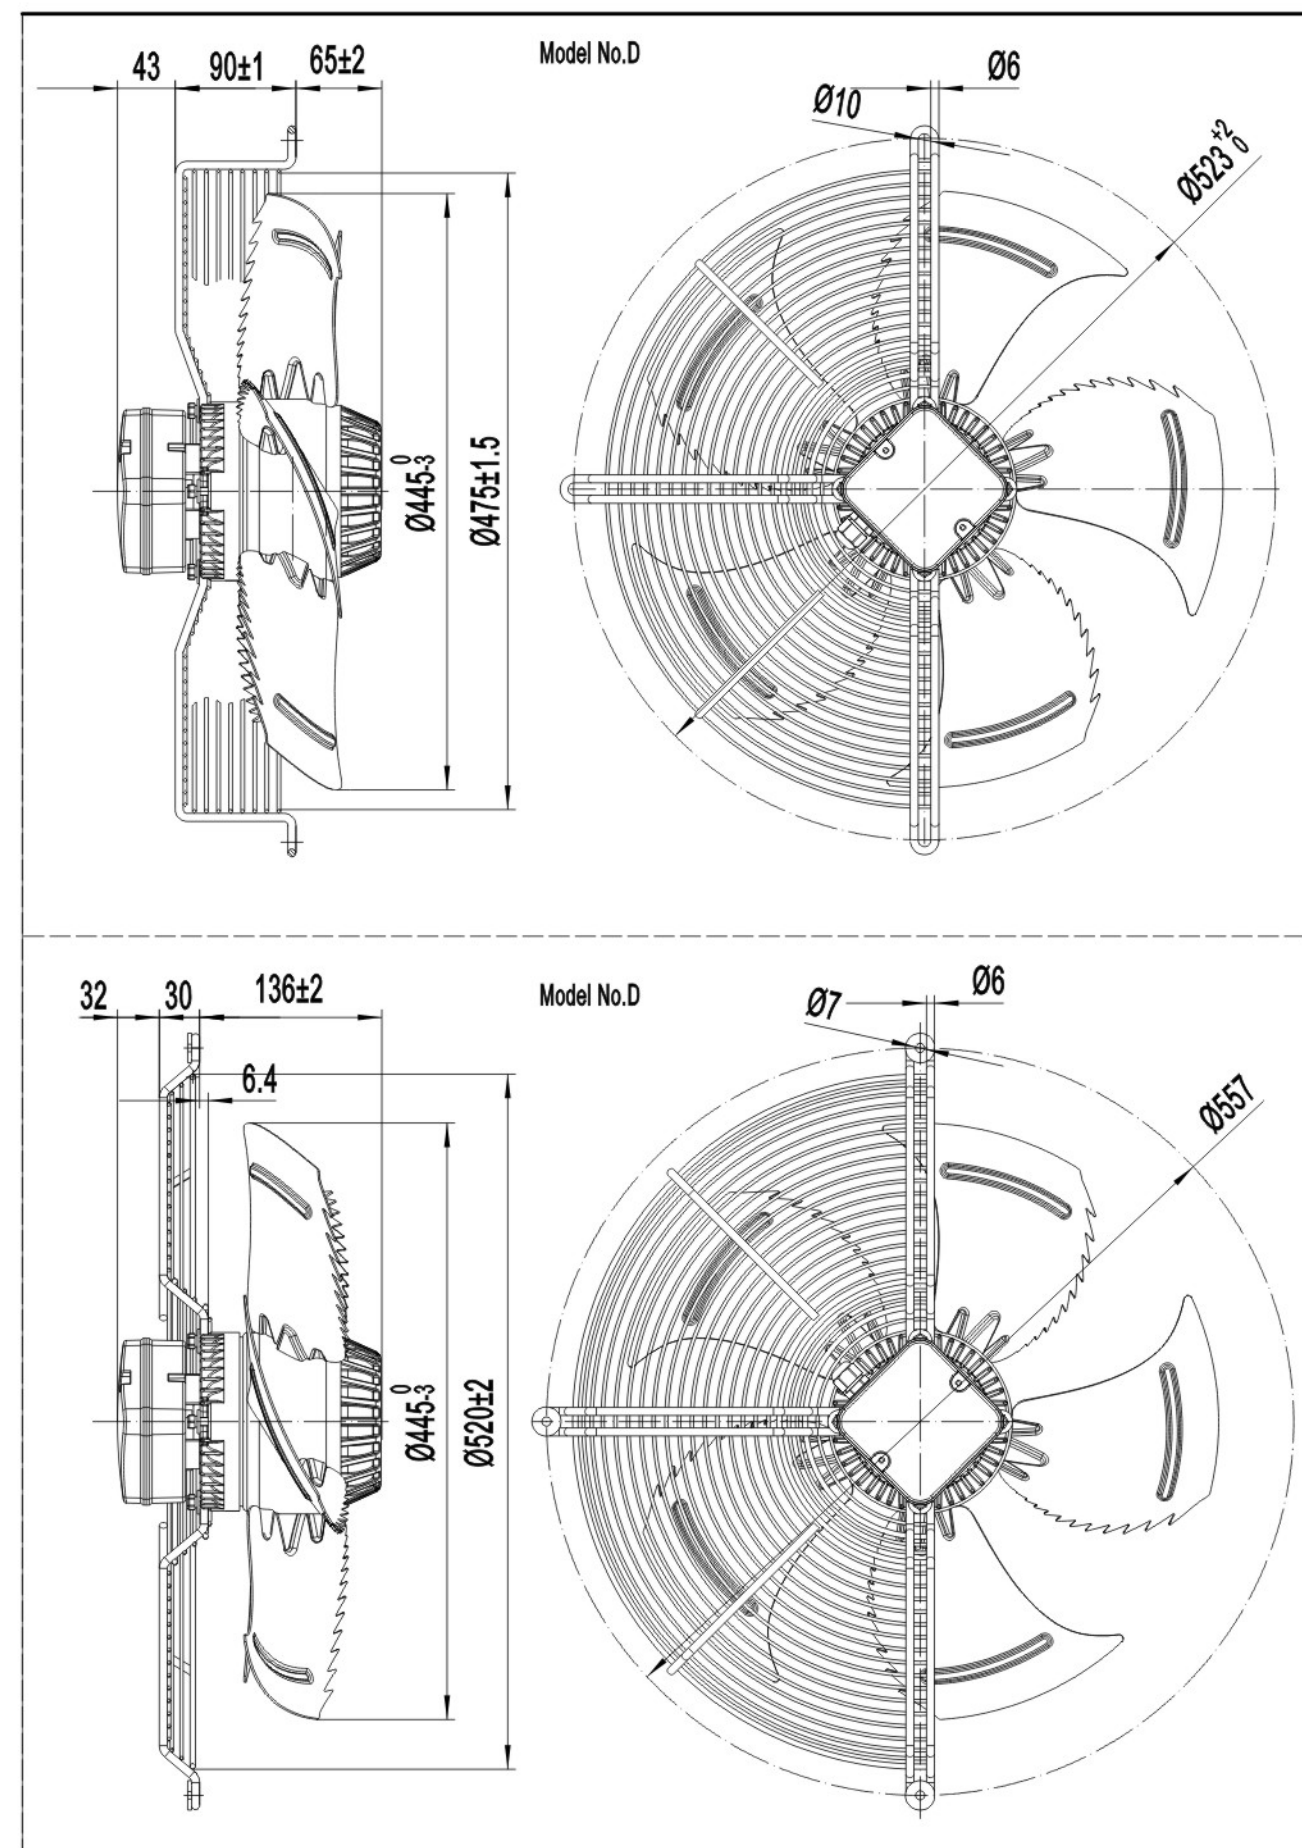

Φ500

Φ500



Ø500-5 系列轴流风机
Ø500-5 Series Axial Fan




材 质: 转子铸铝
Material: Rotor: Aluminum Casting

保护等级: IP54
Protection Class: IP54

绝缘等级: F
Insulation Class: F


轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings

B型网罩	C型网罩	D型网罩	G型网罩	F型正扣面板	F型反扣面板
Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
YWF.A4S-500S-5BIA00	YWF.A4S-500S-5CIA00	YWF.A4S-500S-5DIA00	YWF.A4S-500S-5GIA00	YWF.A4S-500S-5FIA00	YWF.A4S-500S-5FIA01
YWF.A4T-500S-5BIA00	YWF.A4T-500S-5CIA00	YWF.A4T-500S-5DIA00	YWF.A4T-500S-5GIA00	YWF.A4T-500S-5FIA00	YWF.A4T-500S-5FIA01
YWF.A6S-500S-5BIA00	YWF.A6S-500S-5CIA00	YWF.A6S-500S-5DIA00	YWF.A6S-500S-5GIA00	YWF.A6S-500S-5FIA00	YWF.A6S-500S-5FIA01
YWF.A6T-500S-5BIA00	YWF.A6T-500S-5CIA00	YWF.A6T-500S-5DIA00	YWF.A6T-500S-5GIA00	YWF.A6T-500S-5FIA00	YWF.A6T-500S-5FIA01
YWF.A8T-500S-5BIA00	YWF.A8T-500S-5CIA00	YWF.A8T-500S-5DIA00	YWF.A8T-500S-5GIA00	YWF.A8T-500S-5FIA00	YWF.A8T-500S-5FIA01

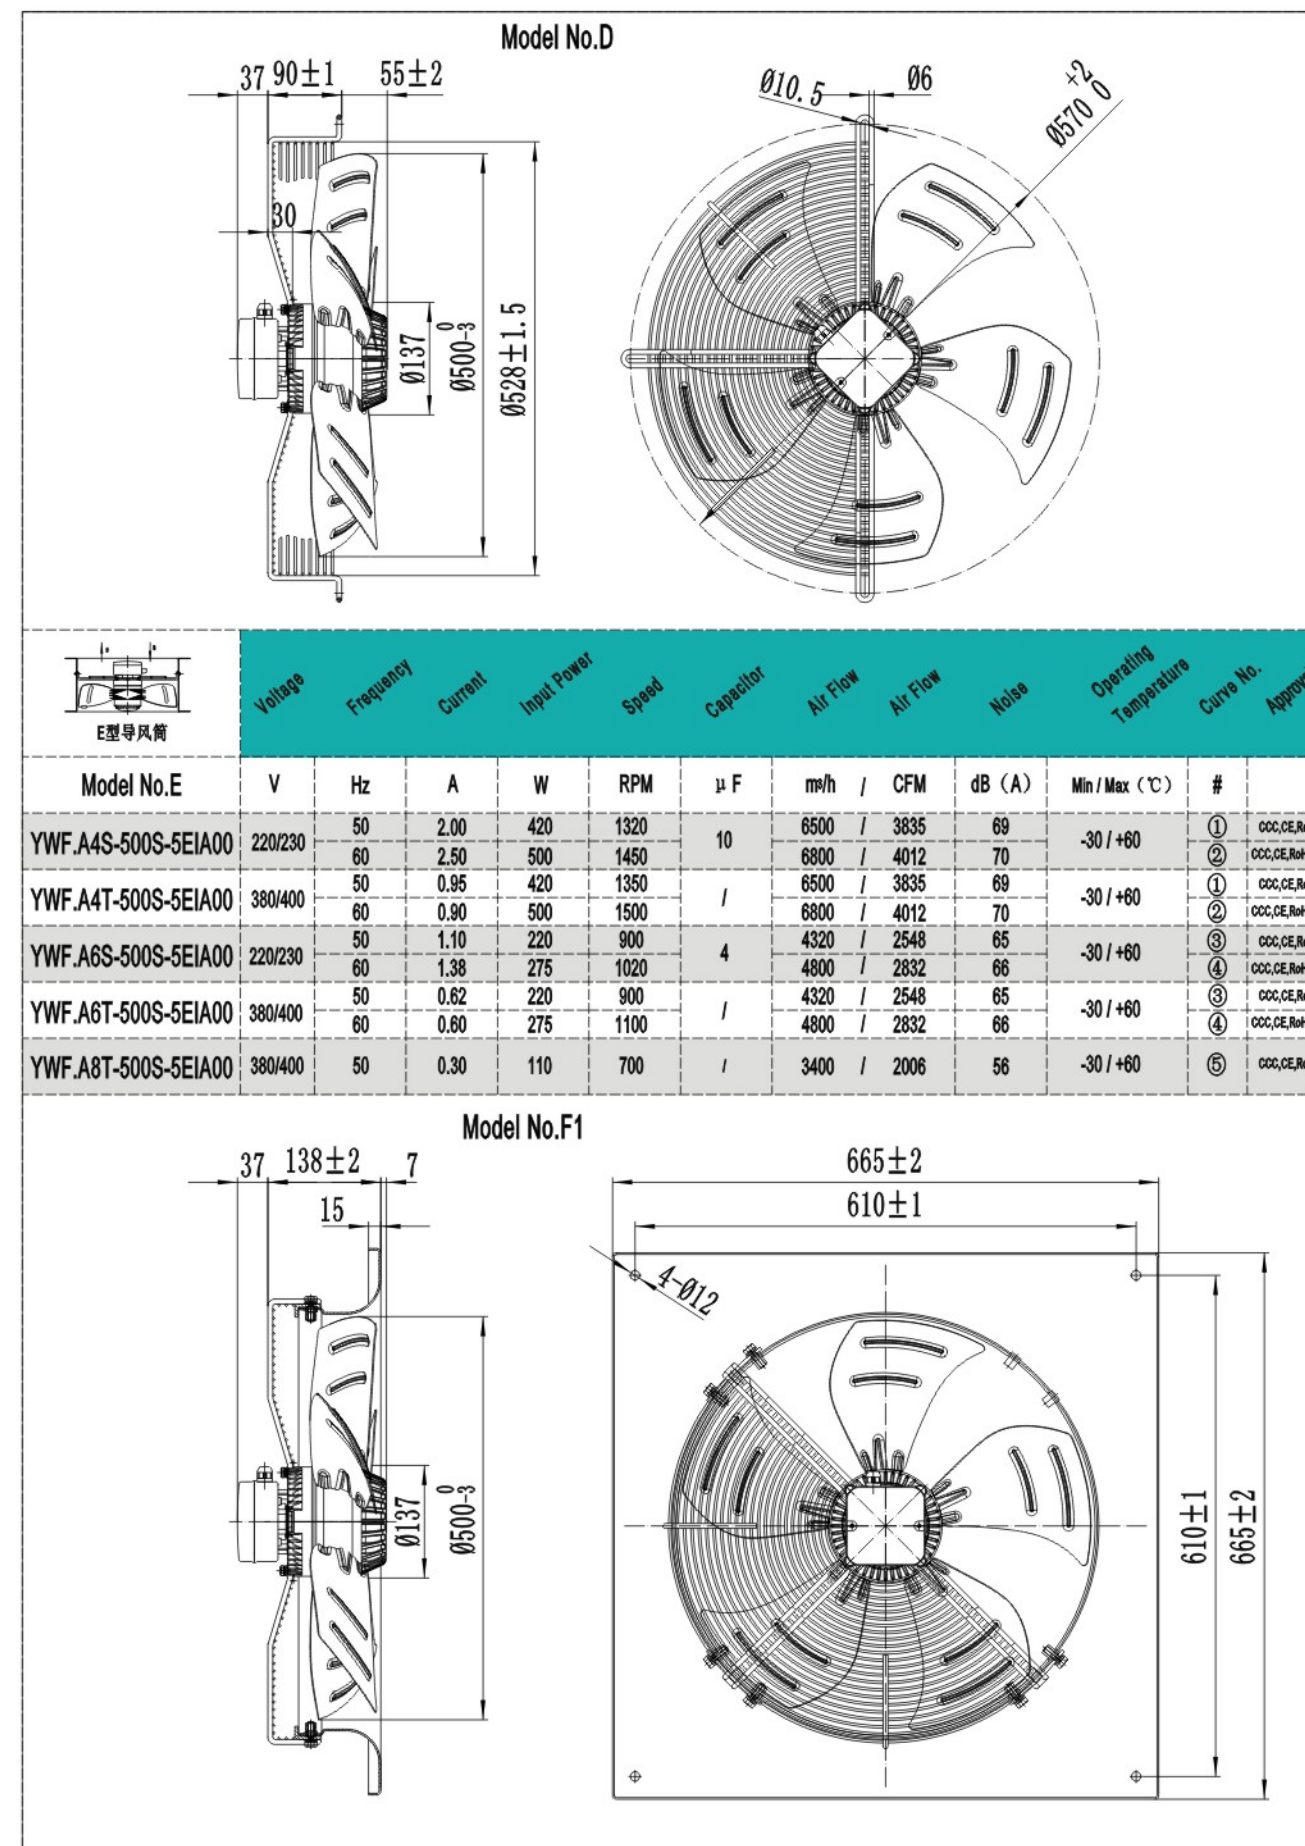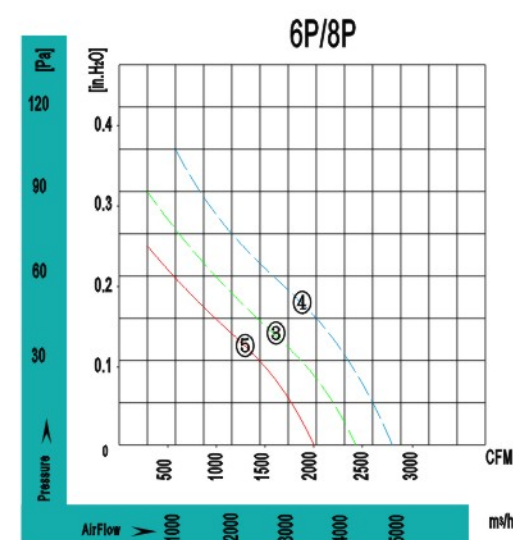
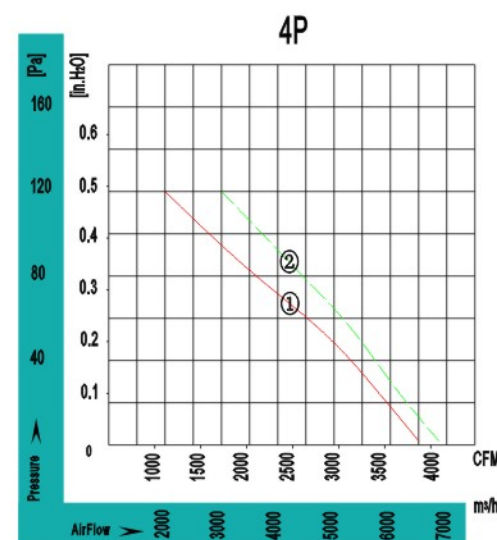


Φ500



Φ500

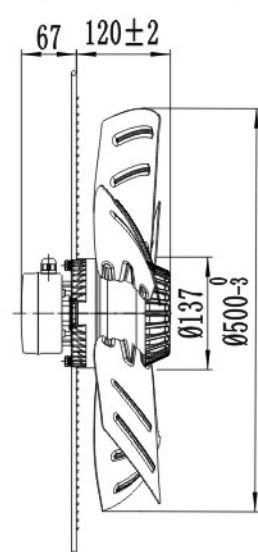


Model No.B

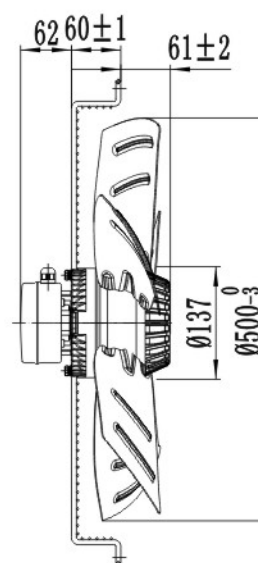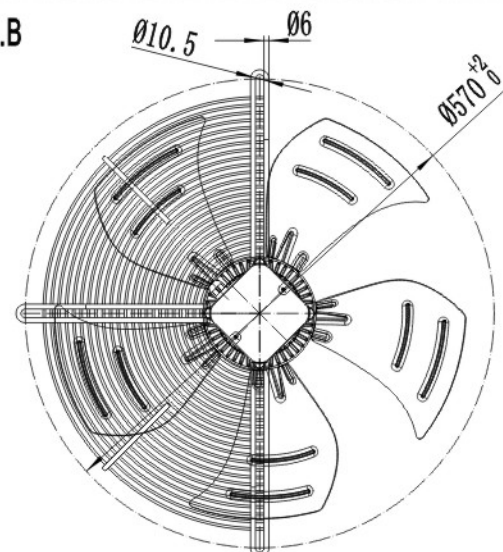



Model No.C

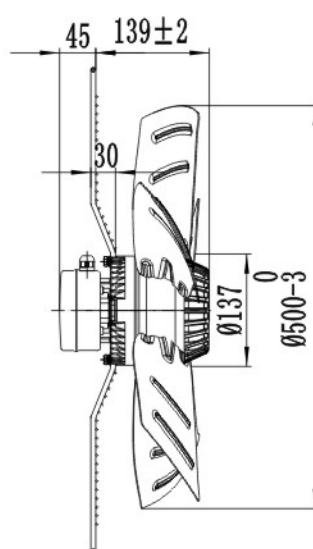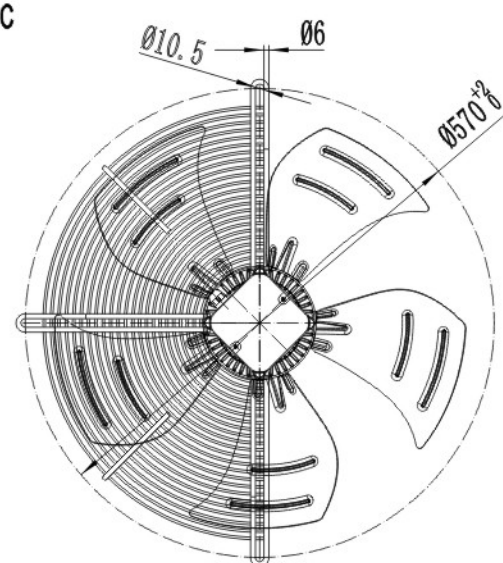



Model No.G

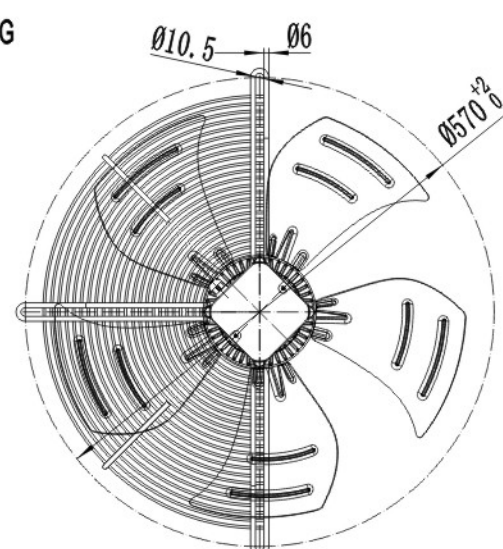

Model No.E

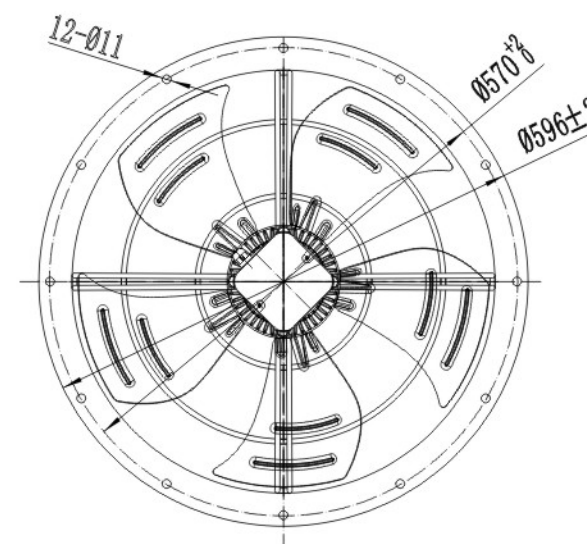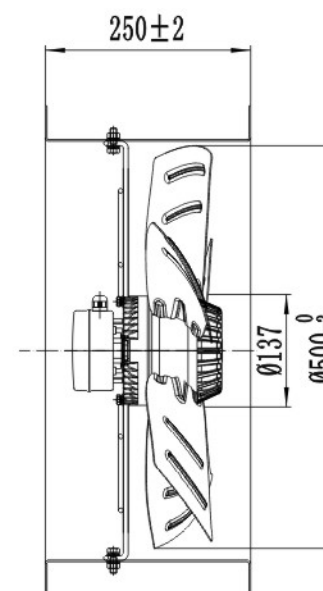

Model No.F0

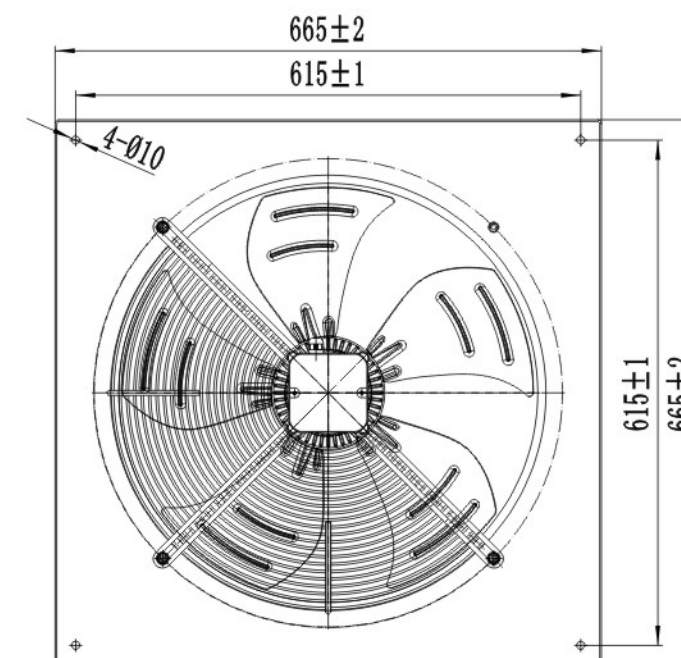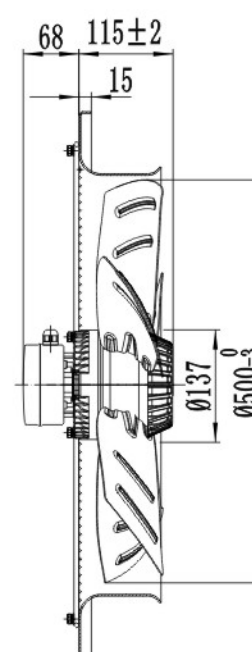

Φ500

Φ500



Ø500-7 系列轴流风机
Ø500-7 Series Axial Fan



材 质: 转子铸铝
Material: Rotor: Aluminum Casting

保护等级: IP54
Protection Class: IP54


绝缘等级: F
Insulation Class: F

轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings

B型网罩	C型网罩	D型网罩	G型网罩	F型正扣面板	F型反扣面板
Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
/	/	YWF.A4S-500S-7DIAT0	/	/	YWF.A4S-500S-7FIAT1
/	/	YWF.A4T-500S-7DIAT0	/	/	YWF.A4T-500S-7FIAT1

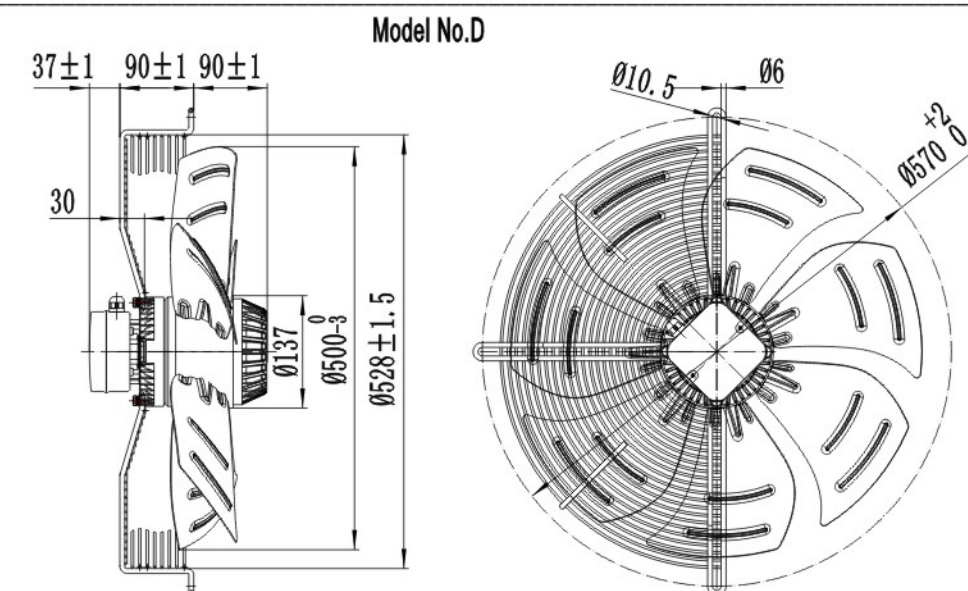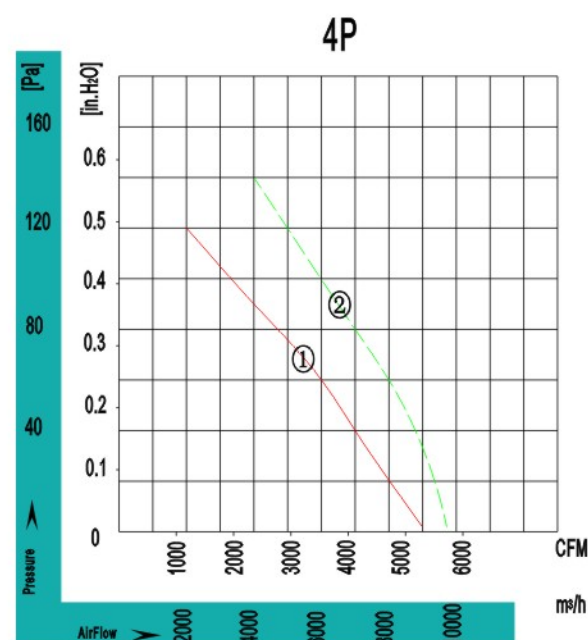

	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
E型导风筒												
Model No.E	V	Hz	A	W	RPM	μ F	m³/h / CFM	m³/h / CFM	dB (A)	Min / Max (°C)	#	
/	220/230	50	3.80	800	1380	16	8500 / 5015	5015	73	-30 / +60	①	CCC, CE, RoHS
/	/	60	4.50	950	1600	/	9500 / 5605	5605	75	-30 / +60	②	CCC, CE, RoHS
/	380/400	50	1.80	850	1380	/	8500 / 5015	5015	73	-30 / +60	①	CCC, CE, RoHS
/	/	60	1.80	950	1600	/	9500 / 5605	5605	75	-30 / +60	②	CCC, CE, RoHS

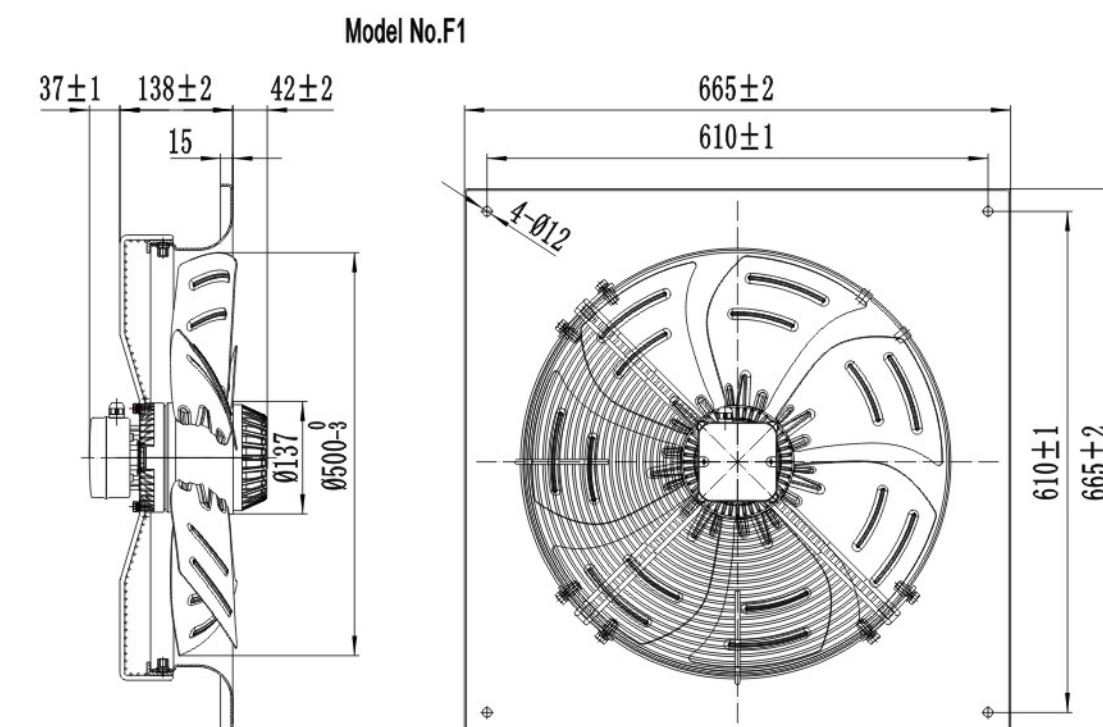

Φ550

Φ550



Ø550-5 系列轴流风机 Ø550-5 Series Axial Fan




材 质: 转子铸铝
Material: Rotor: Aluminum Casting

保护等级: IP54
Protection Class: IP54

绝缘等级: F
Insulation Class: F






轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings

B型网罩	C型网罩	D型网罩	G型网罩	F型正扣面板	F型反扣面板
Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
YWF.A4S-550S-5BIA00	YWF.A4S-550S-5CIA00	YWF.A4S-550S-5DIA00	YWF.A4S-550S-5GIA00	YWF.A4S-550S-5FIA00	YWF.A4S-550S-5FIA01
YWF.A4T-550S-5BIA00	YWF.A4T-550S-5CIA00	YWF.A4T-550S-5DIA00	YWF.A4T-550S-5GIA00	YWF.A4T-550S-5FIA00	YWF.A4T-550S-5FIA01
YWF.A6S-550S-5BIA00	YWF.A6S-550S-5CIA00	YWF.A6S-550S-5DIA00	YWF.A6S-550S-5GIA00	YWF.A6S-550S-5FIA00	YWF.A6S-550S-5FIA01
YWF.A6T-550S-5BIA00	YWF.A6T-550S-5CIA00	YWF.A6T-550S-5DIA00	YWF.A6T-550S-5GIA00	YWF.A6T-550S-5FIA00	YWF.A6T-550S-5FIA01

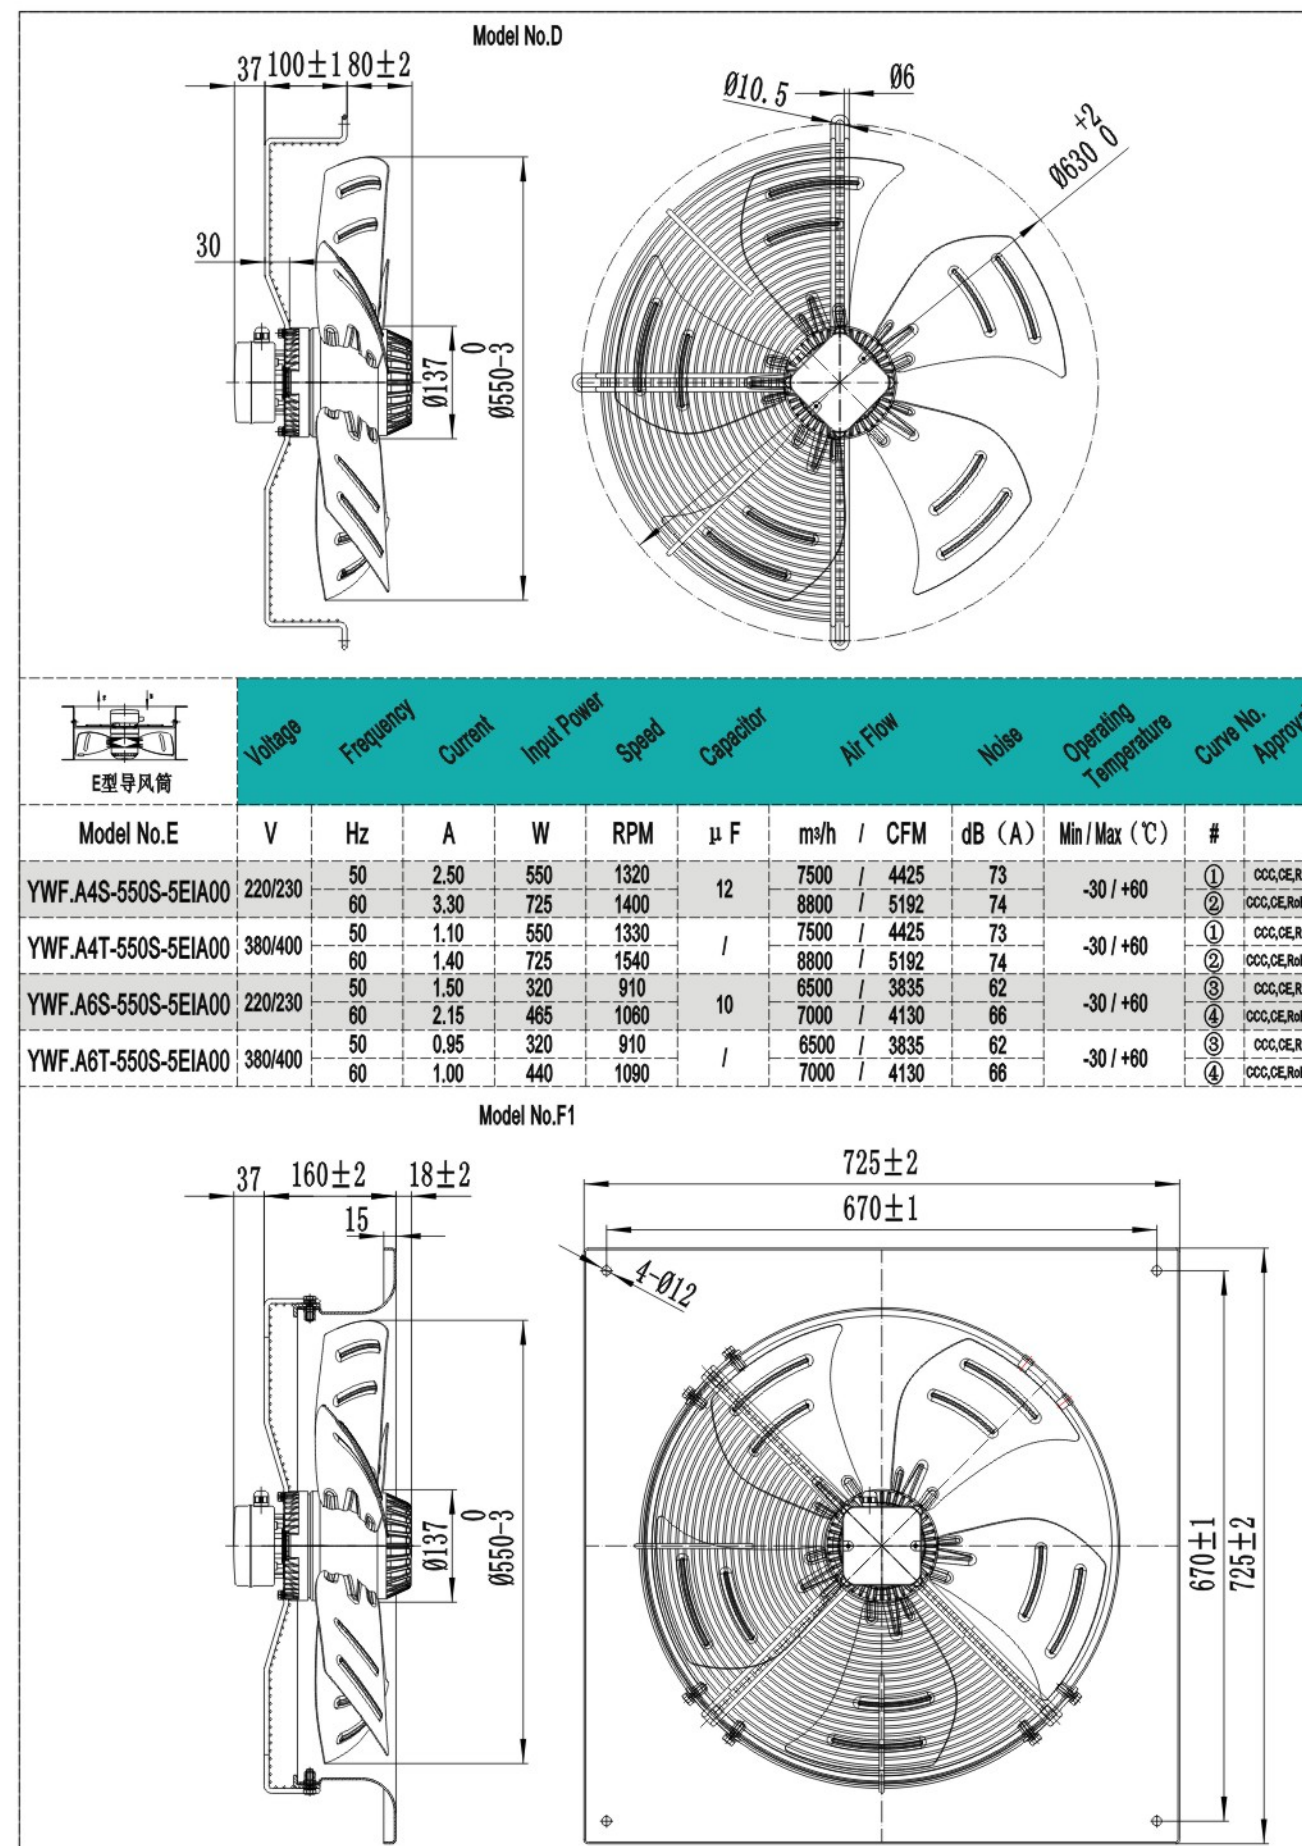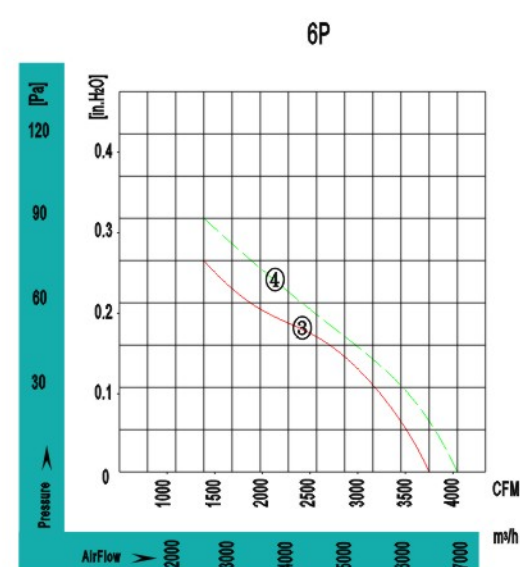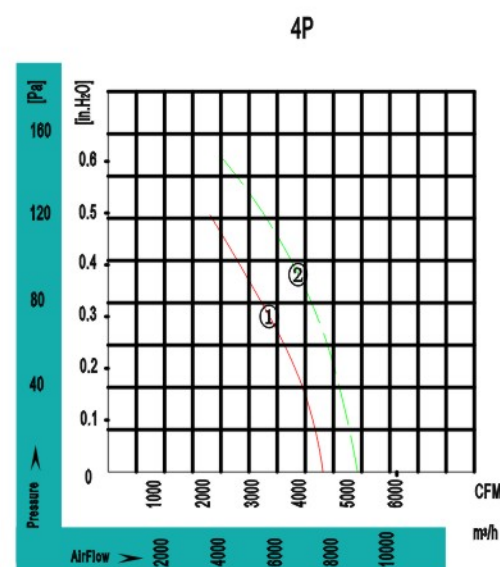

Φ550

Φ550

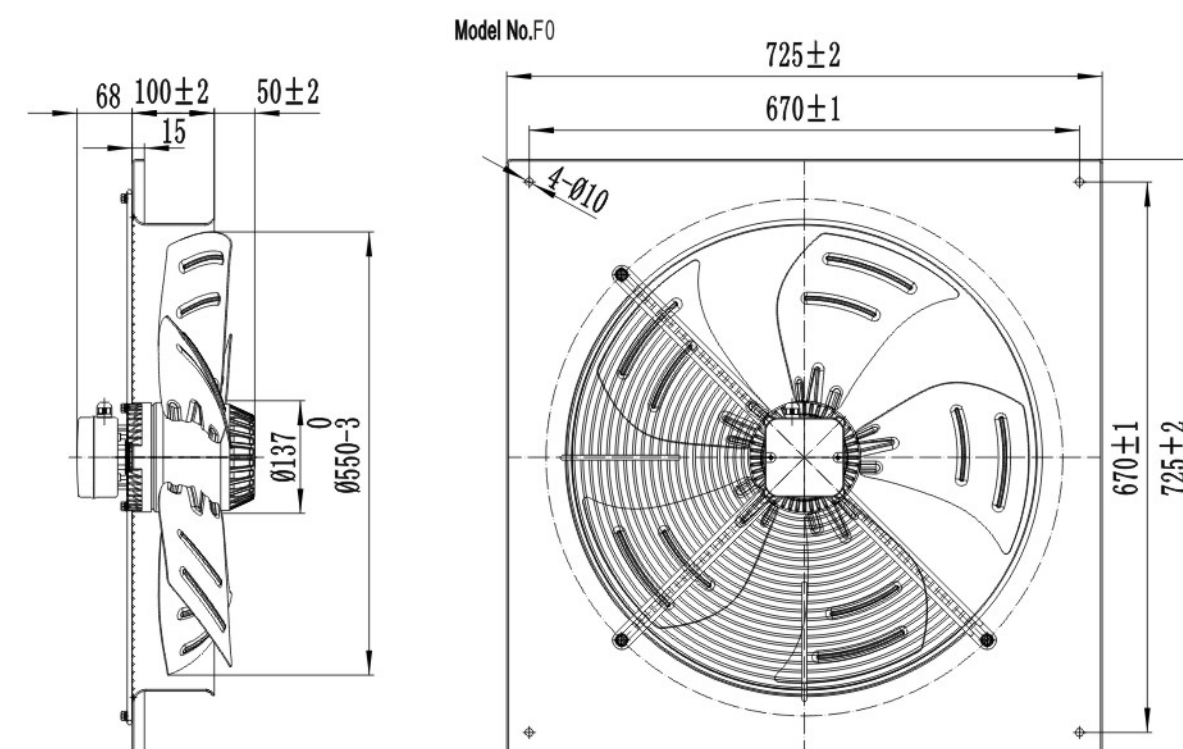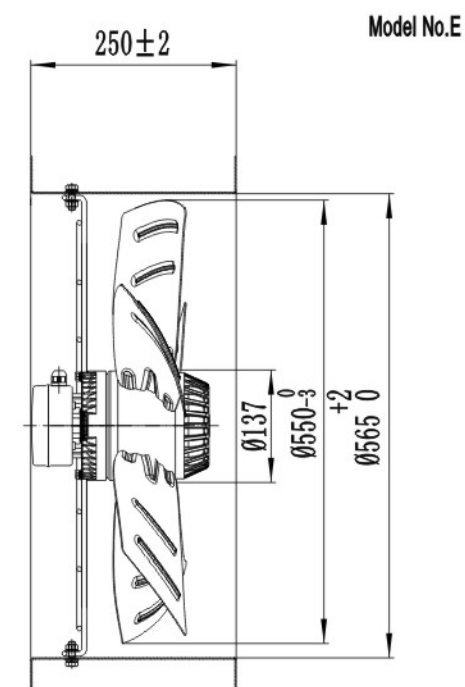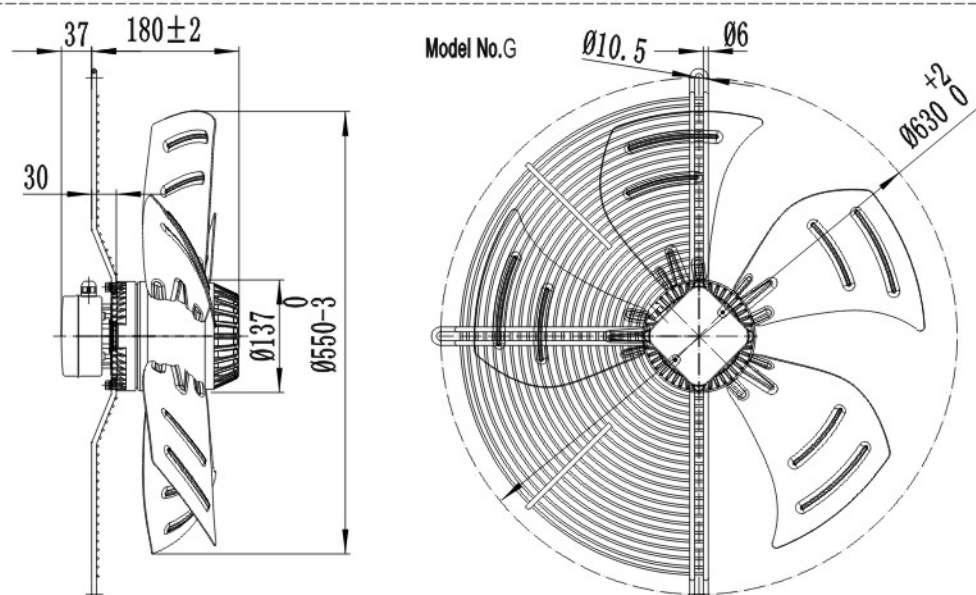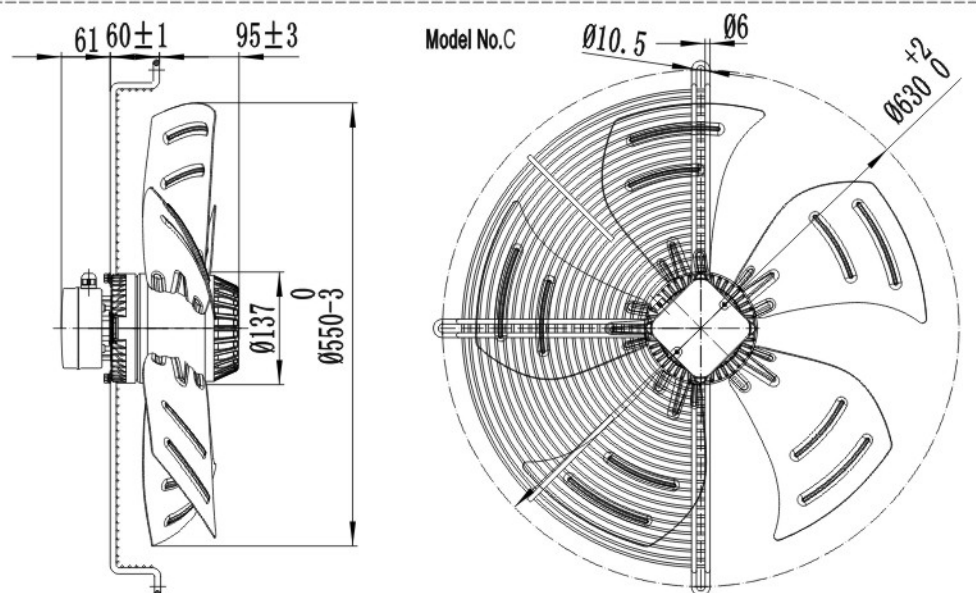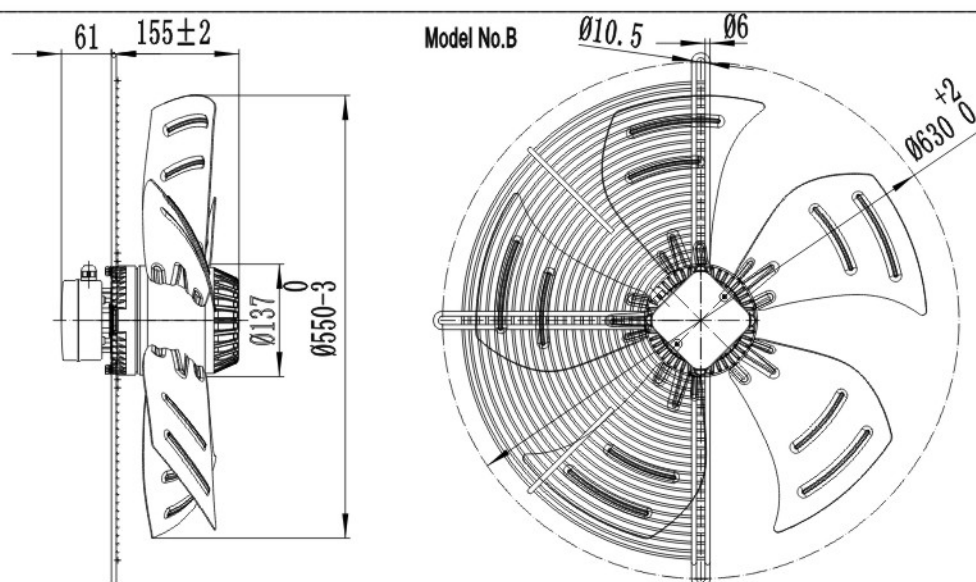

Φ600

Φ600



Ø600-5 系列轴流风机 Ø600-5 Series Axial Fan




材 质: 转子铸铝
Material: Rotor: Aluminum Casting

保护等级: IP54
Protection Class: IP54


绝缘等级: F
Insulation Class: F

轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings

B型网罩	C型网罩	D型网罩	G型网罩	F型正扣面板	F型反扣面板
Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
/	/	YWF.A4S-600S-5DIA00	/	/	YWF.A4S-600S-5FIA01
/	/	YWF.A4T-600S-5DIA00	/	/	YWF.A4T-600S-5FIA01
/	/	YWF.A6S-600S-5DIA00	/	/	YWF.A6S-600S-5FIA01
/	/	YWF.A6T-600S-5DIA00	/	/	YWF.A6T-600S-5FIA01

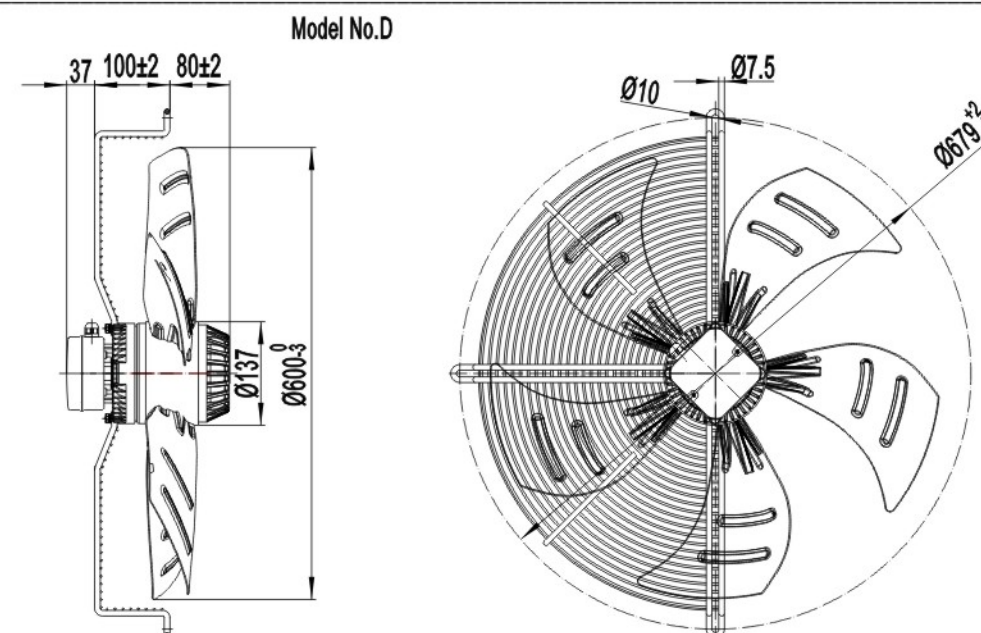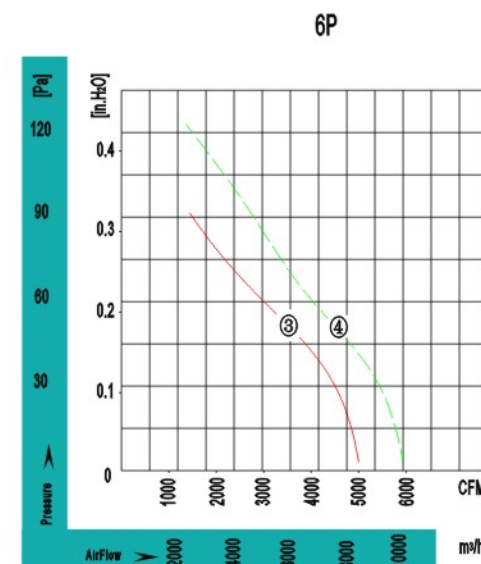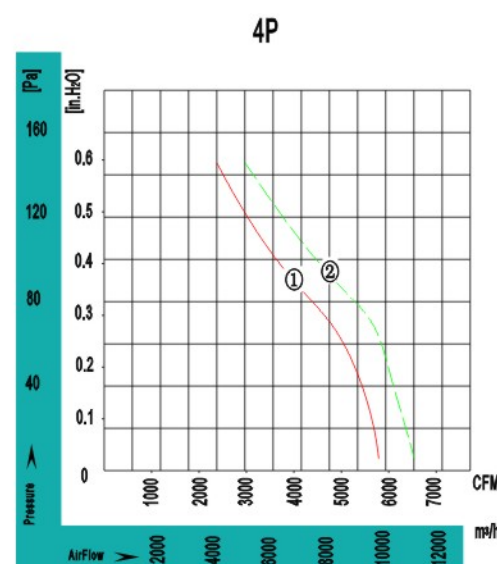

E型网罩	Voltage	Frequency	Current	Input Power	Capacitor	Speed	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
Model No.E	V	Hz	A	W	μF	R/min	m³/h / CFM	dB (A)	Min / Max (°C)	#	
/	220/230	50	3.80	800	16	1380	9500 / 5605	73	-30 / +60	①	CCC, CE, RoHS
/	/	60	4.20	920	/	1640	11000 / 6490	75	-30 / +60	②	CCC, CE, RoHS, UL
/	380/400	50	1.50	800	/	1350	9500 / 5605	73	-30 / +60	①	CCC, CE, RoHS
/	/	60	2.00	1000	/	1550	11000 / 6490	76	-30 / +60	②	CCC, CE, RoHS, UL
/	220/230	50	2.40	500	12	910	8500 / 5015	68	-30 / +60	③	CCC, CE, RoHS
/	/	60	2.94	640	/	1080	9700 / 5723	70	-30 / +60	④	CCC, CE, RoHS, UL
/	380/400	50	1.50	500	/	920	8500 / 5015	67	-30 / +60	③	CCC, CE, RoHS
/	/	60	1.50	650	/	1070	9700 / 5723	69	-30 / +60	④	CCC, CE, RoHS, UL

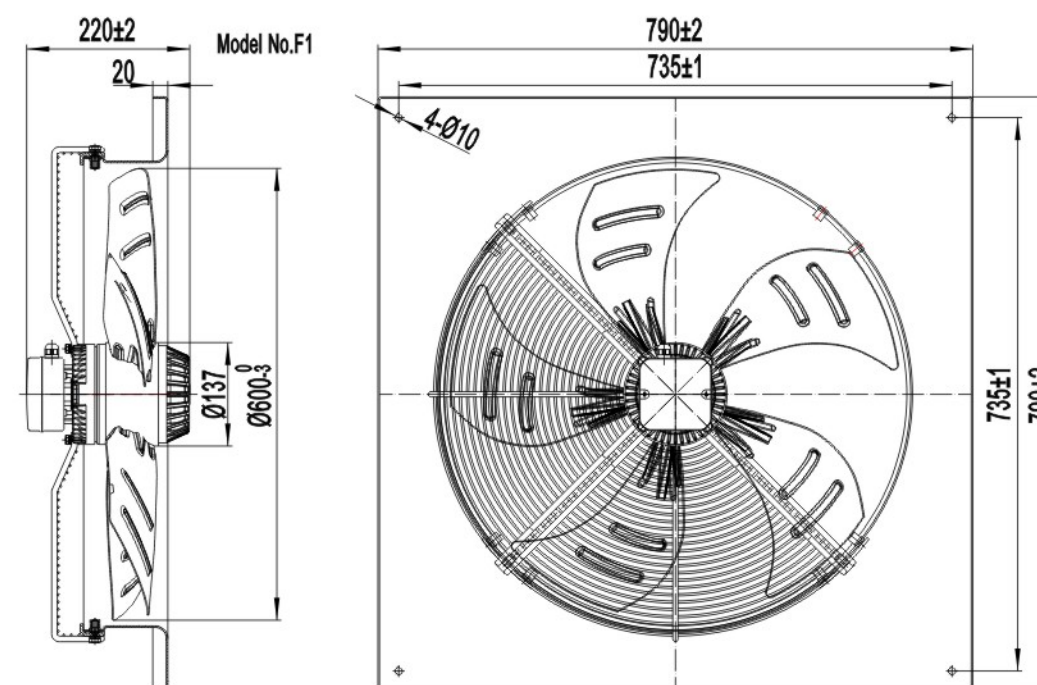

Φ630




Φ630



Ø630-5 系列轴流风机 Ø630-5 Series Axial Fan



材 质: 转子铸铝
Material: Rotor: Aluminum Casting
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings

B型网罩	C型网罩	D型网罩	G型网罩	F型正扣面板	F型反扣面板
Model No.B	Model No.C	Model No.D	Model No.G	Model No.F0	Model No.F1
YWF.A4S-630S-5BIA00	YWF.A4S-630S-5CIA00	YWF.A4S-630S-5DIA00	YWF.A4S-630S-5GIA00	YWF.A4S-630S-5FIA00	YWF.A4S-630S-5FIA01
YWF.A4T-630S-5BIA00	YWF.A4T-630S-5CIA00	YWF.A4T-630S-5DIA00	YWF.A4T-630S-5GIA00	YWF.A4T-630S-5FIA00	YWF.A4T-630S-5FIA01
YWF.A6S-630S-5BIA00	YWF.A6S-630S-5CIA00	YWF.A6S-630S-5DIA00	YWF.A6S-630S-5GIA00	YWF.A6S-630S-5FIA00	YWF.A6S-630S-5FIA01
YWF.A6T-630S-5BIA00	YWF.A6T-630S-5CIA00	YWF.A6T-630S-5DIA00	YWF.A6T-630S-5GIA00	YWF.A6T-630S-5FIA00	YWF.A6T-630S-5FIA01

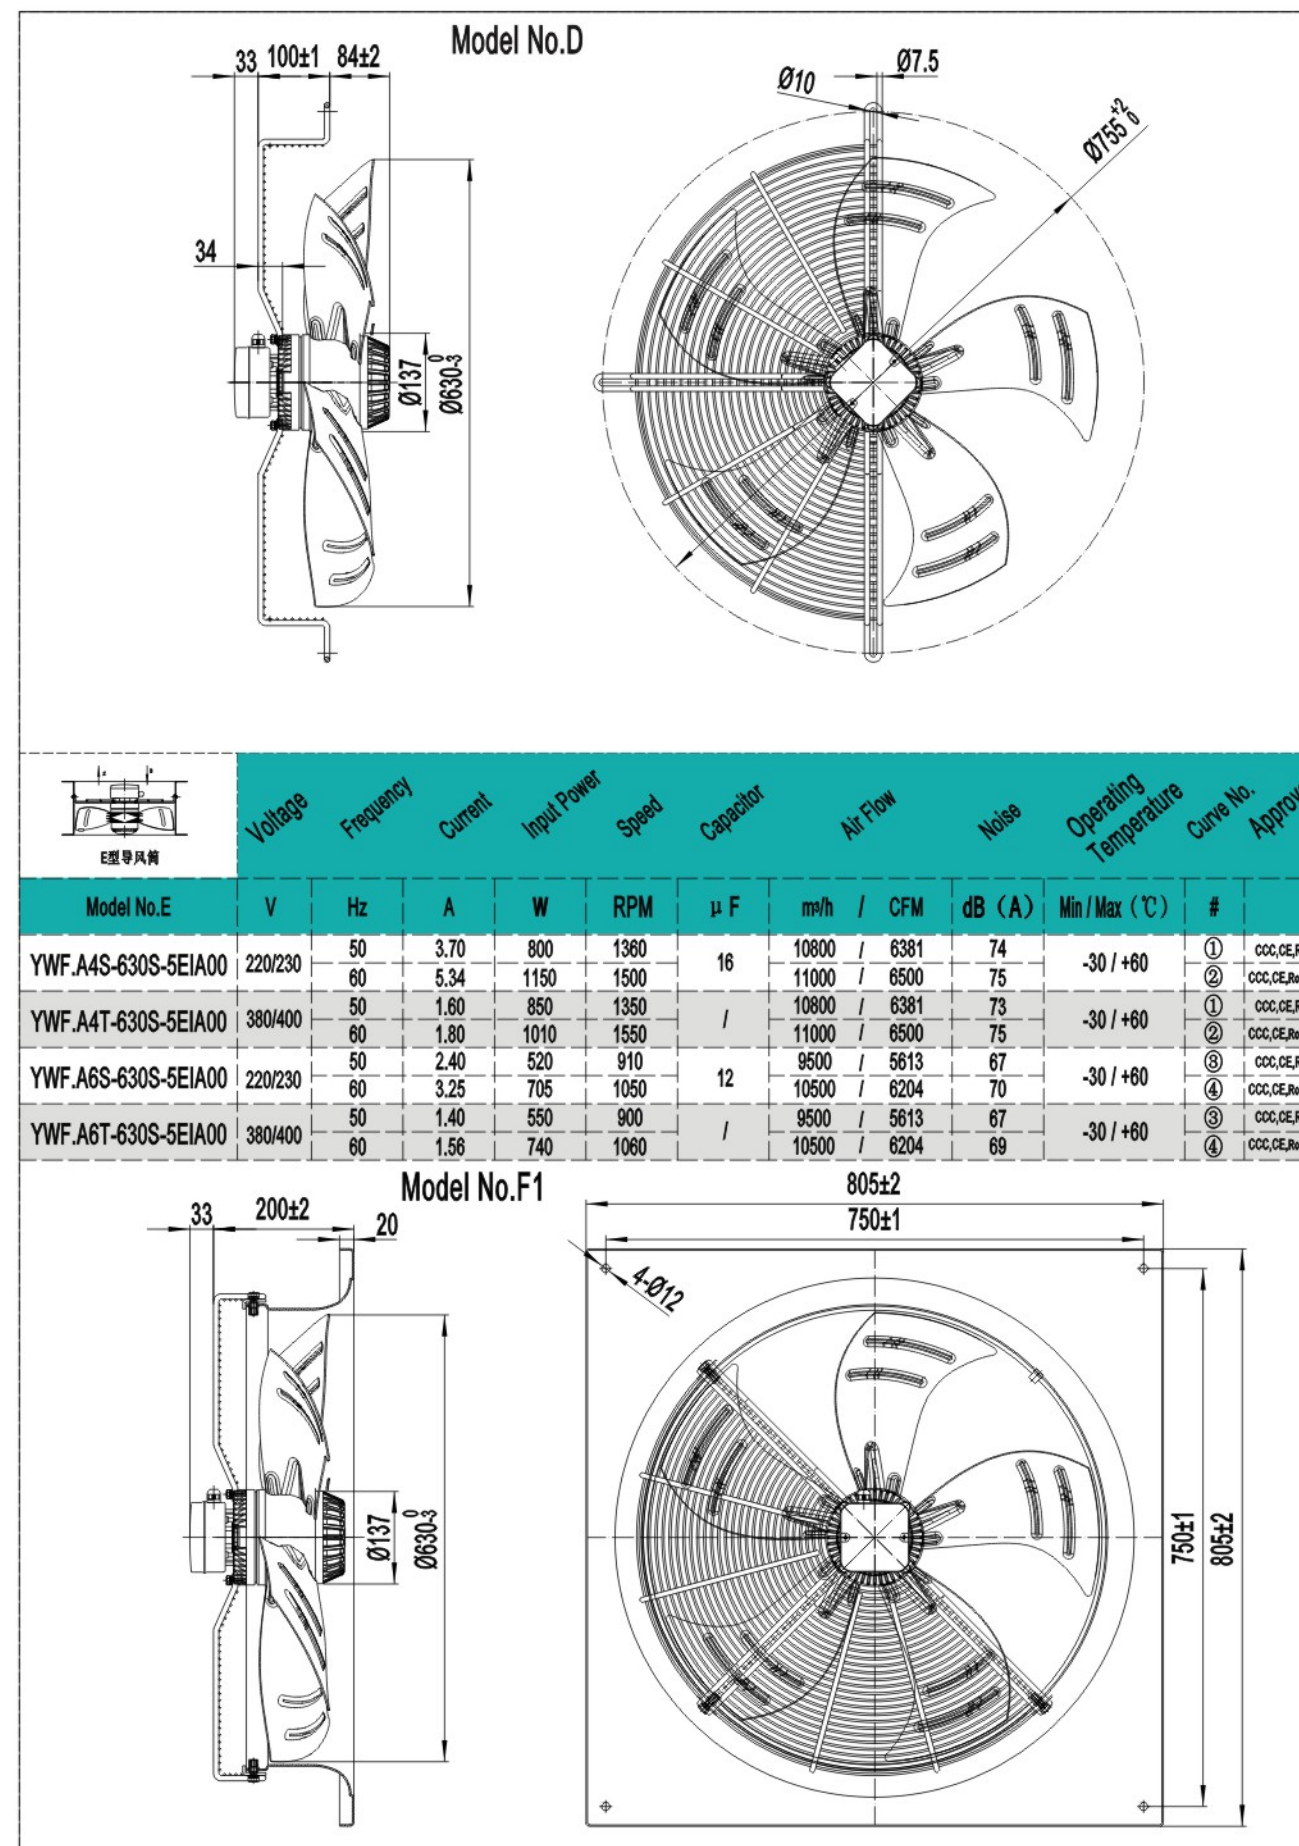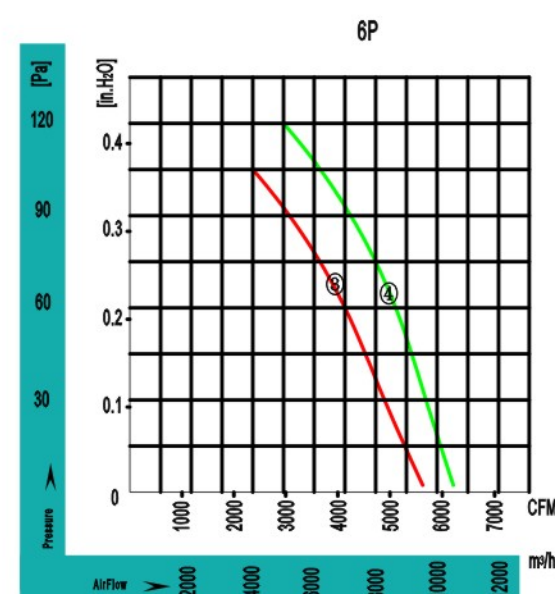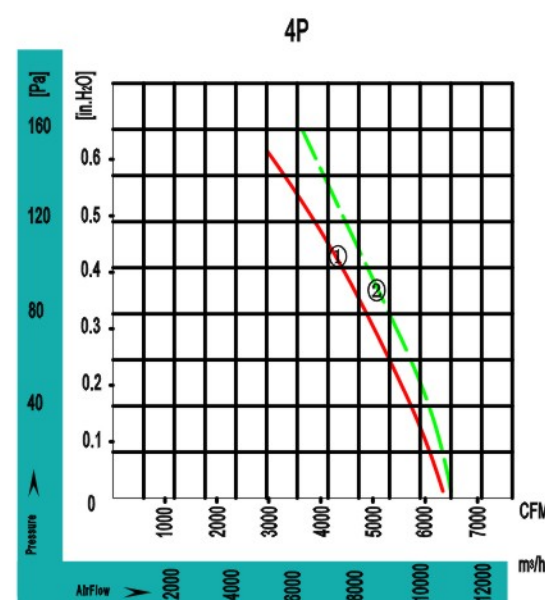

Φ630

Φ630

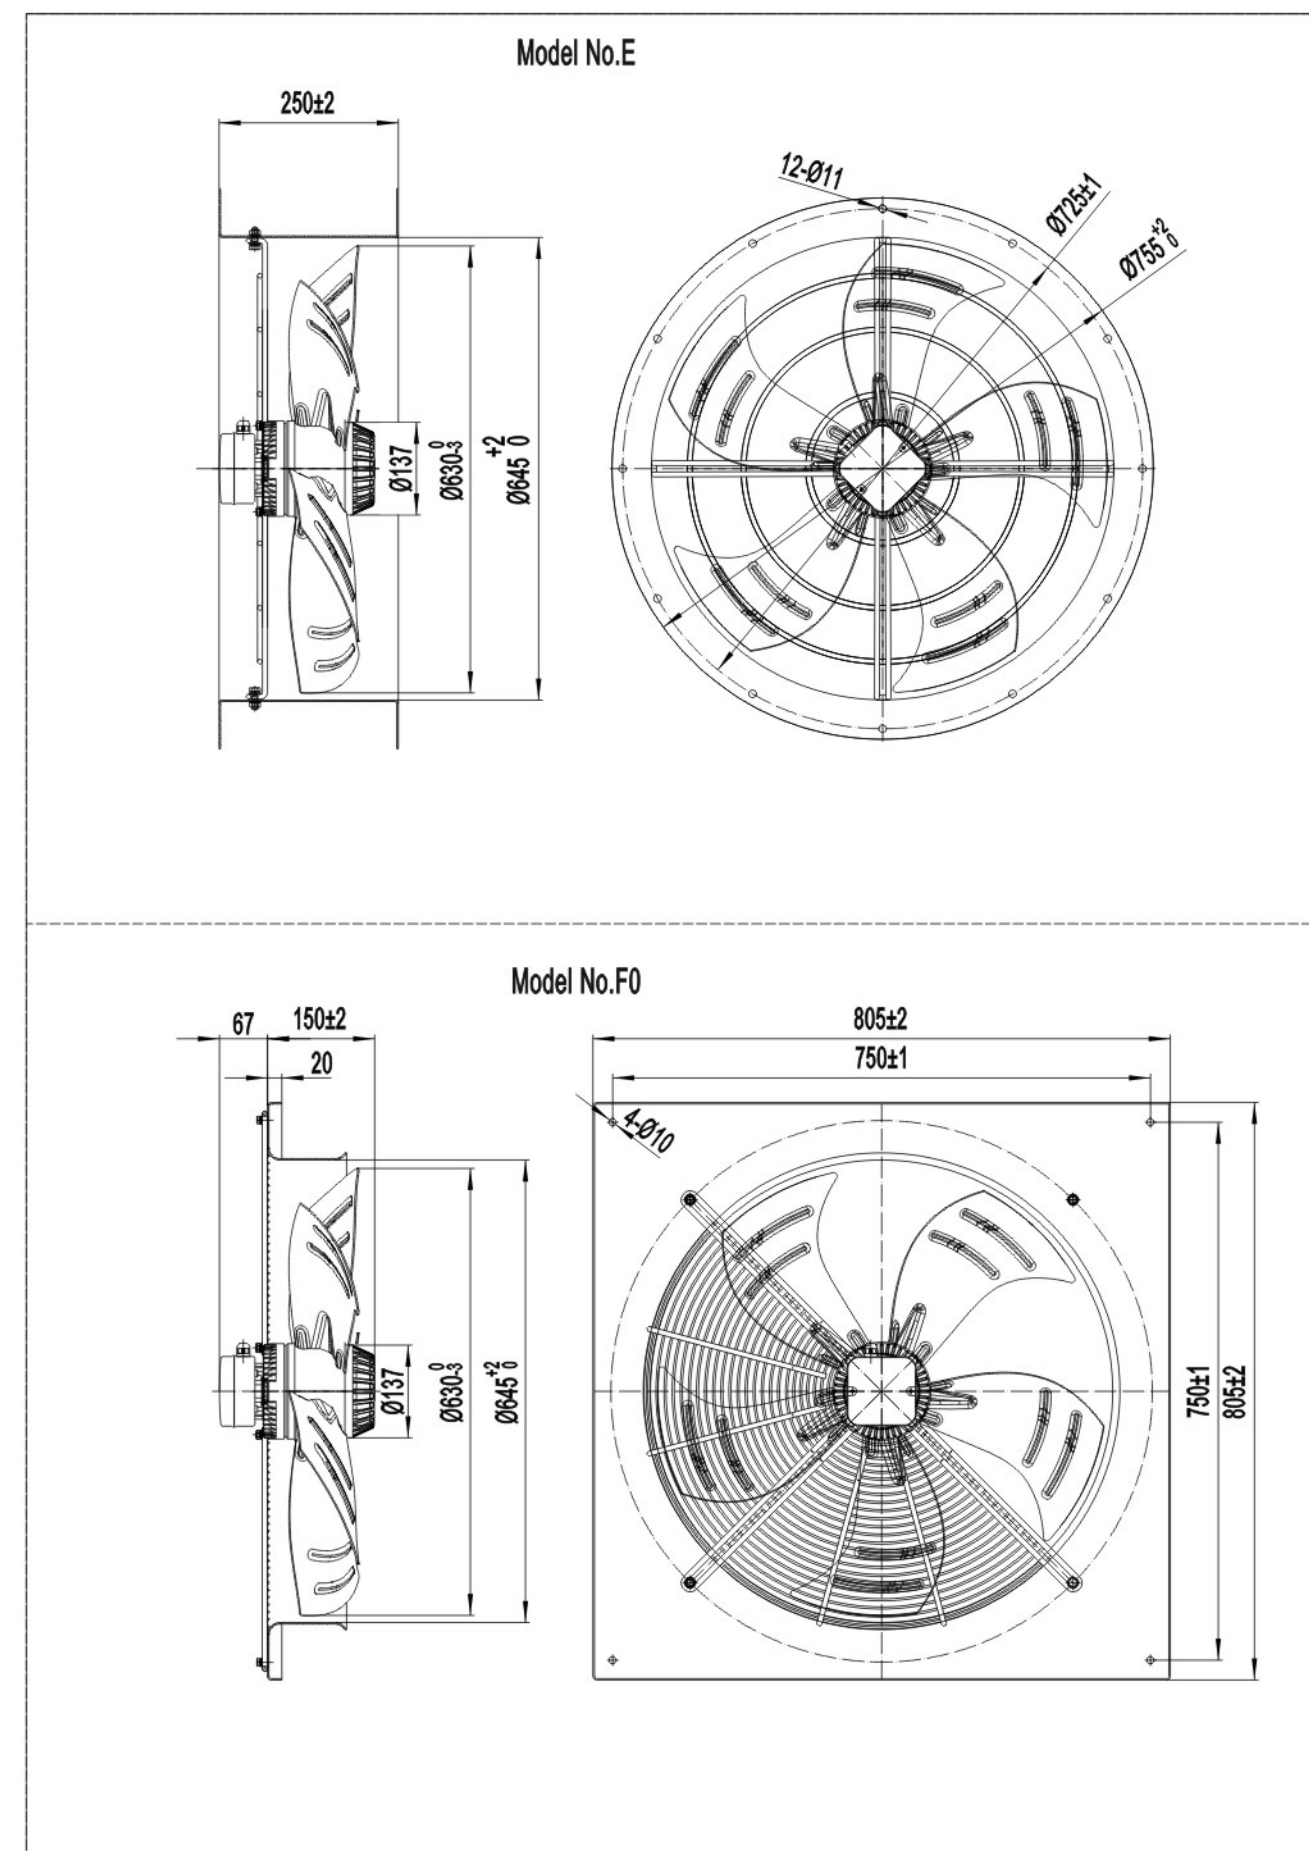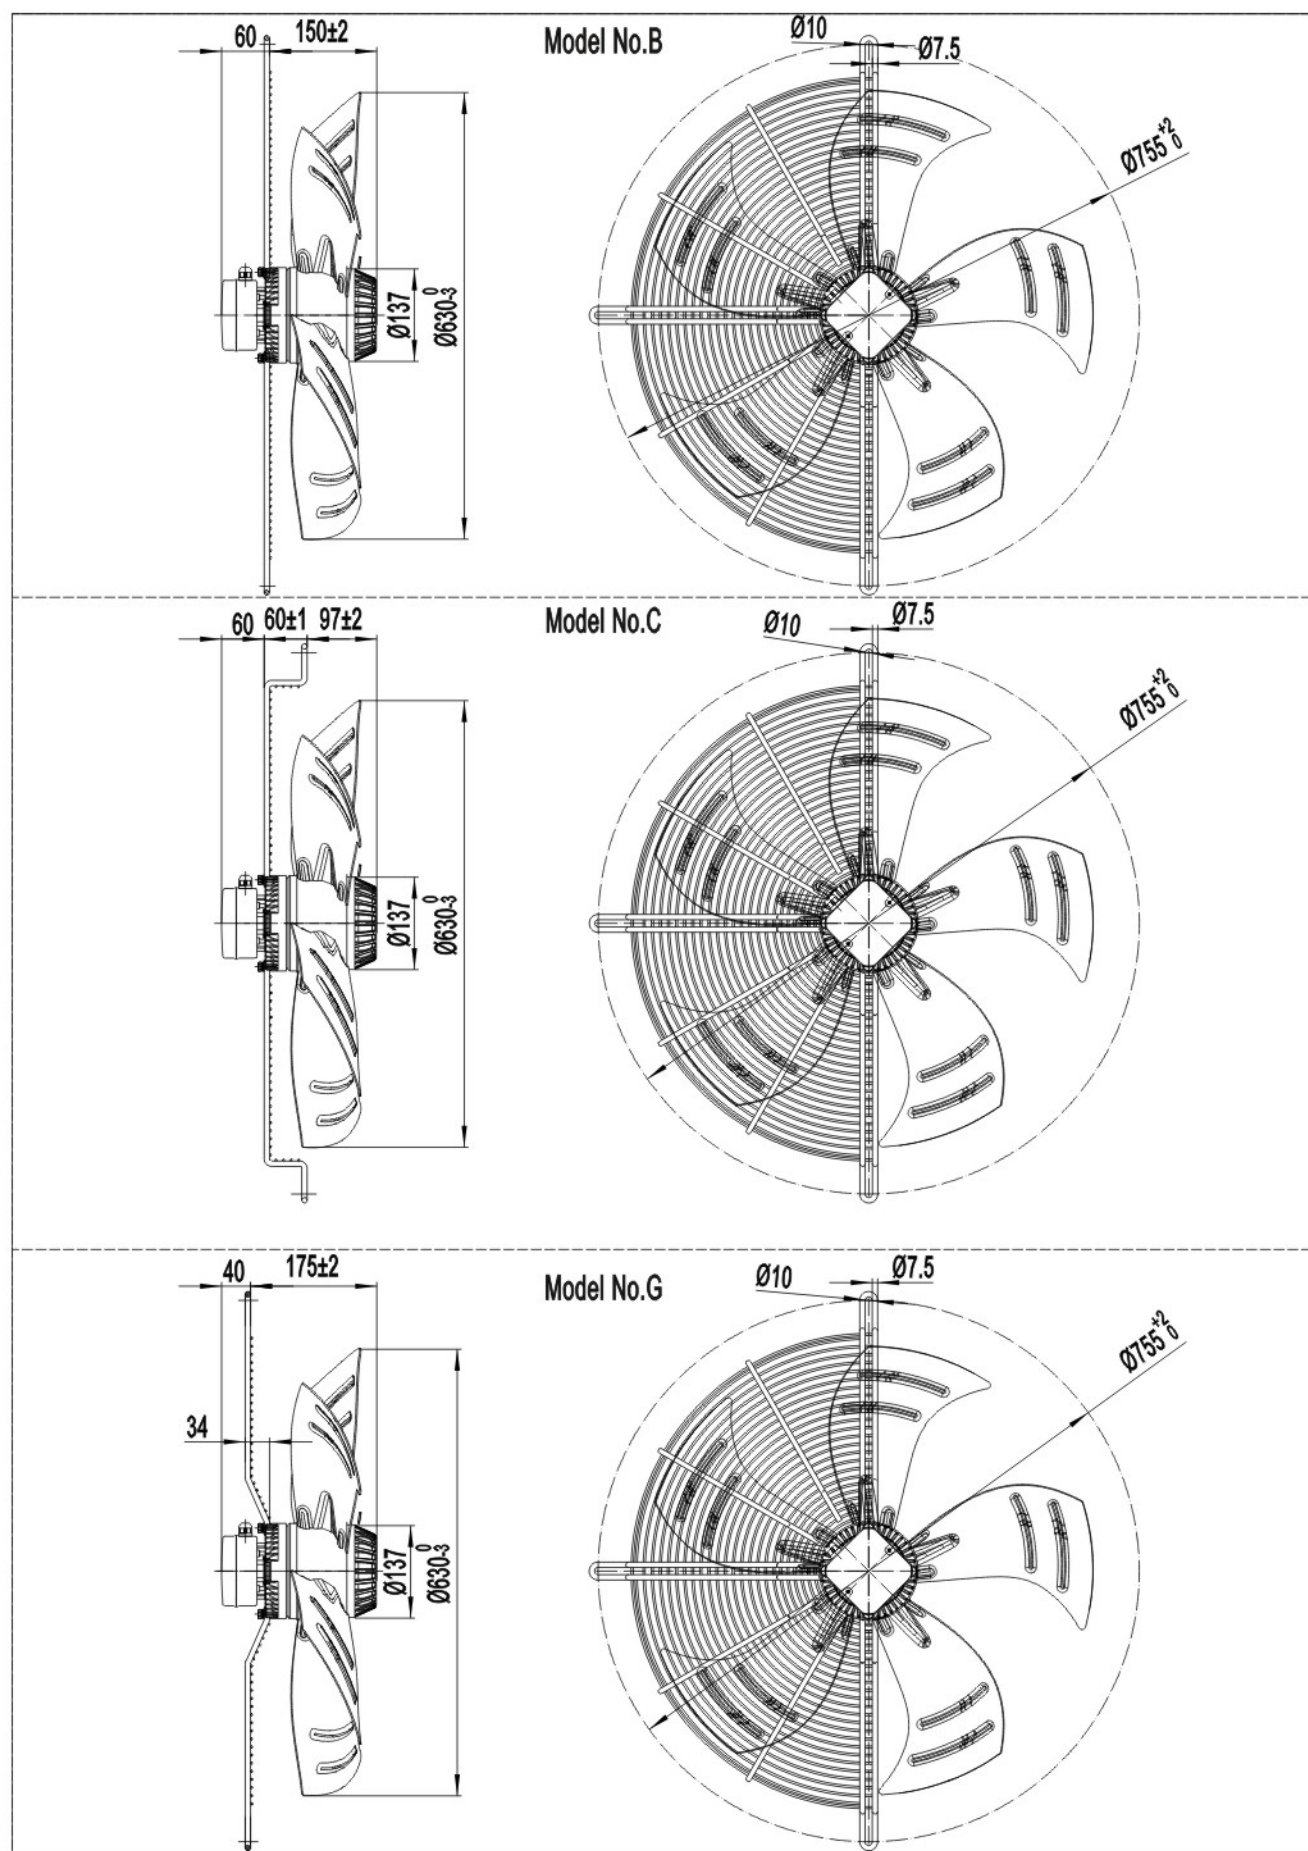

Φ630





Φ630



Ø630-7 180 系列轴流风机
Ø630-7 180 Series Axial Fan

材 质: 转子铸铝
Material: Rotor: Aluminum Casting
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings

F型正扣面板	F型反扣面板	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
Model No.F0	Model No.F1	V	Hz	A	W	RPM	μF	m³/h/ CFM	dB (A)	Min / Max (°C)	#	
YWF.A4T-630S-7FIS00	YWF.A4T-630S-7FIS01	380/400	50	3.00	1700	1350	/	17000/10030	76	-30 / +60	①	CCC,CE,RoHS
				2.00	1100	1100	/	12000/7080	74		②	CCC,CE,RoHS,UL
			60	4.20	2400	1550	/	19000/11210	78	-30 / +60	③	CCC,CE,RoHS
				1.80	1200	1200	/	13000/7670	73		④	CCC,CE,RoHS,UL
YWF.A6T-630S-7FIS00	YWF.A6T-630S-7FIS01	380/400	50	1.50	850	900	/	13500/7965	70	-30 / +60	⑤	CCC,CE,RoHS
				1.10	700	700	/	10500/6195	68		⑥	CCC,CE,RoHS
			60	2.30	1300	1050	/	15000/8850	73	-30 / +60	⑦	CCC,CE,RoHS
				1.40	850	750	/	11500/6785	70		⑧	CCC,CE,RoHS

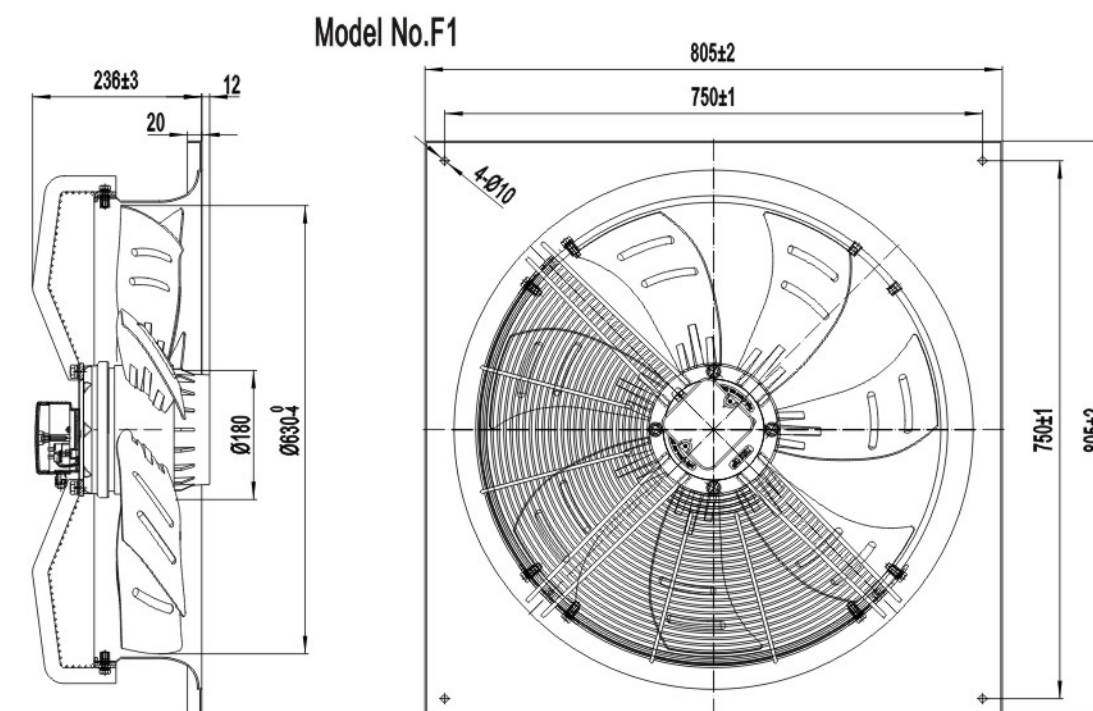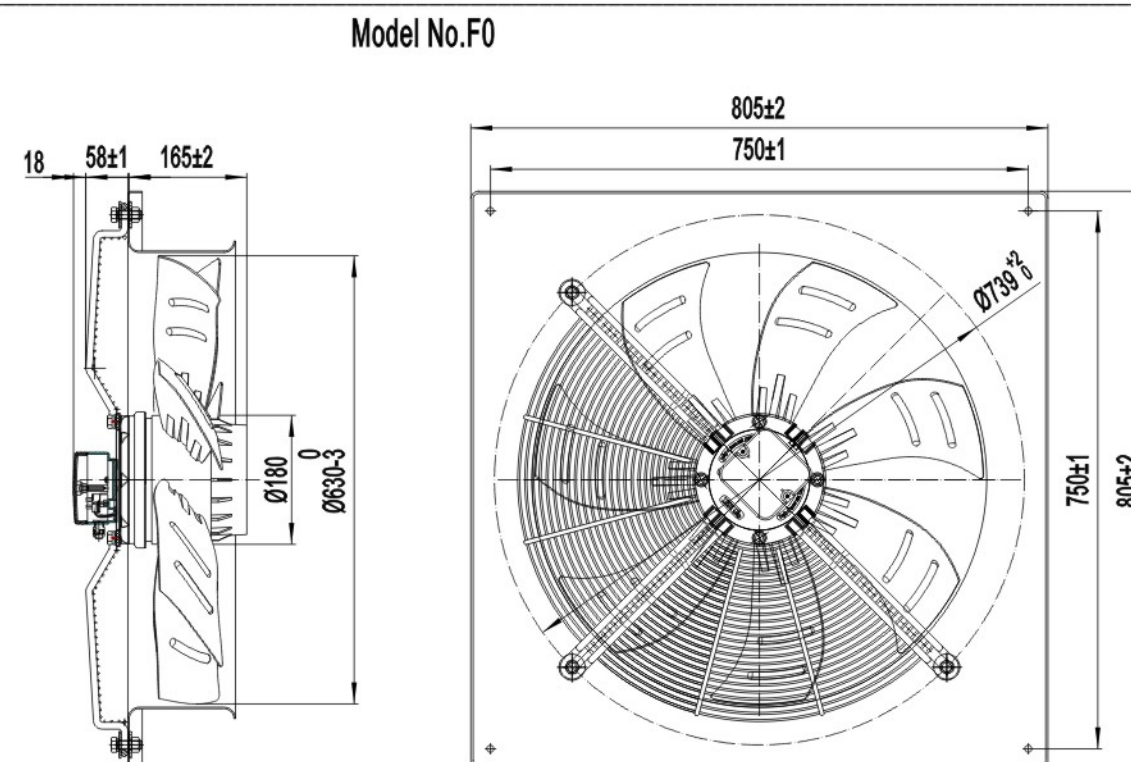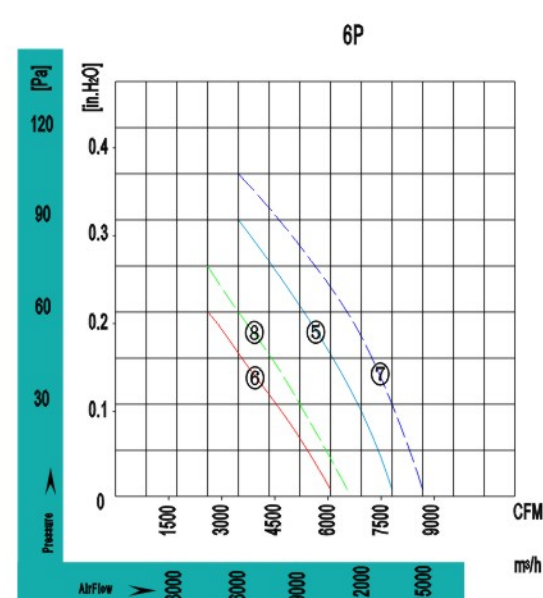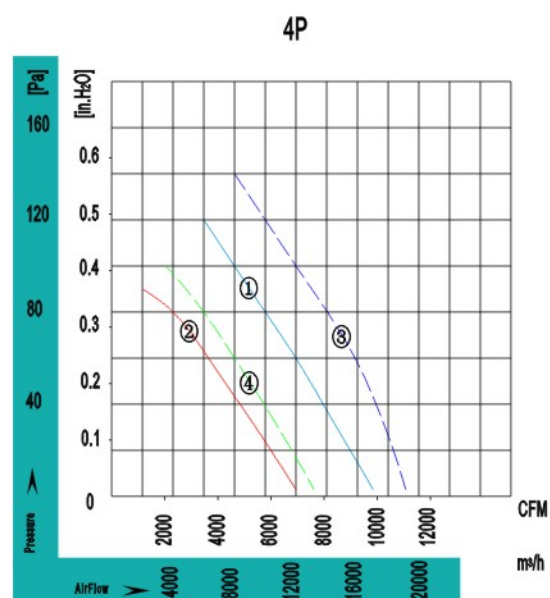



Φ710





Ø710-7 系列轴流风机
Ø710-7 Series Axial Fan

材 质: 转子铸铝
Material: Rotor: Aluminum Casting
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings

D型网罩	F型反扣面板	Voltage	Frequency	Current	Input Power	Speed	Capacitor	Air Flow	Noise	Operating Temperature	Curve No.	Approvals
Model No.D	Model No.F1	V	Hz	A	W	RPM	μ F	m³/h/ CFM	dB (A)	Min / Max (°C)	#	
YWF.A6T-710S-7DIS00	YWF.A6T-710S-7FIS01	380/400	50	2.00	1100	900	/	15500 / 8990	75	-30 / +60	①	CCC,CE,RoHS
				1.40	750	800		11600 / 6728	68		②	CCC,CE,RoHS,UL
				2.26	1250	1050		17000 / 9860	78		③	CCC,CE,RoHS
YWF.A8T-710S-7DIS00	YWF.A8T-710S-7FIS01	380/400	50	1.47	770	700	/	10300 / 6490	67	-30 / +60	④	CCC,CE,RoHS,UL
				1.50	700	700		12000 / 5974	67		⑤	CCC,CE,RoHS
				0.90	450	600		10000 / 5800	65		⑥	CCC,CE,RoHS
YWF.A6T-710S-7DIV00	YWF.A6T-710S-7FIV01	230/400	50	2.00	1100	900	/	15500 / 8990	75	-30 / +60	①	CCC,CE,RoHS
				3.40	1100	900		15500 / 8990	75		①	CCC,CE,RoHS

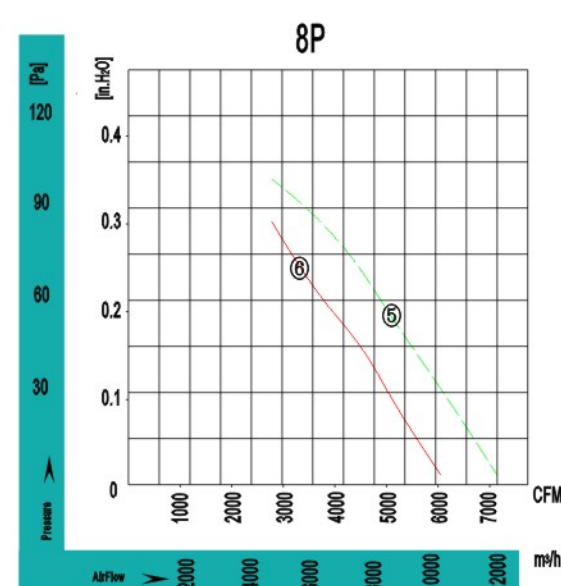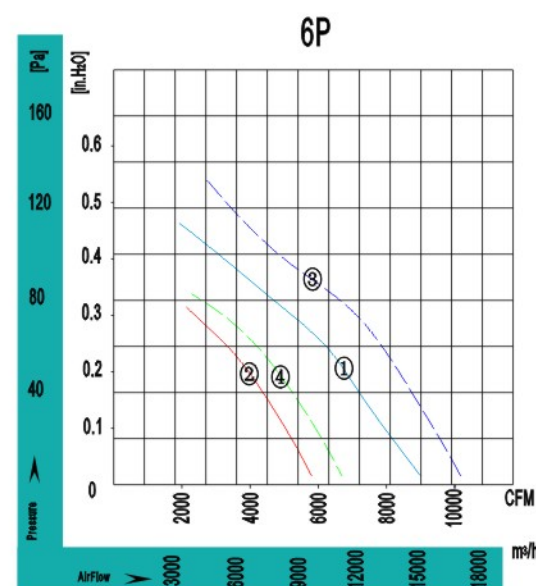

Φ710

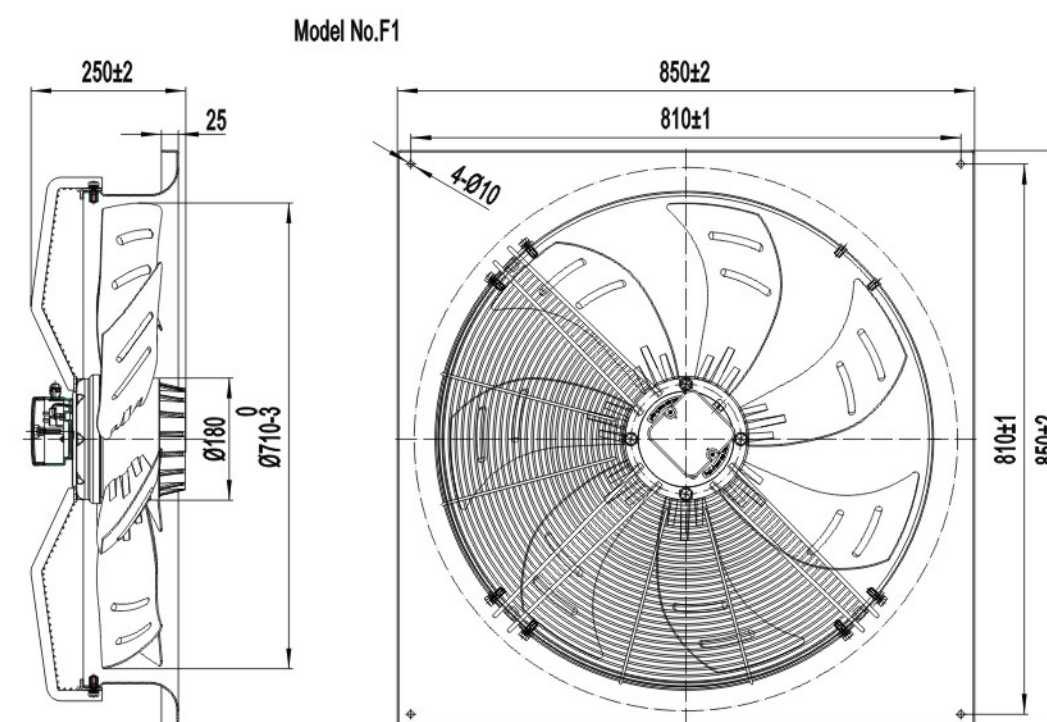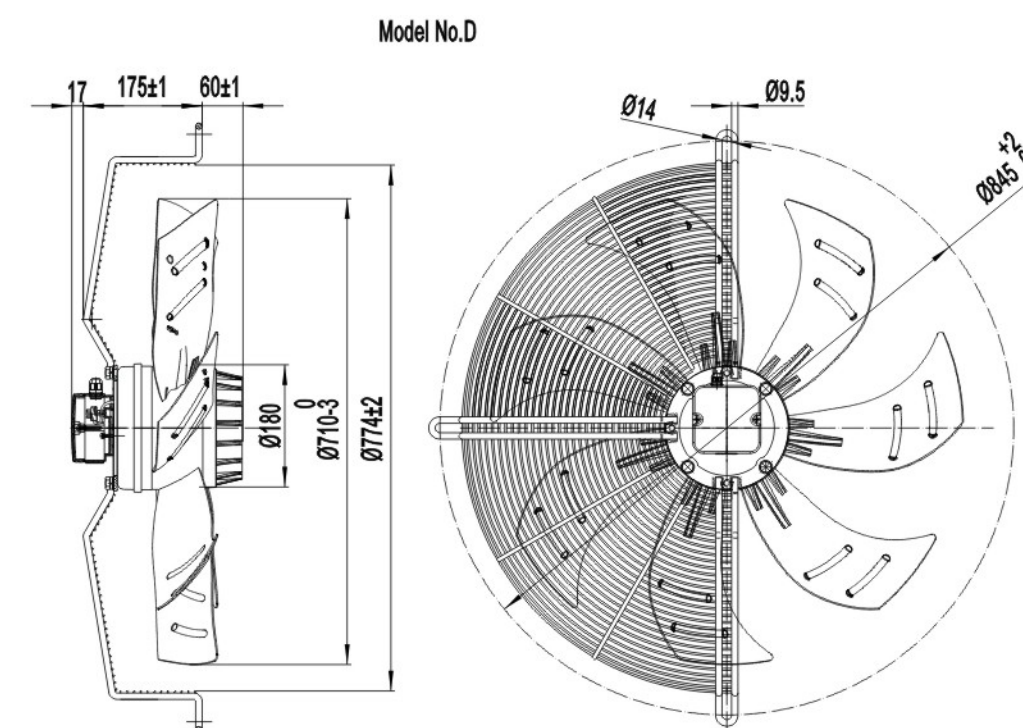

Φ800

Φ800



Ø800-7 系列轴流风机
Ø800-7 Series Axial Fan





材 质: 转子铸铝
Material: Rotor: Aluminum Casting

保护等级: IP54
Protection Class: IP54

绝缘等级: F
Insulation Class: F

轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings

Model No.D	Model No.F1	V	Hz	A	W	RPM	μ F	m³/h / CFM	dB (A)	Min / Max (°C)	#	Approvals
YWF.A6T-800S-7DIS00	YWF.A6T-800S-7FIS01	380/400	50	3.70 2.30 4.00	1850 1250 2200	900 700 1050	/	25000/14500 19000/11020 27000/15930	80 77 85	-30 / +60	① ② ③	CCC,CE,RoHS
YWF.A8T-800S-7DIS00	YWF.A8T-800S-7FIS01	380/400	50	1.70 1.00 2.10	700 550 1050	700 550 750	/	15500 / 9160 10500 / 6204 18500 / 10931	74 70 76	-30 / +60	④ ⑤ ⑥	CCC,CE,RoHS,UL
YWF.A6T-800S-7DIV00	YWF.A6T-800S-7FIV01	230/400	50	3.70 7.00	1850 1850	900 900	/	25000/14500 25000/14500	80 80	-30 / +60	⑦ ⑧ ①	CCC,CE,RoHS,UL CCC,CE,RoHS

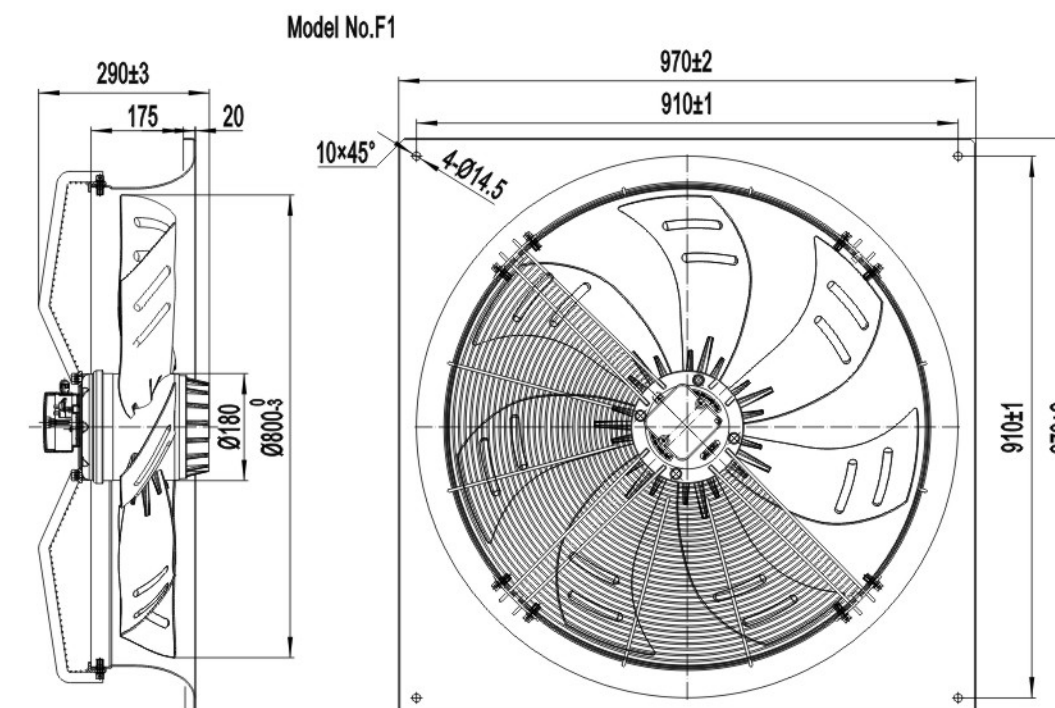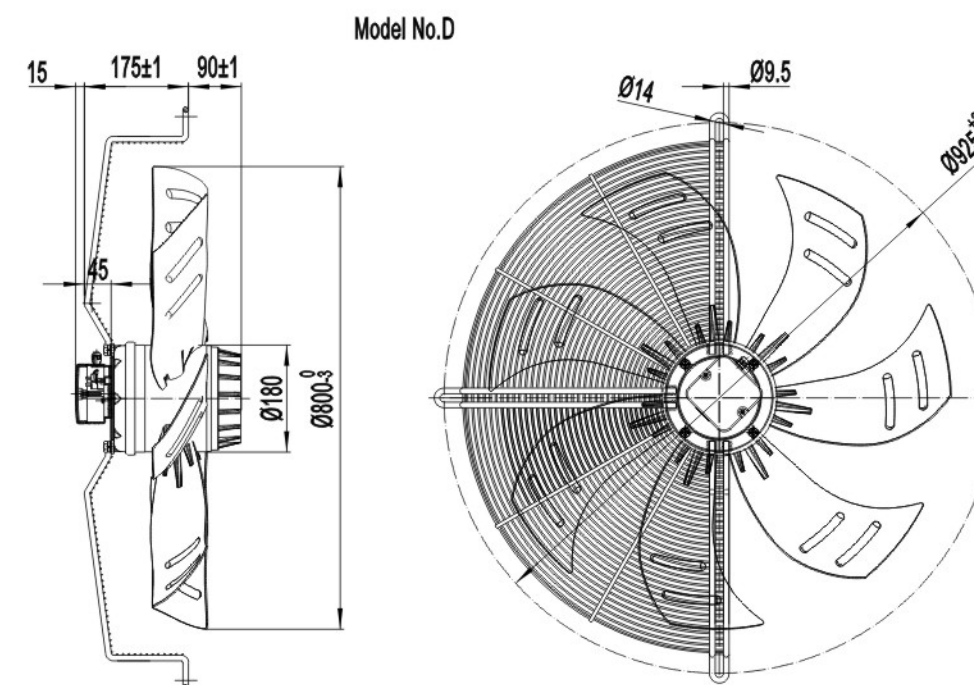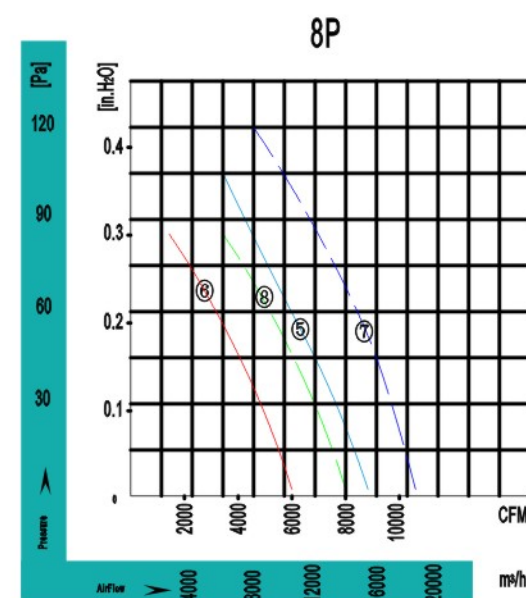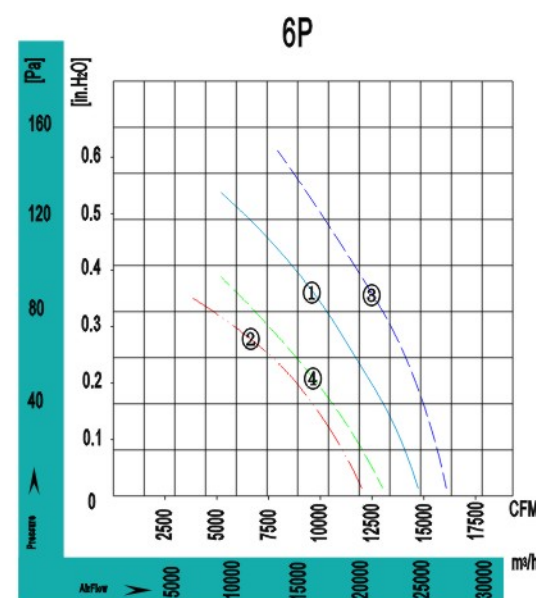


Φ900

Φ900



Ø900-7 系列轴流风机
Ø900-7 Series Axial Fan

材 质: 转子铸铝
Material: Rotor: Aluminum Casting
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearings: Ball Bearings



Model No.D	Model No.F1	V	Hz	A	W	RPM	μ F	m³/h / CFM	dB (A)	Min / Max (°C)	#
YWF.A6T-900S-7DIS00	YWF.A6T-900S-7FIS01	380/400	50	4.00 2.40	2000 1300	900 750	/	27000 / 15930 21500 / 12685	80 78	-30 / +60	① CCC,CE,RoHS ② CCC,CE,RoHS
YWF.A8T-900S-7DIS00	YWF.A8T-900S-7FIS01	380/400	50	2.80 1.40	1300 800	700 600	/	20000 / 11800 16000 / 9440	76 72	-30 / +60	③ CCC,CE,RoHS ④ CCC,CE,RoHS

